



旭川化学

XUCHUAN CHEMICAL

Professional Manufacturer of Polyurethane

专业的聚氨酯制造商

CREATE
BETTER
LIFE

XUCHUAN CHEMICAL(SUZHOU)CO.,LTD
www.chinaxuchuan.com

Operating data



7 billion yuan
in 2021



Overseas business in
40 countries



TOP2 Domestic
market share



750000 tons
total capacity



1200+
employees



4 production sites
1 Under construction

Primary business & Market



- Polyurethane resin for artificial leather
- Polyurethane system for shoe sole
- Polyester polyol

R&D center


- Suzhou Large Enterprise Leading Enterprise Advanced Technology Research Institute
- Provincial Polyurethane Application Engineering Technology Center
- Key high-tech enterprises of the National Torch Program
- Jiangsu Postdoctoral Innovation Experimental Base
- 138+ PhD and Master in polyurethane industry

Production sites



Enterprise scale

Production ability

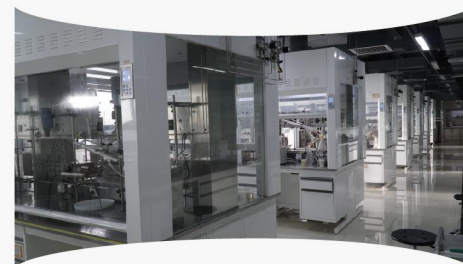

INTELLIGENT MANUFACTURING SYSTEM
PROFESSIONAL TECHNICAL TEAM
SOPHISTICATED EQUIPMENT

Pu System For Shoe Sole



Capacity



250000
tons/year

Characteristics



Good
anti-abrasive



Flexing resistance



Anti-oil



Good
anti-slipping

Applications



Slippers



Safety shoes



Insole



Lady's high heel shoes

POLYETHER

Code	Molded Density(g/cm ³)	Hardness	Application
XC-1014S/XC-5301S	0.28-0.60	24-45C	Insole
XC-1700N/XC-5300	0.40-0.50	45-60A	Outsole
XC-1065N/XC-5009	0.50-0.70	65-80C	Marine fender, shock absorption mat and polyether outsole

POLYESTER INSOLE

Code	Molded Density(g/cm ³)	Hardness	Application
XC-2230S/XC-6230T	0.3-0.4	30-40C	Insole, slippers and soft children's shoes
XC-2260/XC-8580	0.30-0.45	43-58A	Outsole and slippers
XC-2088/XC-6230T	0.33-0.45	45-60C	Insole, slippers and soft children's shoes
XC-8060F/XC-6230T	0.40-0.55	60-85C	Common cold resistance soft out-sole

OUTSOLE

Code	Molded Density(g/cm ³)	Hardness	Application
XC-9002F/XC-8280	0.38-0.48	70-80C	Woman wedge sandals and out-sole

SAFETY SHOES

Code	Molded Density(g/cm ³)		Hardness(Shore A)		Application
XC-6002C/XC-8280	sole 0.8-1.1	mid-sole 0.45-0.55	sole 55-70	mid-sole 38-50	Double density sole system for common safety shoes and one-step forming casual shoes,outsole
XC-6002/XC-8280	sole 0.8-1.1	mid-sole 0.45-0.55	sole 55-70	mid-sole 38-50	Cold resistance double density sole system for common safety shoes and one-step forming casual shoes,outsole

HIGH-HARDNESS POLYESTER

Code	Molded Density(g/cm ³)	Hardness	Application
XC-9020/XC-6088	0.25-0.40	88-98A	Common sole,in-sole,slippers
XC-9080W/XC-6088	0.30-0.40	55-85A	Outsole,slippers,wedge shoes
XC-9100S/XC-6088	0.30-0.40	55-80A	Outsole,slippers,wedge shoes



www.xuchuanchem.com

Xuchuan

XUCHUAN CHEMICAL(SUZHOU)CO.,LTD

Professional Manufacturer of Polyurethane



service@chinaxuchuan.com



0512-53981888/+8613913782587



No.3, Xiexin Road, Taicang Port Development
Zone, Taicang City, Jiangsu , China (215434)

All pictures from the network,if there is infringement,please contact us to delete

xuchuan