



旭川化学

XUCHUAN CHEMICAL

Professional Manufacturer of Polyurethane
专业的聚氨酯制造商

A GREAT
BETTER
LIFE

XUCHUAN CHEMICAL(SUZHOU)CO.,LTD
www.chinaxuchuan.com



Enterprise scale

Operating data



7 billion yuan
in 2021



Overseas business in
40 countries



TOP2 Domestic
market share



750000 tons
total capacity



1200+
empolyees



4 production sites
1 Under construction

Primary business & Market



- Polyurethane resin for artificial leather
- Polyurethane system for shoe sole
- Polyester polyol

R&D center

- Suzhou Large Enterprise Leading Enterprise Advanced Technology Research Institute
- Provincial Polyurethane Application Engineering Technology Center
- Key high-tech enterprises of the National Torch Program
- Jiangsu Postdoctoral Innovation Experimental Base
- 138+PhD and Master in polyurethane industry

Production sites



XUCHUAN CHEMICAL
(SUZHOU) CO.,LTD (Western District)



XUCHUAN CHEMICAL
(SUZHOU) CO.,LTD (Eastern District)




ZHEJIANG XUCHUAN CHEMICAL CO.,LTD



XUCHUAN CHEMICAL (KUNSHAN)
CO.,LTD

Production ability

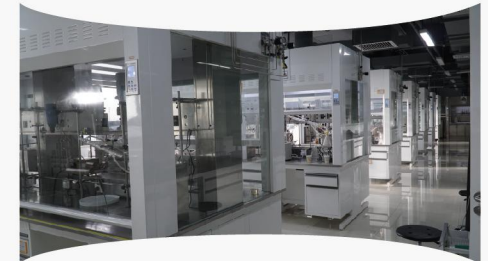

INTELLIGENT MANUFACTURING SYSTEM
PROFESSIONAL TECHNICAL TEAM
SOPHISTICATED EQUIPMENT

Pu System For Shoe Sole



Capacity



250000
tons/year

Characteristics



Good
anti-abrasive



Flexing resistance



Anti-oil



Good
anti-slipping

Applications



Slippers



Safety shoes



Insole



Lady's high heel shoes

POLYETHER

Code	Molded Density(g/cm ³)	Hardness	Application
XC-1014S/XC-5301S	0.28-0.60	24-45C	Insole
XC-1700N/XC-5300	0.40-0.50	45-60A	Outsole
XC-1065N/XC-5009	0.50-0.70	65-80C	Marine fender, shock absorption mat and polyether outsole

POLYESTER INSOLE

Code	Molded Density(g/cm ³)	Hardness	Application
XC-2230S/XC-6230T	0.3-0.4	30-40C	Insole, slippers and soft children's shoes
XC-2260/XC-8580	0.30-0.45	43-58A	Outsole and slippers
XC-2088/XC-6230T	0.33-0.45	45-60C	Insole, slippers and soft children's shoes
XC-8060F/XC-6230T	0.40-0.55	60-85C	Common cold resistance soft out-sole

OUTSOLE

Code	Molded Density(g/cm ³)	Hardness	Application
XC-9002F/XC-8280	0.38-0.48	70-80C	Woman wedge sandals and out-sole

SAFETY SHOES

Code	Molded Density(g/cm ³)		Hardness(Shore A)		Application
XC-6002C/XC-8280	sole 0.8-1.1	mid-sole 0.45-0.55	sole 55-70	mid-sole 38-50	Double density sole system for common safety shoes and one-step forming casual shoes,outsole
XC-6002/XC-8280	sole 0.8-1.1	mid-sole 0.45-0.55	sole 55-70	mid-sole 38-50	Cold resistance double density sole system for common safety shoes and one-step forming casual shoes,outsole

HIGH-HARDNESS POLYESTER

Code	Molded Density(g/cm ³)	Hardness	Application
XC-9020/XC-6088	0.25-0.40	88-98A	Common sole,in-sole,slippers
XC-9080W/XC-6088	0.30-0.40	55-85A	Outsole,slippers,wedge shoes
XC-9100S/XC-6088	0.30-0.40	55-80A	Outsole,slippers,wedge shoes



www.xuchuanchem.com

Xuchuan

XUCHUAN CHEMICAL(SUZHOU)CO.,LTD

Professional Manufacturer of Polyurethane

✉ service@chinaxuchuan.com

☎ 0512-53981888/+8613913782587

🏠 No.3, Xiexin Road, Taicang Port Development Zone, Taicang City, Jiangsu , China (215434)

All pictures from the network,if there is infringement,please contact us to delete

Xuchuan