

**NS-2920-500 / NS-2920-650**

**全自動洗衣染色機**

**Automatic Garment Washing and Dyeing Machine**



**NS-2920-500**

- 適用於各種梭織、針織、牛仔衣物的普洗、酵洗、成衣染色
- 採用PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作，可記憶20組洗衣程式，每組程式可設置30個步驟
- 採用三級皮帶傳動，增加轉動扭矩
- 採用循環運水配合過濾系統，提高成衣染色效果
- 採用自動洗衣時間及到溫計時與即時計時方式選擇
- 採用蒸汽直接加和外置式間接加溫系統(高溫高壓)
- 採用智能溫度模塊配合觸摸屏控制，溫度控制更精確
- 採用水位自動控制和氣動開關門裝置
- 採用氣動剎車裝置，停機後內門對外門自動控制
- 採用無段變速的變頻器，速度可調(8~36RPM)
- 備2個氣動入水和1個氣動排水以及氣動入蒸汽
- 內外膽採用SUS 304不鏽鋼，內膽孔徑Ø8mm

**選購件:**

NS-2291 藥水配量缸

O-I-70-03 入水流量計系統-Ø3"

- Suitable for garment wash, enzyme wash and dyeing of garments made of various kinds of fabrics such as woven, knitted & denim
- Adopt PLC and user friendly touch screen; can memorize 20 groups of programs, up to 30 steps per program
- 3-stage belt drive to increase torque
- Adopting circulating water system combined with a filtration system to improve dyeing effect of garments
- Options of automatic washing timing, up-to-temperature timing and immediate timing
- Combination of direct steam heating and external indirect heating system (high temperature and high pressure)
- Intelligent temperature module in conjunction with touch screen provides accurate temperature control
- Adopting automatic water level control and pneumatic door opening and closing device
- Pneumatic braking device, inner door could align with outer door automatically after machine shutdown
- Inverter for stepless speed control with range:8-36RPM
- 2 pneumatic water inlet systems and 1 pneumatic water drainage and steam intake systems
- SUS 304 Stainless steel inner & outer drums, inner drum bore size Ø8mm

**Optional Accessories :**

NS-2291 chemical dosing tank


O-I-70-03 Water inlet flow meter system-Ø3"




外置式間接加溫系統(高溫高壓)  
External Indirect Heating System  
(high temperature and high pressure)



循環運水配合過濾系統  
Circulating Water System Combined With  
Filtration System

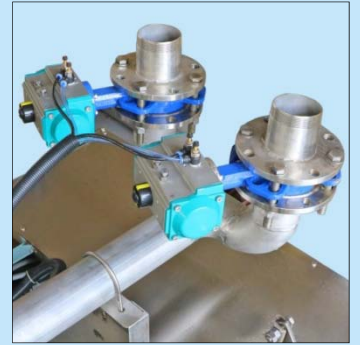

電控氣動入水系統  
Electric Controlled Pneumatic  
Water Inlet System

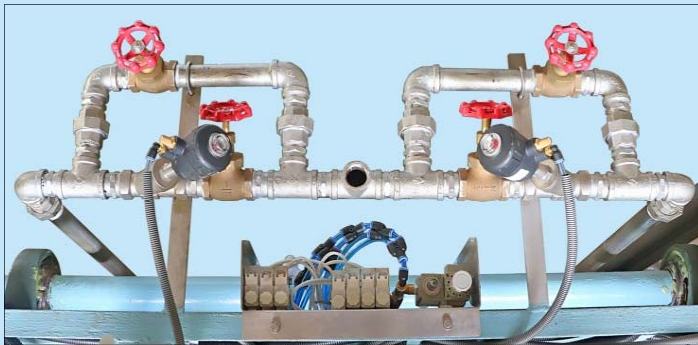

蒸汽(直接/間接加溫)氣動閥總成  
Steam (Direct/Indirect Heating) Pneumatic Valve Assy




速度控制器系統  
Speed Control System



三級皮帶傳動  
3-Stage Belt Drive

**選購件：**  
**Optional Accessories :**

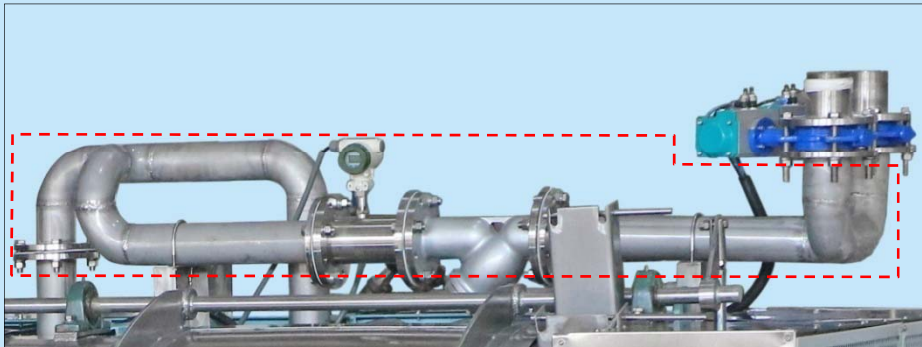

O-I-70-03  
入水流量計系統-Ø3"  
Water inlet flow meter system - Ø3"



NS-2291  
藥水配量缸  
Chemical Dosing Tank

型號 Model	容量(LBS) Capacity	電源 Power Supply	總功率 (kW) Total Power	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	耗蒸汽量(kg/h) Steam Consumption	入水口(inch) Water Inlet	出水口(inch) Water Outlet	水容量(L) Water Capacity	洗衣速度 (RPM) Washing Speed	機器尺寸(mm) Machine Size
NS-2920-500	500	3PH/380V/50Hz	13.2	Ø1220x2260x4	Ø1370x2440x2	200	Ø3"x2	Ø8"x1	1735	8~36	3240x1950x2030
NS-2920-650	650			Ø1370x2260x4	Ø1500x2440x2	260			2244		3240x2100x2200



**藝誠(余氏)發展有限公司**  
**Ngai Shing Development Limited**

香港九龍長沙灣永康街52號地下  
G/F., 52 Wing Hong St.,  
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com  
Fax: (852) 2785 3149 Http://www.ngaishing.com