


NS-9502

自動轉頭側縫壓平機

Automatic Rotation Side Seam Press

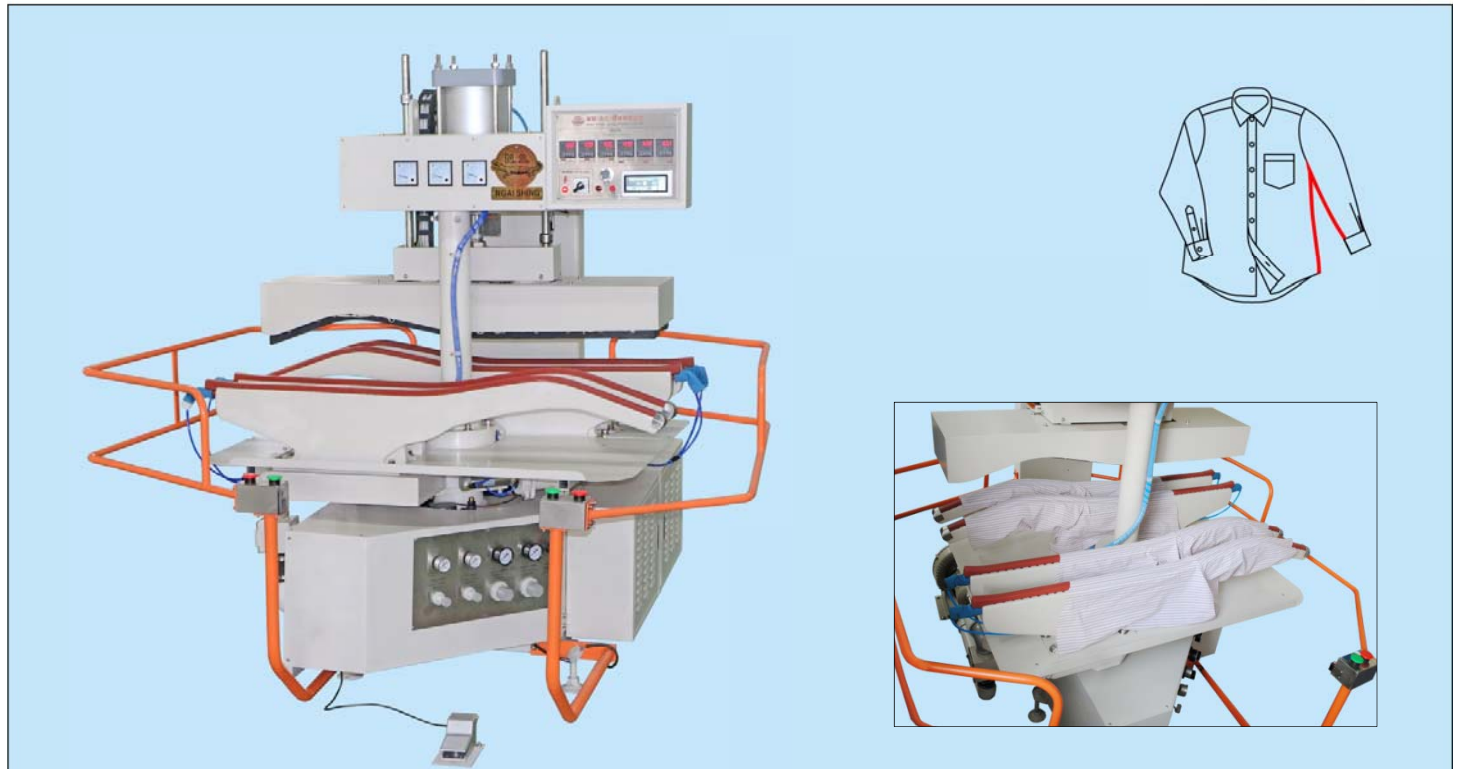

- 適用於襯衫側縫粘合壓熨
- 採用PLC可編程控制器控制及人性化觸摸顯示屏操作
- 垂直加壓方式，壓力分佈均勻，壓熨更平整
- 輕壓、重壓兩種壓熨方式供選擇設定，可滿足不同面料需求
- 上模加熱採用六個獨立數字式溫度控制器控制，溫度控制更精確
- 自動旋轉式雙下模設計，操作方便、工作效率高
- 單發熱上模配合雙下模交替操作，電能利用率高
- 下模配有氣袋和硅膠條，可消除模與襯衫側縫形狀間的偏差，以達到完美壓熨效果
- 備有獨立真空抽濕泵，有助衣物定位、冷卻，定型效果佳

選購件：

O-J-01-3 吹風冷卻系統(壓縮空氣)
各種側縫模

- Suitable for shirt side seam fusing and pressing
- Adopt PLC and user friendly touch screen for operation
- Vertical pressing mode provides uniform pressure distribution and smooth effect
- Two pressing modes, i.e. light press and heavy press, are available for selection to cater for different fabrics
- With six independent digital thermostats for more accurate temperature control of upper mould
- Dual automatic rotation lower moulds enables easy operation and high efficiency
- Single heating upper mould works alternatively with two lower moulds, high electric energy utilization rate
- Lower mould is equipped with air bag and rubber strips that will completely offset the shape difference between the mould and side seam to achieve perfect pressing effect
- With independent vacuum pump to facilitate garment fixing, cooling and shaping

Option:

O-J-01-3 Compressed air blowing cool down system
Various side seam moulds

型號 Model	電源 Power Supply	總功率(kW) Total Power	發熱線功率 (kW) Heater Power	真空泵功率(kW) Vacuum Pump Power	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	平均粘合壓力(kgf/cm ²) Average Fusing Pressure	淨重(kg) Net Weight	機身尺寸(mm) Machine Size
NS-9502	3PH/380V/50Hz	5.6	4	1.5	5	180	2.5	948	1750x1870x1980



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下

G/F., 52 Wing Hong St.,


Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078

E-MAIL: info@ngaishing.com


Fax: (852) 2785 3149

Http://www.ngaishing.com

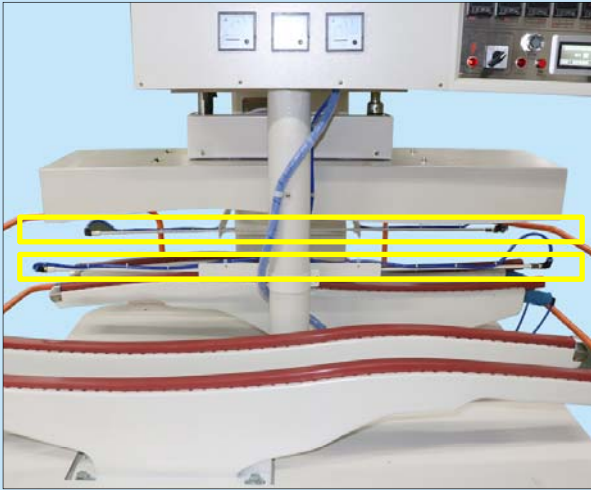

選購件: O-J-01-3 吹風冷卻系統(壓縮空氣)

Option: O-J-01-3 Compressed air blowing cool down system

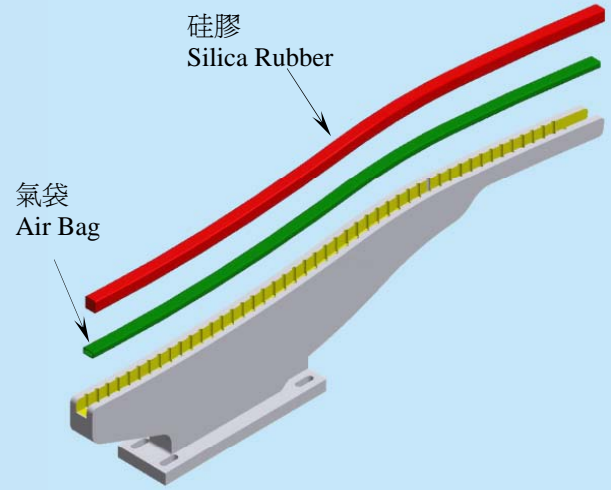

特別設計下模，可消除模與襯衫側縫形狀間的偏差
 Special design for the lower mould to offset shape difference between the mould and sleeve side

選購件 (每款模包括一對上模和兩對下模)

Options (Each type consists of one pair of upper moulds and two pairs of lower moulds)

