



# NS-93-1

## 點樸機

### Spot Welding Machine

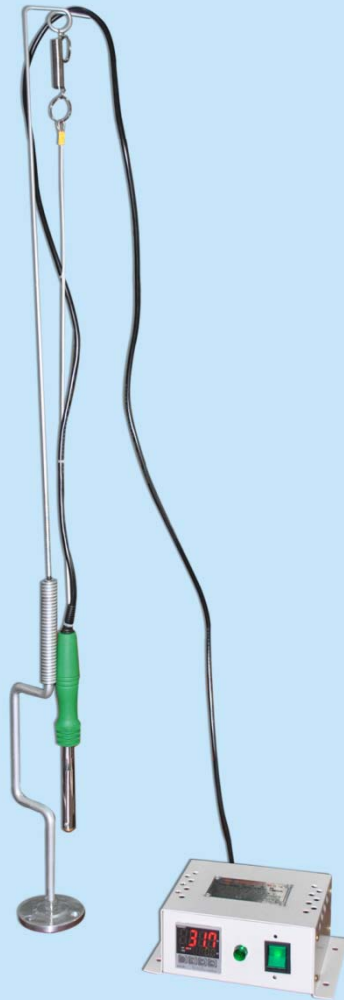

#### 標準加熱咀 Standard Nozzle

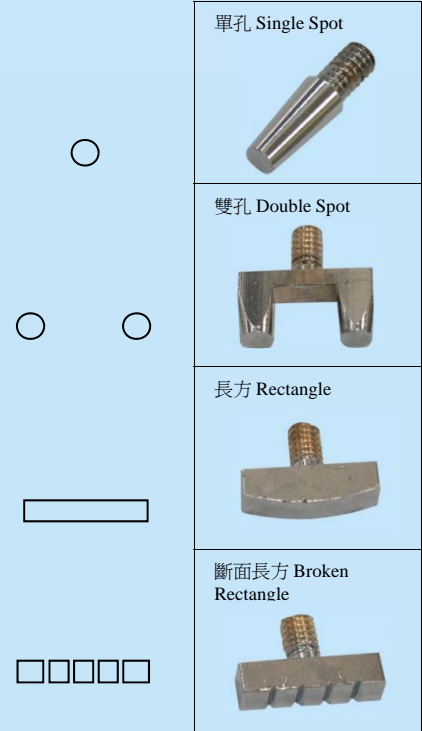

將樸布及領布預先定位，避免在粘合過程中移位  
Pre-fix interlining with fabric for avoiding shift during fusing

- 適用於樸布及領布預先粘合定位
- 採用電加熱，配合數字式溫度控制器，溫度控制更準確
- 最高溫度300℃
- 備多種不同加熱咀
- 彈弓吊架，方便操作
- Pre-fix interlining with collar fabric
- Electric heat with digital thermostat, features more accurate temperature control
- Max. temperature: 300℃
- With different heating nozzles
- String hanger facilitates operation

型號 Model	電源 Power Supply	總功率(kW) Total Power	最高設計溫度 Max. Design Temp. (°C)	淨重(kg) Net Weight	毛重(kg) Gross Weight	支架高度 (mm) Support Height
NS-93-1	1PH/220V/50Hz	0.08	300	1.9	2.6	960



**藝誠(余氏)發展有限公司**  
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下  
G/F., 52 Wing Hong St.,  
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852)2741 9981, 2742 0078 E-MAIL: info@ngaishing.com  
Fax: (852)2785 3149 Http://www.ngaishing.com