

NS-2700-70 / 100 / 200

NS-2701-70 / 100 / 200

工業洗衣機 Industrial Washing Machine



NS-2700-200

- 適用於各種梭織、針織、牛仔衣物的普洗、酵洗、套色
- 採用三級皮帶傳動，增加轉動扭矩
- 內膽可定時正、逆轉動
- 配備氣動剎車系統，方便停機時對門的位置(NS-2700/2701-200)
- 自動洗衣時間及到溫計時與即時計時方式選擇
- 配備數字式溫度控制器控制，溫度控制更精確
- 內外膽採用SUS 304不鏽鋼
- NS-2700/2701-70/100內膽孔徑Ø6mm
- NS-2700/2701-200內膽孔徑Ø8mm
- **NS-2700** 系列採用蒸汽直接加溫
- **NS-2701** 系列採用蒸汽直接加溫與間接加溫相結合


選購件：

- 蒸汽氣動閥總成
- 疏水閥總成(NS-2701系列)
- 手控氣動入水系統
- 手動改氣動排水控制系統
- 速度控制系統
- 手動入藥水盒系統


- Suitable for garment wash, enzyme wash and tinting of garments of various fabrics such as woven, knit fabrics, denim, etc.
- 3-stage belt drive to increase torque
- Inner drum can rotate forward and backward rotation according to preset time
- Pneumatic braking system for convenient door position alignment while machine stopping (NS-2700/2701-200)
- Automatic washing time control; up-to-temperature timing and immediate timing available for selection
- Equipped with digital temperature controller for accurate temperature control
- SUS 304 Stainless steel inner & outer drums
- NS-2700/2701-70/100 Inner drum bore size Ø6mm
- NS-2700/2701-200 Inner drum bore size Ø8mm
- **NS-2700** series adopts direct steam heating
- **NS-2701** series combines direct steam heating and indirect steam heating

Optional Accessories:

- Steam Pneumatic Valve Assy
- Steam Trap Set (NS-2701 series)
- Manual Controlled Pneumatic Water Feeding System
- Manual to Pneumatic Water Draining Control System
- Speed Control System
- Manual Chemical Feeding System

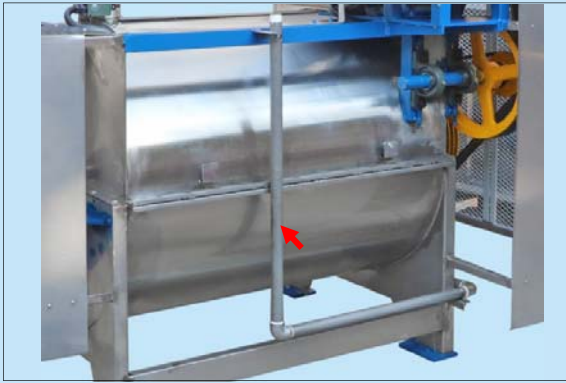

蒸汽直接加溫裝置(NS-2700-70~100)
Direct steam heating device (NS-2700-70~100)

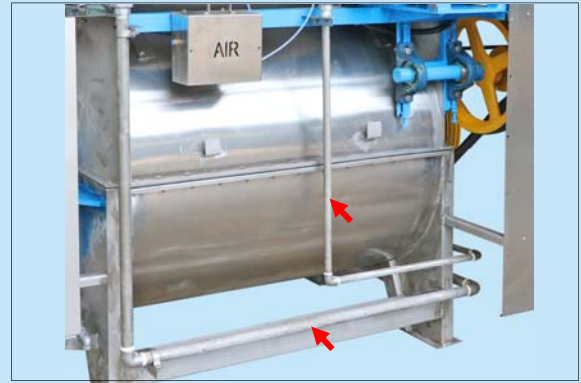

蒸汽直接加溫與間接加溫裝置(NS-2701-70~100)
Direct and indirect steam heating device(NS-2701-70~100)



蒸汽直接加溫裝置(NS-2700-200)
Direct steam heating device (NS-2700-200)



蒸汽直接加溫與間接加溫裝置(NS-2701-200)
Direct and indirect steam heating device(NS-2701-200)




三級皮帶傳動
3-stage pulley belt drive



手動排水裝置
Manual water discharge device



蒸汽間接加溫內部管道圖(NS-2701系列)
Indirect heating device (NS-2701 series)

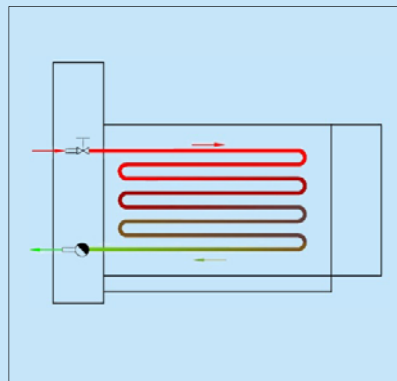


蒸汽間接加溫示意圖(NS-2701系列)
Indirect steam heating diagram
(NS-2701 series)



氣動碟剎裝置(NS-2700/2701-200)
Pneumatic Disc Brake Device
(NS-2700/2701-200)

選購件(Optional Accessories):

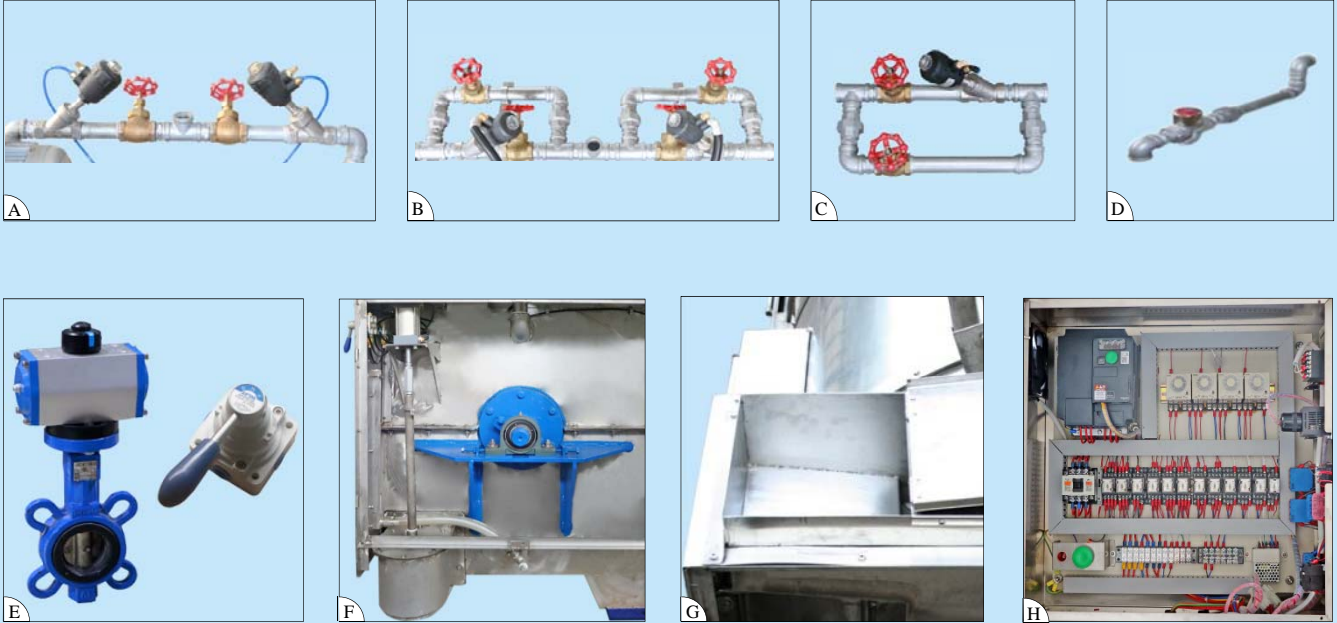

序號 Serial No.	編號 Part No.	中英文名稱Description	適用於Suitable for
A	O-I-01-5	蒸汽(直接/間接加溫)氣動閥總成-Ø1" Steam (Direct/Indirect Heating) Pneumatic Valve Assy-Ø1"	NS-2701-70/100
B	O-I-01-2	蒸汽(直接/間接加溫)氣動閥總成-Ø1" Steam (Direct/Indirect Heating) Pneumatic Valve Assy-Ø1"	NS-2701-200
C	O-I-01-4	蒸汽氣動閥總成-Ø1" Steam Pneumatic Valve Assy-Ø1"	NS-2700-70/100/200
D	O-I-03-3	疏水閥總成-Ø1/2" Steam Trap Set-Ø1/2"	NS-2701-70/100
	O-I-03-4	疏水閥總成-Ø1" Steam Trap Set-Ø1"	NS-2701-200
E	O-I-04-4	手控氣動入水系統-Ø1 1/2" Manual Controlled Pneumatic Water Feeding System-Ø1 1/2"	NS-2700-70/100, NS-2701-70/100
	O-I-04-2	手控氣動入水系統-Ø2" Manual Controlled Pneumatic Water Feeding System-Ø2"	NS-2700-200, NS-2701-200
F	O-I-07-2	手動改氣動排水控制系統-Ø6" Manual to Pneumatic Water Draining Control System-Ø6"	NS-2700-70/100/200, NS-2701-70/100/200
G	O-I-53-01	手動入藥水盒系統Manual Chemical Feeding System	NS-2700-70/100, NS-2701-70/100
	O-I-53-02	手動入藥水盒系統Manual Chemical Feeding System	NS-2700-200, NS-2701-200
H	O-I-10-1	速度控制器系統 1.5kW Speed Control System 1.5kW	NS-2700-70, NS-2701-70
	O-I-10-2	速度控制器系統 2.2kW Speed Control System 2.2kW	NS-2700-100, NS-2701-100
	O-I-10-9	速度控制器系統 4kW Speed Control System 4kW	NS-2700-200, NS-2701-200

型號 Model	容量 (LBS) Capacity	電源 Power Supply	馬達 (kW) Motor	耗蒸汽量(kg/hr) Steam Consumption	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	水容量(L) Water Capacity	入水口(inch) Water Inlet	出水口(inch) Water Outlet	洗衣速度 (RPM) Washing Speed	機身尺寸(mm) Machine Size
NS-2700-70	70	3PH/380V/50Hz	1.5	45	Ø800x700x2	Ø940x840x1.5	291	Ø2" x1pc	Ø6" x1pc	30-33	1450x1380x1700
NS-2701-70							301				
NS-2700-100	100		2.2	60	Ø800x990x2	Ø940x1100x1.5	385				
NS-2701-100							398				
NS-2700-200	200		4	100	Ø1100x1090x3	Ø1250x1270x1.5	706				
NS-2701-200							744				



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
 G/F., 52 Wing Hong St.,
 Cheung Sha Wan, Kln., Hong Kong.

Tel: (852)2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
 Fax: (852)2785 3149 Http://www.ngaishing.com