

NS-8243
自動領袖壓平機
Automatic Collar and Cuff Press



NS-8243MP



NS-8243FP/NS-8243MP
 操作 Operation



NS-8243FP-L/NS-8243MP-L
 操作 Operation

- 適用於於襯衫領、袖壓熨
- 採用PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作
- 上模採用多條發熱線分組加溫，各區域溫度可由相應獨立數字式溫度控制器控制，溫度控制更精確
- 操作靈活，動作敏捷，生產效率高
- 下模可抽濕(需另購真空抽濕泵)，有助衣物定位，冷卻、定型效果佳

選購件：

- NS-3400 系列真空抽濕泵
- O-F-08-1 獨立真空泵系統

- Suitable for pressing collar and cuff of men's and ladies' shirts
- Adopt PLC and user friendly touch screen for operation
- Each zone of upper mould is heated separately, and the temperature of each zone is under the control of independent thermostat. This design provides convenience for temperature optimization
- Flexible operation, swift action and high efficiency
- Lower mould can vacuum(need to purchase a vacuum pump additionally) to facilitate garment fixing, cooling and shaping

Options:


- NS-3400 series vacuum pump
- O-F-08-1 independent vacuum pump




PLC + 觸摸屏 PLC + Touch screen




優質電器元件 Quality electric elements




NS-8243FP
下模尺寸圖 Lower mould dimension diagram





NS-8243MP
下模尺寸圖 Lower mould dimension diagram



NS-8243FP-L
下模尺寸圖 Lower mould dimension diagram



NS-8243MP-L
下模尺寸圖 Lower mould dimension diagram

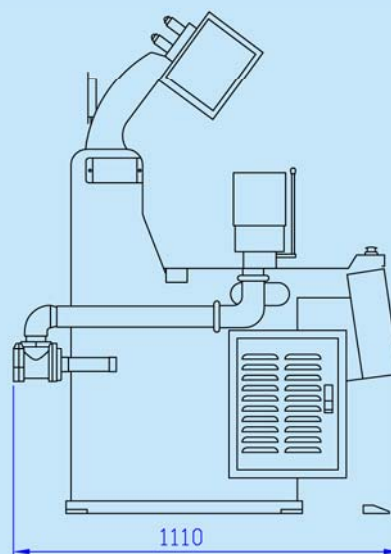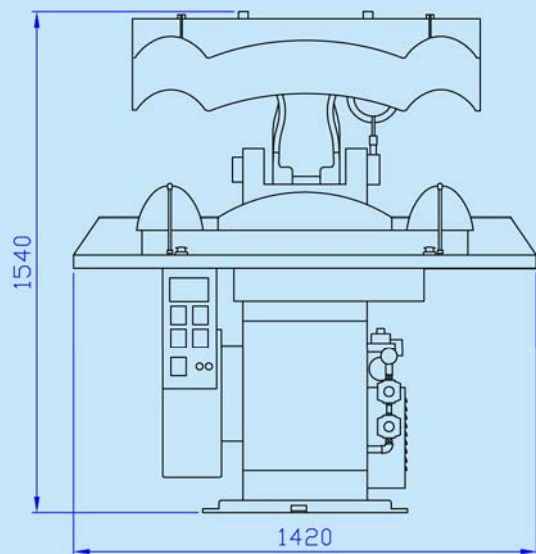

機身外形圖 Machine Size Diagram (mm)

型號 Model	適用範圍 Suitable For	電源 Power Supply	總功率(kW) Total Power	工作檯平均壓力(kgf/cm ²) Average Working Platform Pressure	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	設計溫度(°C) Design Temperature	機身尺寸(mm) Machine Size
NS-8243FP	女裝	3PH/380V/50Hz	4.9	3	5	150	200	1420x1110x1540
NS-8243FP-L	Ladies' shirt		7.5					
NS-8243MP	男裝		4.9					
NS-8243MP-L	Men's shirt		7.3					



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F, 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com