




## Advantage

**P**owerful Operation  
**O**utstanding Performance

### Product Introduction

- Operation in confined space. 2636mm aisle width is enough for its working.
- Supper Low and non-slip step makes operation more convenient and safe.
- Abundant storage space such as cup holder and file folder,makes the forklift more hunmanized.
- Smart Instrument shows all the running status of forklift like the driving wheel position, battery level,error code , etc
- Thrust replacement for battery makes it easy to keep maintenance.
- Multi-valve operation with hydraulic level can achieve accurate control.
- Speed-limiting function for steering,stops the truck turning over when turning.
- Double AC Curtis controllers ensure reliable performance.
- EPS with small -diameter steering wheel, easy to operate.
- Floating rear suspension wheel structure makes it suitable for working in different floor.
- Additional fork camera make it safe and efficient to loading or unloading goods.
- LED headlight provides more strong light source.

### Technical Specification

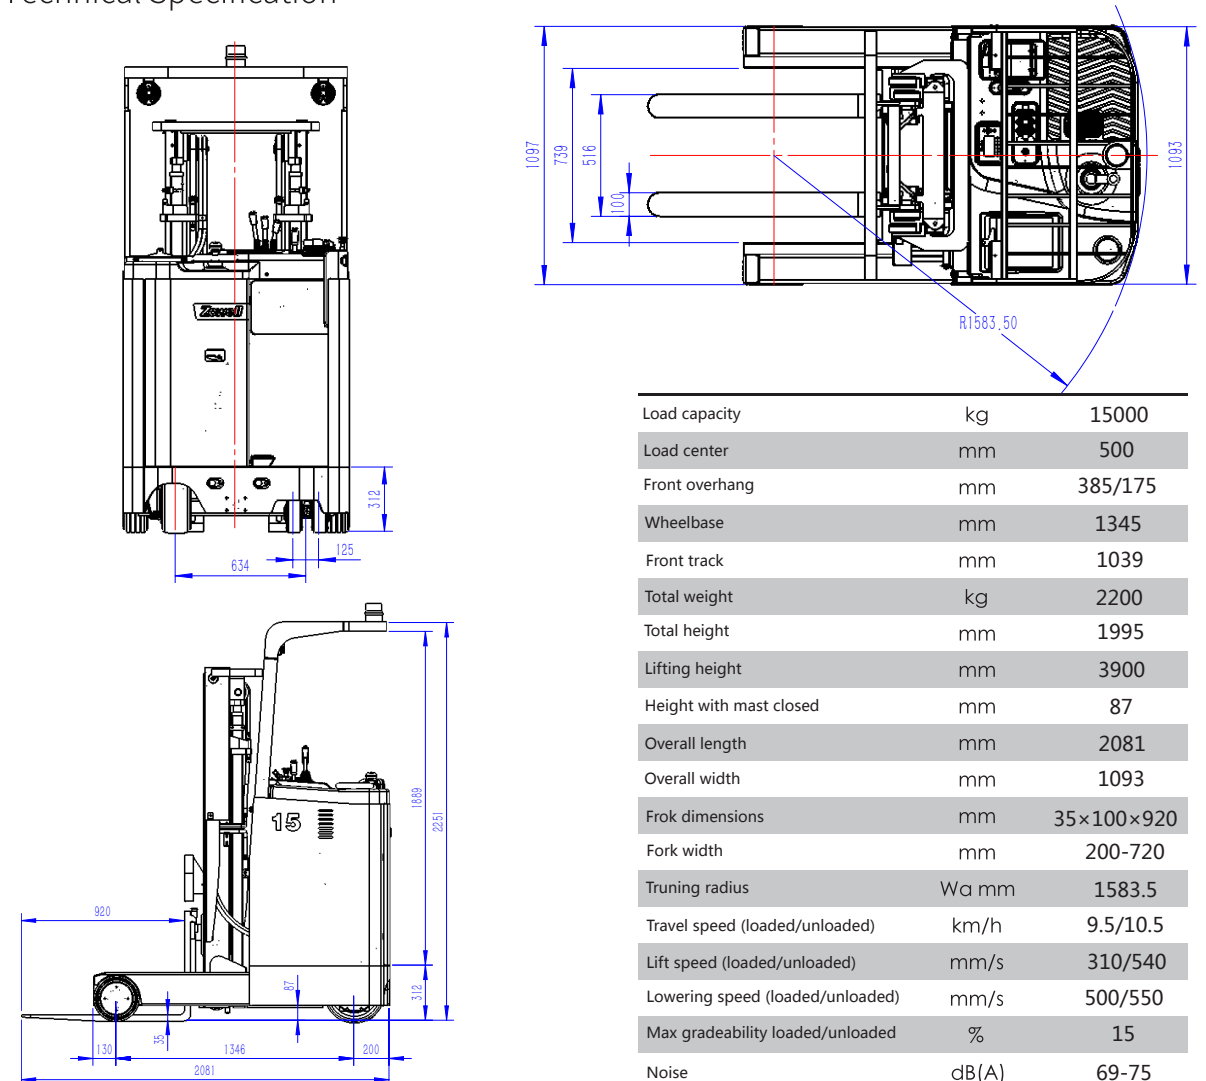

Load capacity	kg	15000
Load center	mm	500
Front overhang	mm	385/175
Wheelbase	mm	1345
Front track	mm	1039
Total weight	kg	2200
Total height	mm	1995
Lifting height	mm	3900
Height with mast closed	mm	87
Overall length	mm	2081
Overall width	mm	1093
Frok dimensions	mm	35×100×920
Fork width	mm	200-720
Truning radius	Wa mm	1583.5
Travel speed (loaded/unloaded)	km/h	9.5/10.5
Lift speed (loaded/unloaded)	mm/s	310/540
Lowering speed (loaded/unloaded)	mm/s	500/550
Max gradeability loaded/unloaded	%	15
Noise	dB(A)	69-75

