



产品规格书

SPECIFICATION FOR APPROVAL

Power Adapter/电源适配器

客户:

CUSTOMER NO. : _____

产品描述:

DESCRIPTION: Input:100~240VAC 50/60Hz Output:9.0-48.0VDC 90W

机种型号:

OUR MODEL NO. : LXCP96/LXCP96(II)系列规格书

文件编号:

DOCUMENT NO. : LXC/RD-Spec. -309

日期:

DATE: 2022-09-09

客户编号

CUSTOMER NO. : _____

版本:

VERSION: V00

产品颜色:

SAMPLE COLOR: Black White

深圳市龙星辰电源有限公司

Shenzhen Longxc Power Supply Co., Ltd.

地址: 深圳市宝安区石岩街道应人石文韬科技园 B 栋 4-5 层

Address: 4-5/F, B Building, Yingrenshi Community, Wentao Science

Park, Shiyan Town, Bao'an, Shenzhen, China

Tel: [0755-27784192](tel:0755-27784192) Fax: [0755-29991201](tel:0755-29991201)

核准/APPROVED BY	审核/CHECKED BY	编制/PREPARED BY



深圳市龙星辰电源有限公司
Shenzhen Longxc Power Supply Co.,LTD

型号/Model: LXCP96/LXCP96(II)系列

客户/Customer:

日期/Date: 2022.09.09

文件编号/ Document No.: LXC/RD-Spec. -309

版本目录/Rev. List

版本/Rev.	日期/Date	描述/ Description	制订/Design
V00	2022-09-09	新版本/New Rev.	覃林英

目录/TABLE OF CONTENT

1. 描述/ DESCRIPTION	3
2. 型号命名规则/MODEL NAME RULE	3
3. 输入特性/INPUT CHARACTERISTICS	4
4. 输出特性/OUTPUT CHARACTERISTICS	4
5. 保护功能/PROTECTION FUNCTION	6
6. 环境要求/ENVIRONMENTAL	6
7. MTBF	8
8. EMC 特性/ELECTROMAGNETIC COMPATIBILITY	8
9. 安全要求/SAFETY	9
10. 结构参数/MECHANICAL	10
11. 线材/DC CABIE DIAMETER	10
12. 铭牌/ NAMEPLATE	11
13. 包装说明/PACKING	12



1. 描述/ DESCRIPTION

本规格书适应于 LXCP96/LXCP96(II) 系列型号的开关电源。

The purpose of the document is to specify the functional requirements of a LXCP96/LXCP96(II) series switching power supply.

2. 型号命名规则/MODEL NAME RULE

LXCP96-aaa/LXCP96-aaaG/LXCP96(II)-aaa:

-LXCP= Longxc 医疗适配器/-LXCP= Longxc medical adapter

-96/96(II)=系列名称/-96/96(II)=Name of the series

-aaa="090"- "480" 为输出电压。"090" 是 9.0V, "120" 是 12.0V, "135" 是 13.5V, "142" 是 14.2V, "150" 是 15.0V, "168" 是 16.8V, "180" 是 18.0V, "190" 是 19.0V, "200" 是 20.0V, "220" 是 22.0V, "240" 是 24.0V, "260" 是 26.0V, "280" 是 28.0V, "300" 是 30.0V, "320" 是 32.0V, "340" 是 34.0V, "360" 是 36.0V, "380" 是 38.0V, "400" 是 40.0V, "420" 是 42.0V, "440" 是 44.0V, "460" 是 46.0V, "480" 是 48.0V。

-aaa="090"- "480" stands for the output voltage. "090" means 9.0V, "120" means 12.0V, "135" means 13.5V, "142" means 14.2V, "150" means 15.0V, "168" means 16.8V, "180" means 18.0V, "190" means 19.0V, "200" means 20.0V, "220" means 22.0V, "240" means 24.0V, "260" means 26.0V, "280" means 28.0V, "300" means 30.0V, "320" means 32.0V, "340" means 34.0V, "360" means 36.0V, "380" means 38.0V, "400" means 40.0V, "420" means 42.0V, "440" means 44.0V, "460" means 46.0V, "480" means 48.0V.

-G: 尾缀 "G" 只体现在一类电源, 带尾缀 "G" 表示该电源负极接地, 而没有这个 "G" 字则意味着负极不接地的常规型号。

-G: The tail "G" is only used in class I power supply. The tail "G" indicates that the power supply is negatively grounded, while the absence of this "G" means that the negative is not grounded in the conventional model.

Details refer to the below table:/ 详情见下表:

型号/Model number	型号/Model number	型号/Model number	输出电流范围/Output current range (A)
LXCP96-090	LXCP96-090G	LXCP96(II)-090	1.00-7.60
LXCP96-120	LXCP96-120G	LXCP96(II)-120	1.00-7.60
LXCP96-135	LXCP96-135G	LXCP96(II)-135	1.00-6.66
LXCP96-142	LXCP96-142G	LXCP96(II)-142	1.00-6.33
LXCP96-150	LXCP96-150G	LXCP96(II)-150	1.00-6.00
LXCP96-168	LXCP96-168G	LXCP96(II)-168	1.00-5.35
LXCP96-180	LXCP96-180G	LXCP96(II)-180	1.00-5.00
LXCP96-190	LXCP96-190G	LXCP96(II)-190	1.00-4.73
LXCP96-200	LXCP96-200G	LXCP96(II)-200	1.00-4.50
LXCP96-220	LXCP96-220G	LXCP96(II)-220	1.00-4.10
LXCP96-240	LXCP96-240G	LXCP96(II)-240	1.00-3.75
LXCP96-260	LXCP96-260G	LXCP96(II)-260	1.00-3.46
LXCP96-280	LXCP96-280G	LXCP96(II)-280	1.00-3.21
LXCP96-300	LXCP96-300G	LXCP96(II)-300	1.00-3.00
LXCP96-320	LXCP96-320G	LXCP96(II)-320	1.00-2.81
LXCP96-340	LXCP96-340G	LXCP96(II)-340	1.00-2.64
LXCP96-360	LXCP96-360G	LXCP96(II)-360	1.00-2.50



深圳市龙星辰电源有限公司
Shenzhen Longxc Power Supply Co.,LTD

型号/Model: LXCP96/LXCP96(II)系列

客户/Customer:

日期/Date: 2022.09.09

文件编号/ Document No.: LXC/RD-Spec. -309

LXCP96-380	LXCP96-380G	LXCP96(II)-380	1.00-2.36
LXCP96-400	LXCP96-400G	LXCP96(II)-400	1.00-2.25
LXCP96-420	LXCP96-420G	LXCP96(II)-420	1.00-2.14
LXCP96-440	LXCP96-440G	LXCP96(II)-440	1.00-2.04
LXCP96-460	LXCP96-460G	LXCP96(II)-460	1.00-1.95
LXCP96-480	LXCP96-480G	LXCP96(II)-480	1.00-1.90

备注/Remark:

-LXCP96-aaa/LXCP96-aaaG: I类产品, 在264Vac、60Hz条件下, 漏电流小于300uA。

-LXCP96-aaa/LXCP96-aaaG: For class I product, the earth leakage current less than 300uA at 264Vac, 60Hz.

-LXCP96(II)-aaa: II类产品, 在264Vac、60Hz条件下, 漏电流小于100uA。

-LXCP96(II)-aaa: For class II product, the earth leakage current less than 100uA at 264Vac, 60Hz.

3. 输入特性/INPUT CHARACTERISTICS

3.1 输入电压/Input Voltage:

额定电压/Nominal voltage:100~240Vac

调整范围/Variation range:90~264Vac

3.2 输入频率/Input Frequency:

额定频率/ Nominal frequency: 50/60Hz

调整频率/Variation frequency:47~63Hz

3.3 输入电流/Input Current:

当输入交流电压为额定值的下限电压负载满载时,最大输入交流电流2.0A。

2.0Amps max at any input voltage and rated DC output and rated load.

3.4 浪涌电流/Inrush Current:

当输出为额定负载, 环境温度为25°C, 输入264Vac冷态起机时的最大浪涌电流小于120A。

120Amps max. Cold start at 264Vac input, with rated load and 25°C ambient.

4. 输出特性/OUTPUT CHARACTERISTICS

4.1 输出功率/Power Output:

型号/Model name			输出电压/ Output voltage (V)	输出范围 /Output range (V)	额定负载/ Rated load (A)	输出功率 /Output power (W)
LXCP96-090	LXCP96-090G	LXCP96(II)-090	9.0	8.50-9.50	7.60	68.4
LXCP96-120	LXCP96-120G	LXCP96(II)-120	12.0	11.5-12.5	7.60	91.2
LXCP96-135	LXCP96-135G	LXCP96(II)-135	13.5	13.0-14.0	6.66	90.0
LXCP96-142	LXCP96-142G	LXCP96(II)-142	14.2	13.7-14.7	6.33	90.0
LXCP96-150	LXCP96-150G	LXCP96(II)-150	15.0	14.5-15.5	6.00	90.0



深圳市龙星辰电源有限公司
Shenzhen Longxc Power Supply Co.,LTD

型号/Model: LXCP96/LXCP96(II)系列

客户/Customer:

日期/Date: 2022.09.09

文件编号/ Document No.: LXC/RD-Spec. -309

LXCP96-168	LXCP96-168G	LXCP96(II)-168	16.8	16.3-17.4	5.35	90.0
LXCP96-180	LXCP96-180G	LXCP96(II)-180	18.0	17.5-18.5	5.00	90.0
LXCP96-190	LXCP96-190G	LXCP96(II)-190	19.0	18.5-19.5	4.73	90.0
LXCP96-200	LXCP96-200G	LXCP96(II)-200	20.0	19.5-20.5	4.50	90.0
LXCP96-220	LXCP96-220G	LXCP96(II)-220	22.0	21.5-22.5	4.10	90.0
LXCP96-240	LXCP96-240G	LXCP96(II)-240	24.0	23.5-24.5	3.75	90.0
LXCP96-260	LXCP96-260G	LXCP96(II)-260	26.0	25.0-26.0	3.46	90.0
LXCP96-280	LXCP96-280G	LXCP96(II)-280	28.0	27.0-29.0	3.21	90.0
LXCP96-300	LXCP96-300G	LXCP96(II)-300	30.0	29.0-31.0	3.00	90.0
LXCP96-320	LXCP96-320G	LXCP96(II)-320	32.0	31.0-33.0	2.81	90.0
LXCP96-340	LXCP96-340G	LXCP96(II)-340	34.0	33.0-35.0	2.64	90.0
LXCP96-360	LXCP96-360G	LXCP96(II)-360	36.0	35.0-37.0	2.50	90.0
LXCP96-380	LXCP96-380G	LXCP96(II)-380	38.0	37.0-39.0	2.36	90.0
LXCP96-400	LXCP96-400G	LXCP96(II)-400	40.0	39.0-41.0	2.25	90.0
LXCP96-420	LXCP96-420G	LXCP96(II)-420	42.0	41.0-43.0	2.14	90.0
LXCP96-440	LXCP96-440G	LXCP96(II)-440	44.0	43.0-45.0	2.04	90.0
LXCP96-460	LXCP96-460G	LXCP96(II)-460	46.0	45.0-47.0	1.95	90.0
LXCP96-480	LXCP96-480G	LXCP96(II)-480	48.0	47.0-49.0	1.90	91.2
线性调整率/Line regulation			±2%			
负载调整/Load regulation			±5%			

4.2 纹波和噪音 Ripple And Noise:

测试条件:在额定电压及额定负载条件下,使用示波器带宽为 20MHz 连接到充电器的输出端,同时输出端并联一个 10uF 的电解电容和一个 0.1uF 的瓷片电容,最大纹波/最大噪音小于 200mVp-p.

Test condition:Under nominal voltage and rated load, the ripple and noise are as follows when measure with max. bandwidth of 20MHz and Parallel 10uF/0.1uF, crossed connected at testing point. Ripple and noise(max.) less than 200mVp-p.

4.3 启动延迟时间/Turn On Delay Time:

最大启动时间为 3s,测试条件输入 220Vac 和输出额定负载时.

3 second Max.at 220Vac input and output rated load.

4.4 上升时间/Rise Time:

最大时间为 50ms,测试条件输入 115Vac 和输出额定负载时.

50ms max.at 115Vac input and output rated load.

4.5 保持时间/Hold Up Time:

当输入 115Vac 和输出额定负载时,最小保持时间为 10ms.



深圳市龙星辰电源有限公司
Shenzhen Longxc Power Supply Co.,LTD

型号/Model: LXCP96/LXCP96(II)系列

客户/Customer:

日期/Date: 2022.09.09

文件编号/ Document No.: LXC/RD-Spec. -309

10ms min. at 115Vac input and output rated Load.

4.6 效率/Efficiency:

最小 85%, 测试条件 115/230Vac 输入电压, 额定输出负载。

85% min, at 115/230Vac input voltage, rated load.

5. 保护功能/PROTECTION FUNCTION

5.1 短路测试/Short Circuit Test:

该电源供给器在短路解除时能恢复正常工作。

The power supply will be auto recovering when short circuit faults removed.

5.2 过流保护/Over Current Protection:

当输出电流达到额定电流的 110%~200%时, 电源将保护, 过流故障排除后, 电源将自动恢复正常工作。

When the output current reaches 110%~200% of the rated current, the power supply will be protected. After the over current fault is removed, the power supply will be automatically recovering.

5.3 过压保护/Over Voltage Protection:

当输出电压触发到过压保护点时电源将保护, 故障排除后能恢复正常工作. 电源过压保护功能在 PWM 芯片内部建立。

The power supply shall be stop when output voltage reaches its over-voltage condition trigger point. When the fault condition is removed the power supply shall be self-recovering. The over voltage protection function is built-in the PWM IC of the power supply.

5.4 过温度保持/ Over Temperature Protection:

当集成电路温度超过其触发点时, 电源进入停止模式, 当集成电路温度低于规定值时, 电源自动恢复。

The power supply shall go into stop mode when the IC's temperature is over its trigger point and when IC temperature is lower than regulation value, the power supply shall be self-recovering.

6. 环境要求/ENVIRONMENTAL

6.1 工作温度/Operating Temperature:

-10°C~40°C, 满载, 正常工作。

-10°C to 40°C, rated load, normal operation.

6.2 储藏温度/Storage Temperature:

-20°C to 80°C

带外壳/With package

6.3 储藏湿度/ Storage Humidity:

10%~90%

带外壳/With package

6.4 工作湿度/Relative Humidity:

5% (0°C) ~90% (40°C), 72 小时, 满载, 正常工作。

型号/Model: LXCP96/LXCP96(II)系列



深圳市龙星辰电源有限公司
Shenzhen Longxc Power Supply Co.,LTD

客户/Customer:

日期/Date: 2022.09.09

文件编号/ Document No.: LXC/RD-Spec. -309

5%(0°C) ~90%(40°C),72Hrs,rated load, normal operating.

6.5 大气压力/ Atmospheric Pressure:

54-106KPa, 正常工作。

54-106KPa, normal.

6.6 海拔高度/ Altitude:

5000 米,超过 5000 米以上,海拔高度每升高 300 米工作温度降低 1°C.

5000m,work temp descend 1°C every 300m over 5000m.

6.7 振动/Vibration:

1. 测试标准: IEC60068-2-6 GB2423. 10

Operating: IEC60068-2-6 GB2423. 10

5~9Hz, A=1.5mm

9~200Hz, 加速度:5m/S²

9~200Hz, acceleration 5m/S²

2. 运输/Transportation:

5-9Hz, A:3.5mm

9~200Hz, 加速度: 5m/S²

9~200Hz, acceleration:5m/S²

200~500Hz, 加速度: 15m/S²

200~500Hz, acceleration:15m/S²

3. 轴向振动/Axial Vibration:

每轴 10 个周期。

Axes, 10 cycles per axis.

在测试过程中不能出现永久性的损坏。

No permanent damage may occur during testing.

在电源开启和关闭后,电源能够恢复到最初条件。

The power supply can be recovery to normal after power off/on.

6.8 跌落试验/Dropping Packed:

插墙式跌落高度为 1 米、桌面式跌落高度为 760mm;

1M for wall mount type and 760mm for desktop type as above described.

测试台面是厚 13mm 的夹木板,离地面高 19~20mm。

The horizontal surface consists of hardwood at least 13mm thick, mounted on two layers of plywood and away from land 19mm ~ 20mm.



深圳市龙星辰电源有限公司
Shenzhen Longxc Power Supply Co.,LTD

型号/Model: LXCP96/LXCP96(II)系列

客户/Customer:

日期/Date: 2022.09.09

文件编号/ Document No.: LXC/RD-Spec.-309

7. MTBF

≥100,000 hours 25°C, 满载, 220Vac.

The power supply shall have a minimum predicted MTBF(MIL-STD-217F) of 100000 hours at normal operation condition and normal use.

8. EMC 特性/ELECTROMAGNETIC COMPATIBILITY

Number /序号	Item/项目	Specifications/标准 (或测试条件)	Class/判定标准	Standards/备注
1	传导干扰(CE)	Class B	/	IEC/EN60601-1-2; YY0505 GB4824; EN55011; FCC Part 18
2	辐射干扰(RE)	Class B	/	IEC/EN60601-1-2; YY0505 GB4824; EN55011; FCC Part 18
3	浪涌(SURGE)	线线 ± 1KV /Line to line ± 1KV	A	IEC/EN60601-1-2; YY0505
		线地 ± 2KV /Line to GND ± 2KV	A	IEC/EN61000-4-5; GB17626.5
4	静电抗扰(ESD)	空气放电 ± 15KV Air discharge ± 15KV	A	IEC/EN60601-1-2; YY0505
		接触放电 ± 8KV /Contact discharge ± 8KV	A	IEC/EN61000-4-2; GB17626.2
5	快速瞬变脉冲群(EFT/B)	± 2KV (Burst frequency = 100KHz)	A	IEC/EN60601-1-2; YY0505 IEC/EN61000-4-4; GB17626.4
6	电压跌落和短时间中断(DIP)	跌落到 0%Ut, 持续时间 5000ms (250 个周期) / Dropped to 0%Ut, last 5000ms(250cycle)	B	IEC/EN60601-1-2; YY0505 IEC/EN61000-4-11; GB17626.11
		跌落到 30%Ut, 持续时间 500ms (25 个周期) / Dropped to 30%Ut, last 500ms(25 cycle)	B	
		跌落到 0%Ut, 持续时间 20ms (1 个周期) / Dropped to 0%Ut, last 20ms(1 cycle)	B	
		跌落到 0%Ut, 持续时间 10ms (0.5 个周期) / Dropped to 0%Ut, last 10ms(0.5 cycle)	A	
7	辐射抗扰(RS)	试验频率: 80MHz~2700MHz; / Test frequency: 80MHz~2700MHz; 场强: 10V/m; /Field intensity: 10V/m; 幅度调制: 80%AM(1KHz) Amplitude modulation: 80%AM(1KHz)	A	IEC/EN60601-1-2; YY0505 IEC/EN61000-4-3; GB17626.3
8	传导抗扰(CS)	试验频率: 0.15MHz~80MHz; / Test frequency: 0.15MHz~80MHz; 场强: 6Vrms; /Field intensity: 6Vrms; 幅度调制: 80%AM(1KHz) / Amplitude modulation: 80%AM(1KHz)	A	IEC/EN60601-1-2; YY0505 IEC/EN61000-4-6; GB17626.6
9	电流谐波(THD)	满足 Class A(配合系统测试)/Class A(in system)	/	IEC/EN60601-1-2; YY0505 IEC/EN61000-3-2; GB17625.1



10	电压波动和闪烁/Voltage fluctuation and flicker	Pst 值不大于 1.0; PIt 值不大于 0.65; 相对稳态电压变化 dc 不超过 3.3%; 最大相对电压变化 Dmax 不超过 4%相对电压变化持续时间>500ms 时≤4%/Pst≤1.0;PIt≤0.65;Relative steady-state voltage variation dc under3.3%;Maximum relative voltage variation (Dmax) under4%	/	IEC/EN60601-1-2; YY0505 IEC/EN61000-3-3; GB17625.2
11	工频磁场 /Power frequency magnetic field	30A/M	A	IEC/EN60601-1-2; YY0505 IEC/EN61000-4-8; GB17626.8

注: / Note:

- 性能判据 A: 试验中 EUT 在规范极限值内性能正常;
 - 性能判据 B: 试验中 EUT 功能或性能暂时降低或丧失, 但能自行恢复;
 - 性能判据 C: 试验中 EUT 功能或性能暂时降低或丧失, 但需操作者干预或系统重调(或复位);
 - 性能判据 D: 试验中 EUT 因装置(或元件)损坏而不可恢复的功能降低或丧失。
- Performance criterion A: Normal performance within limits in this specification.
- Performance criterion B: Temporary loss of some functions or degradation of performance. The recovering performance of which without operator intervention.
- Performance criterion C: Temporary loss of function or degradation of performance .The recovering performance of which requires operator intervention.
- Performance criterion D: Loss of function or degradation of performance which is not recoverable .Owing to damage of hardware software, or loss of data.

9. 安全要求/SAFETY

9.1 安全:符合标准./ Safety: Accord With.

电源设计用于室内使用, 满足 IEC 60601-1/UL60601-1N 和 60601-1 标准和以下安全规定。

The power supply is designed for indoor use to meet IEC 60601-1 and EN 60601-1standards and for the following safety regulations.

	Item	Country	Standard
<input type="checkbox"/>	UL	USA	UL60950-1/UL60601-1
<input checked="" type="checkbox"/>	CE	Europe	EN60950-1/EN60601-1
<input checked="" type="checkbox"/>	CB	Worldwide	IEC60601-1
<input type="checkbox"/>	TUV	Germany	IEC60601-1
<input checked="" type="checkbox"/>	NRTL	CUSA	IEC60601-1/UL60601-1
<input type="checkbox"/>	GS	Germany	EN60601-1
<input type="checkbox"/>	BS	England	EN60601-1
<input type="checkbox"/>	SAA	Australia	AS/NZS6-1

9.2 高压/Dielectric Strength Hi-Pot:

初级对次级/The primary to secondary: 4000Vac 5mA for 60 seconds.



深圳市龙星辰电源有限公司
Shenzhen Longxc Power Supply Co.,LTD


型号/Model: LXCP96/LXCP96(II)系列

客户/Customer:

日期/Date: 2022.09.09


文件编号/ Document No.: LXC/RD-Spec. -309

10. 结构参数/MECHANICAL

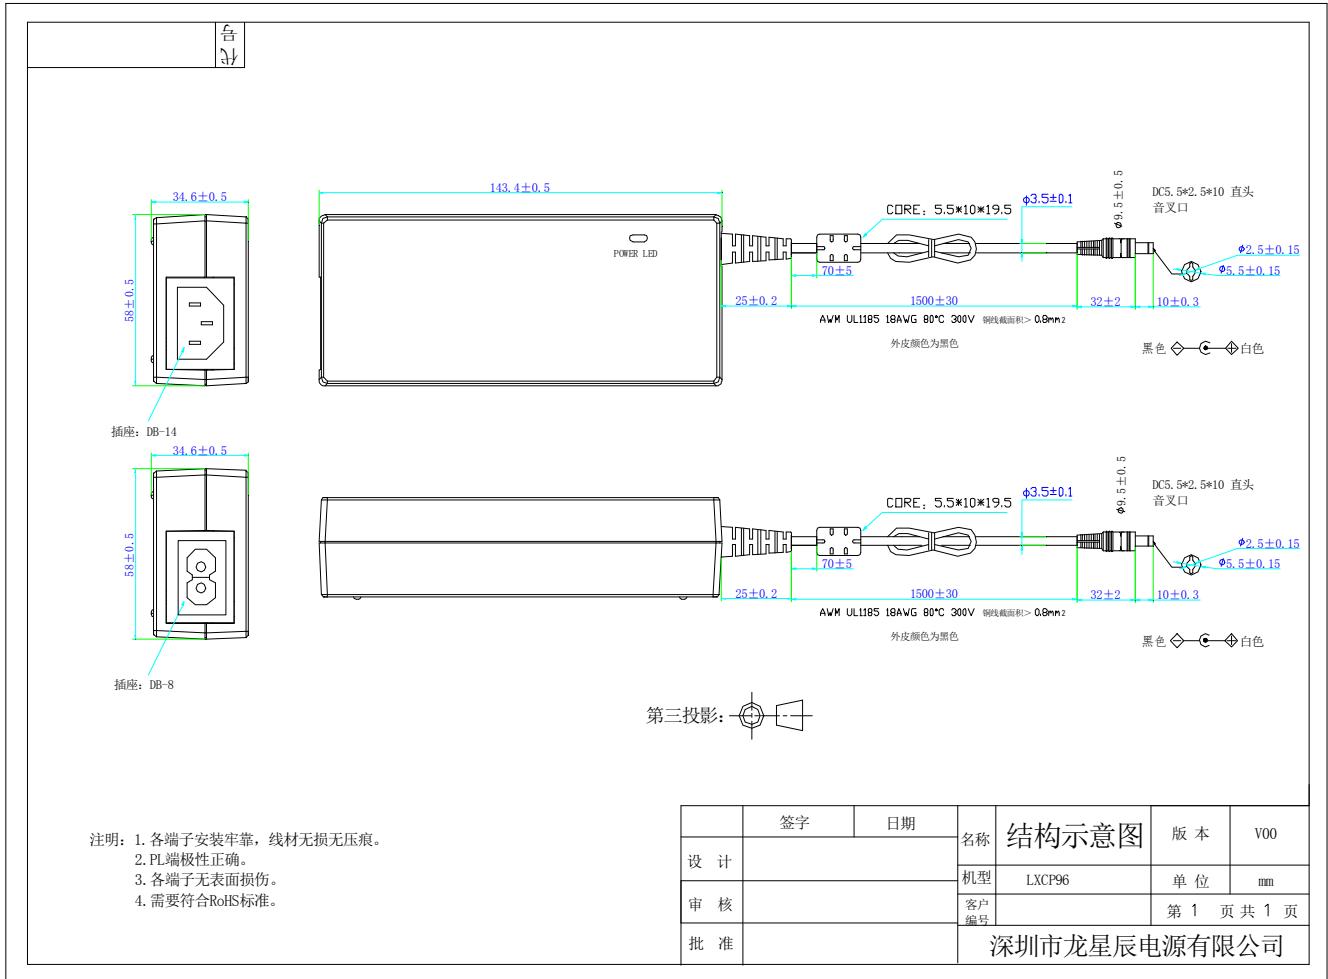

11. 线材/DC CABLE DIAMETER

11.1 可选直流插头图/ Optional DC Plug :

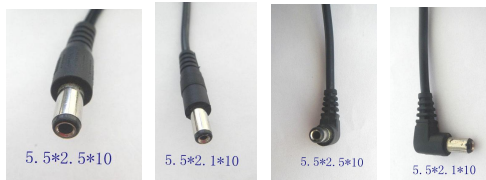


注意: 图中只是列举了部分插头图, 详细信息从 LXC_线材统计表工作簿 xlsx 文件中选择。

Note: The figure only lists part of the optional DC plug diagram, the details are selected from the LXC_cable statistics workbook xlsx file.







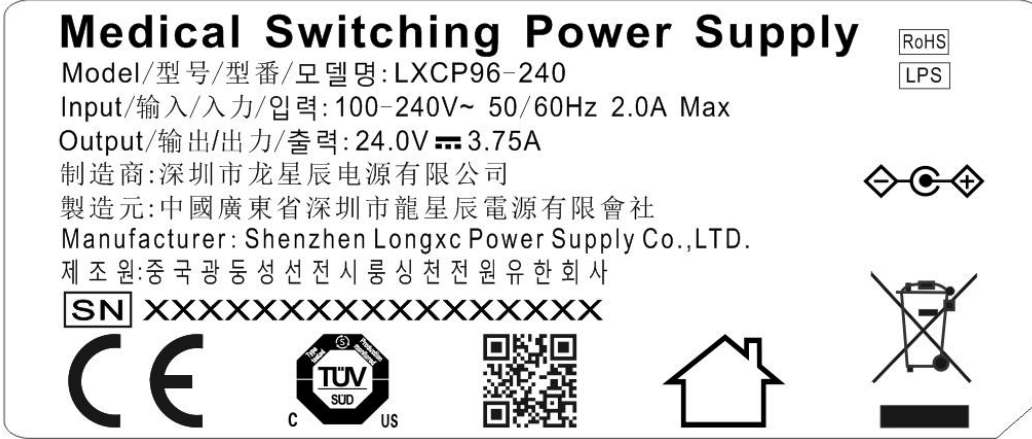

型号/Model: LXCP96/LXCP96(II)系列
客户/Customer:
日期/Date: 2022.09.09
文件编号/ Document No.: LXC/RD-Spec. -309

12. 铭牌/ NAMEPLATE

标签尺寸/ Nameplate size: 89*37.5 (mm)



铭牌符号说明 :/ Symbol explanation on nameplate:

-  :环保标志/ RoHS mark
-  :CE 标志/ CE mark
-  : 直流标志/Direct current
-  :输出极性标志/ DC Cable
-  : 室内使用/In-door use only
-  :限功率电源/Limited power source
-  : 二维码/Two-dimensional code
-  : 保护环境 —— 废弃电器产品应统一回收处理, 不能随意丢弃/ Environment protection- waste electrical products should not be disposed of with household waste. Please follow the local government guidelines

SN: 代表序列号/SN: Serials number

X 代表 RoHS (1 位) : RoHS 区分 0 为 RoHS, 1 为非 RoHS; /1bit:0=RoHS, 1=No RoHS

XX 代表 生产批次 (2 位) : 如第一批为 01……以此类推; /2bit:batch

XX 代表 电源型号 (2 位) : LXCP96 系列为 96; /2bit:model no

X 代表 生产加工商 (1 位) : LXC 为 1; /1bit: manufacturer

XX 代表 PCB 版本 (2 位) : 01 为 01, 02 代表 02 号……以此类推; /2bit: PCB versions

XX 代表 生产年份 (2 位) : 2020 为 20, 2021 代表 21……以此类推; /2bit:year

XX 代表 生产周期 (2 位) : 第 1 周为 01, 02 周为 02……52 周代表 52; /2bit:wee

XXXXX 代表 订单数量 (5 位) : 如订单量为 10000 个, 标识为 00001-10000。/5bit: number



深圳市龙星辰电源有限公司
Shenzhen Longxc Power Supply Co.,LTD

型号/Model: LXCP96/LXCP96(II)系列

客户/Customer:

日期/Date: 2022.09.09

文件编号/ Document No.: LXC/RD-Spec. -309

13. 包装说明/PACKING

- 电源重量:约 370g
- The weight of the power supply shall be about 370g
- 包装方式:40pcs/箱 (尺寸:465.0*425.0*195.0mm)
- Packing Q'ty :40pcs/box (Size:465.0*425.0*195.0mm)
- 重量:约 15.8kg
- Weigh :About 15.8kg

纸箱: 465.0×425.0×195.0mm

20台/层×2层=40台/箱

重量: 约15.8千克/箱

外箱丝印:

深圳市龙星辰电源有限公司

Shenzhen LongXC Power Supply Co., LTD.

Add:深圳市宝安区石岩街道应人石文韬科技园B栋4-5层



4-5/F,B Building, Yingrenshi Community, Wentao Science Park,

Shiyan Town, Bao'an, Shenzhen, China


Tel: 0755-27784192 27864721

Fax: 0755-29991201


Web: <http://www.longxc.com>

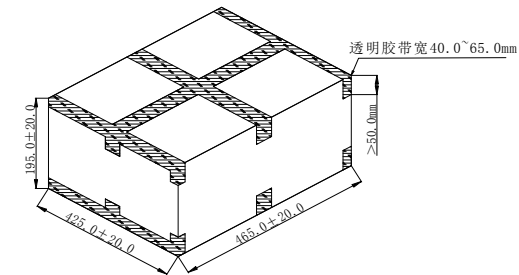


PE袋




平卡

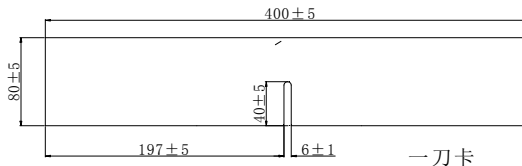

一刀卡

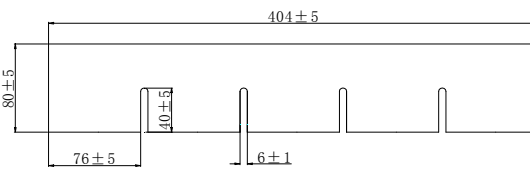

四刀卡



刀卡组合

