

**GN10 GPON ONT  
(1GE)  
Specifications**

<b>Version</b>	<b>Date</b>	<b>Author</b>	<b>Reviewers</b>	<b>Remark</b>
V1.0	2017/2/18			Shall not disclose to any third party

# Contents

<b>1.Overview .....</b>	<b>4</b>
1.1 Product Positioning .....	4
1.2 Network Mode .....	4
<b>2.Hardware Feature .....</b>	<b>5</b>
2.1 Interface of device .....	5
2.2 Indicators of device .....	5
<b>3.Technical specifications .....</b>	<b>6</b>
3.1 Physical structure, Environment and Electrical parameter .....	6
3.2 GPON Interface Specifications .....	6
3.3 Software function .....	7

# 1.OVERVIEW


---

## 1.1 Product Positioning

GN10 terminal devices are designed for fulfilling FTTH and triple play service demand of fixed network operators or cable operators. The box is based on the mature Gigabit GPON technology which can connect GPON OLT automatically. They are highly reliable and easy management and guaranteed QoS. And It is fully compliant with technical regulations such as ITU-T G.984.x.

## 1.2 Network Mode

GN10 is the FTTH mode terminal equipment which designed for indoor applications. Specific application refers to Picture 1-1

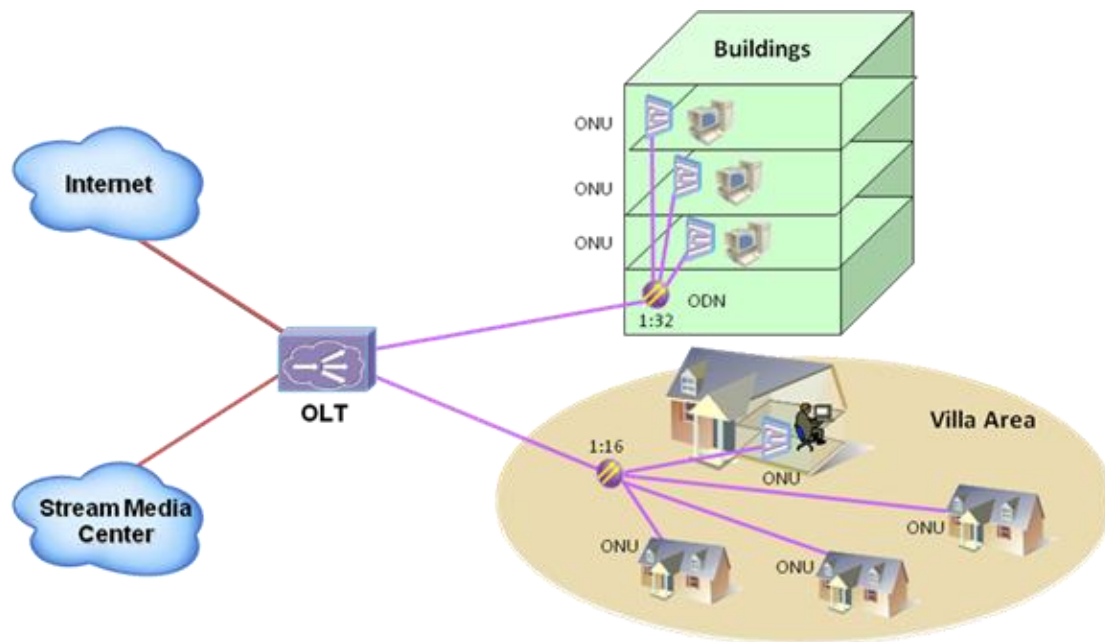

Picture 1-1 GN10 products Network diagram

## 2.HARDWARE FEATURE

---

### 2.1 Interface of device

GN10 product figure as Picture 2-1



Picture 2-1 GN10 product figure

Table 2-1 Description GN10 equipment Interface

Port Type	Function
PON port	Connect PON port with internet by SC type, single mode optical fiber cable
LAN port	RJ45Port connects to local internet, 1 GE port automatically
PWR port (DC12 V)	Connect with power adapter
Power turn on/off	Power turn on/off

### 2.2 Indicators of device

Table 2-2 GN10 LED statement

Indicators	status	Description
POWER	Light on	ONU power supply normally
	Light off	ONU no power supply
PON	Light on	ONU link active
	Flash	ONU manage to link
	Light off	ONU receiving power rate lower than optical receiver sensitivity
LOS	Blink	Device does not receive optical signals.
	off	Device has received optical signal.
LAN	Light on	network port linked, but no data transmitting

	Flash	network port data pass
	Light off	ONU no power supply or internet cable unlink

## 3. TECHNICAL SPECIFICATIONS

---

### 3.1 Physical structure, Environment and Electrical parameter

Table 3-1 GN10 specification and working environment

Parameter	Nominal
Dimension	110mm x 100mm x 23mm (L×W×H)
Net weight	0.3kg
Typical power consumption	<5W
Noise	None
Cooling style	Naturally cooling
Power supply	12V DC (By external AC/DC adapter)
Installation style	Support PC, wall mount or put inside of information box.
Environment	0~45°C
Atmospheric pressure	70~106Kpa
MTBF	50,000hours
MTTR	30minutes
Parameter	Nominal

### 3.2 GPON Interface Specifications

Table 3-2 GN10 GPON Interface

Parameter	Nominal
Connector style	SC/UPC (SC/APC optional)
PON quantity	1
Fiber style	Single mode
Wavelength	TX: 1310 +/-20nm RX: 1490 +/-10nm
PON interface standard	ITU-T G.984.2/ITU-T G.984.3/ITU-TG.988 Class B+
PON interface receiving rate	2.488Gpbs
PON interface transmitting rate	1.244Gpbs
Output optical power	Min: 0dBm                      Max: +5dBm
Opticalreceiver sensitivity	Precede -28dBm
The length of the optical link	Max 20km

### **3.3 Software function**

- Support Multiple VLAN
- Support network storm control.