

# XPTN-9000-65-5GP-X

## MAIN FEATURES



**5\*10/100/1000Base-T**

**Industrial Ethernet PoE Switches**

**Input Voltage:** DC10~58V(Non-PoE),  
DC48~58V(PoE)

**Operating Temperature:** -40°C ~ +75°C

**Shell:** IP50 protection, fanless design

**Test Report:** CCC, RoHS, FCC, CE

**Anti-static:** 8KV-15KV

**MTBF:** 100000 Hour

## PRODUCT DESCRIPTION

This device is 5\*10/100/1000Base-T Industrial Ethernet PoE Switches. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments.


**Scodena**

# PRODUCT PARAMETERS


<b>Provider Mode Ports</b>	
Fixed port	5*10/100/1000 Base-T
Power interface	Phoenix terminal, redundant dual power supply
LED Indicators	PWR, OPT, NMC, ALM
<b>DIP Switch</b>	
1 C/D	Reserve
2 LGY	Stand/Non-standard PoE Mode
3 VLAN	Port Isolation
4 RST	Reset
<b>Cable Type &amp; Transmission Distance</b>	
Twisted-pair	0-100m (CAT5e,CAT6)
Monomode optical fiber	/
Multimode (optical) fiber	/
<b>Network Topology</b>	
Ring topology	Unsupported
Star topology	Support
Bus topology	Support
Tree Topology	Support
<b>Electrical Specifications</b>	
Input voltage	DC10-58V(Non-PoE), DC48~58V(PoE)
Total Power consumption	<6W(Non-PoE); <126W(PoE)
Voltage Alarm	Support
<b>PoE</b>	
PoE port	1-4
PoE Protocol	802.3af, 802.3at
Pin Assignment	12+, 26-
PoE Mode	Standard & non-standard are supported
<b>Layer 2 Switching</b>	
Switching capacity	10G
Packet forwarding rate	7.44Mpps
MAC address table	8K
Buffer	1M
Forwarding delay	<5us
MDX/MIDX	Support
Flow control	Support
Jumbo Frame	Support 10Kbytes
WatchDog	Support
Port Isolation	Support
<b>Environment</b>	

Operating temperature	-40°C~+75°C The device is tested for 8 hours at temperatures in 85°C
Storage temperature	-40°C~+85°C
Relative humidity	5%~95% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours
<b>Mechanical Dimensions</b>	
Product size	65X104X143mm
Installation Method	DIN-rail
Weight	0.7KG around
<b>EMC &amp; Ingress Protection</b>	
IP Level	IP50
Surge protection of Power	IEC 61000-4-5 Level X (10KV/10KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level X (6KV/4KV) (10/700us)
RS	IEC 61000-4-3 Level 3 (10V/m)
EFI	IEC 61000-4-4 Level 3 (1V/2V)
CS	IEC 61000-4-6 Level 3 (10V/m)
PFMF	IEC 61000-4-8 Level 4 (30A/m)
DIP	IEC 61000-4-11 Level 3 (10V)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free fall	0.5m
<b>Authentication</b>	
Authentication	CCC, CE, FCC, RoHS
<b>Accessories</b>	
Accessories	Device, Terminals, Specification, Certificate, power adapter(optional)
<b>Optional Model</b>	
XPTN-9000-65-5GT-X	5*10/100/1000Mbps RJ45 Port


# SIZE AND APPEARANCE

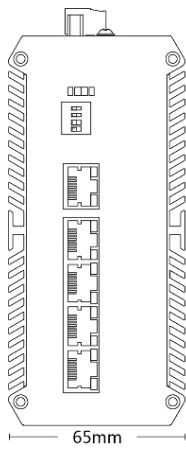


Front view

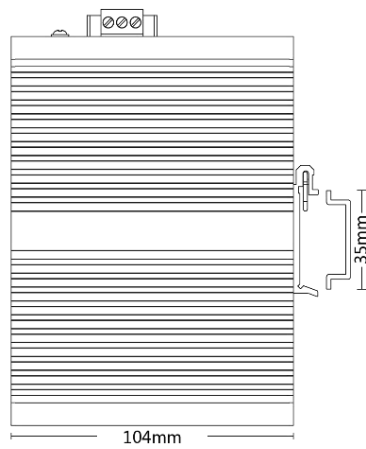


Side view

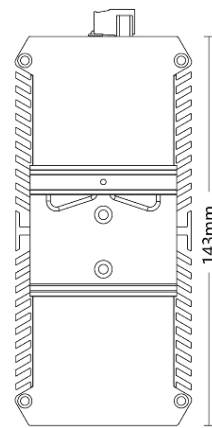

Back view



Bottom



Top view