

LED Track Light - LH-TMCG




led track light

COMPACT AND DISTINCTIVE.

If you are a fan of compact luminaires, the spotlight is perfect for you. The design of this adjustable 3-phase track spot is really distinctive, with the incorporated driver installed into the Nordic track adapter. You can choose from three sizes and a wide range of light colours and accessories, which makes popular in shops, showrooms and hospitality establishments.


LH-TMCG-020

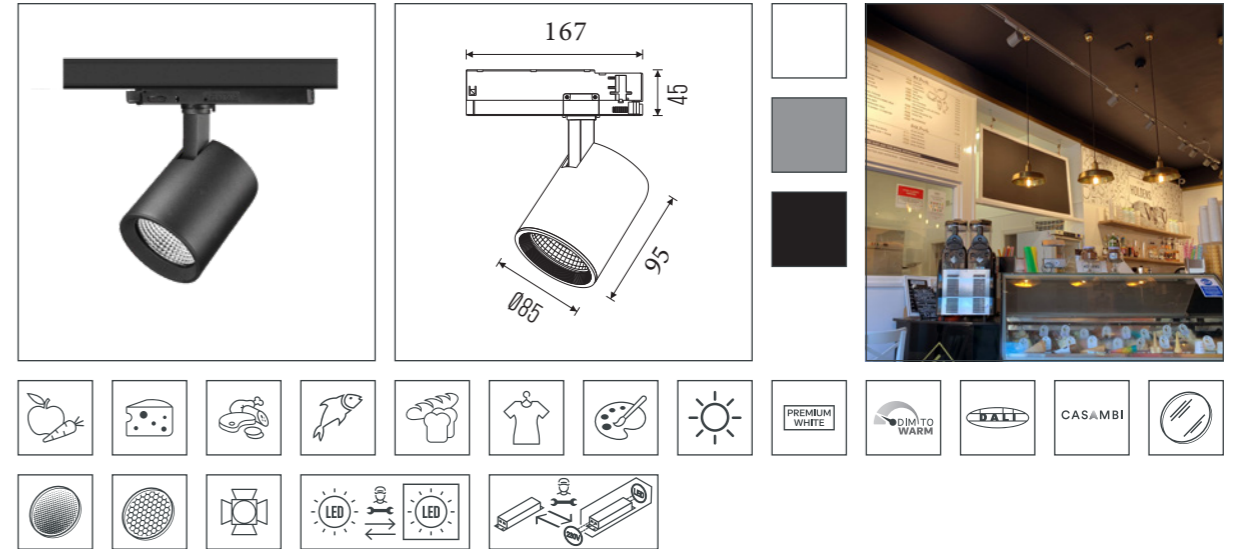

Adjustability	: 350° rotational and 90° tiltable	Optic	: Facet anodized aluminum reflector 15°, 24°, 45°, 55°
CCT	: 2700K - 5700K	Mains voltage	: 220-240V / 50-60Hz
CRI	: (RA) >90, (RA) >97, (RA) >80	Max. ambient temperature	: 35°C
Chromaticity tolerance	: 3	Ingress protection	: IP20
Luminous flux	: max. 2300Lm	Net. weight	: 0.65Kg
Connected load	: max. 20.0W	Warranty	: 5 years
System efficiency	: max. 100-130 Lm/W		
Electrical Safety Class	: Class II		

led track light

LH-TMCG-030


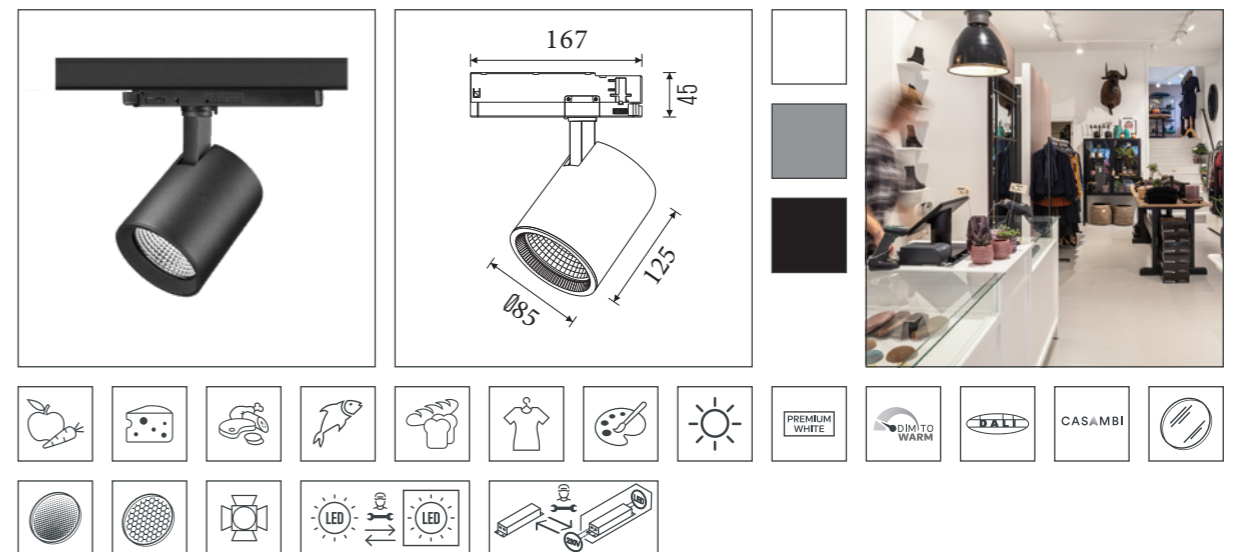


Adjustability	: 350° rotational and 90° tiltable	Optic	: Facet anodized aluminum reflector 15°, 30°, 45°, 55°
CCT	: 2700K - 5700K	Mains voltage	: 220-240V / 50-60Hz
CRI	: (RA) >90, (RA) >97, (RA) >80	Max. ambient temperature	: 35°C
Chromaticity tolerance	: 3	Ingress protection	: IP20
Luminous flux	: max. 3500 Lm	Net. weight	: 0.85Kg
Connected load	: max. 30 W	Warranty	: 5 years
System efficiency	: max. 100-130 Lm/W		
Electrical Safety Class	: Class II		

LH-TMCG-035

Optional
High Efficiency

Improved performance
energy-saving
up to 20%
(930/940HE)

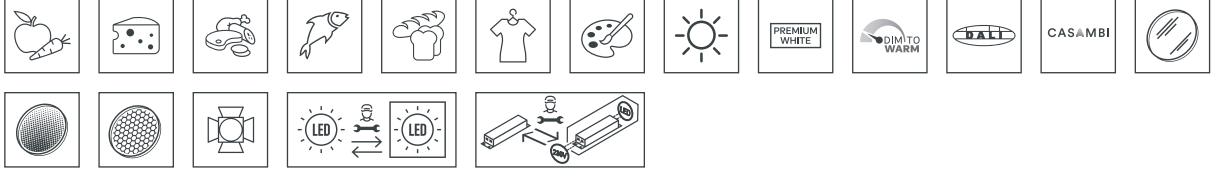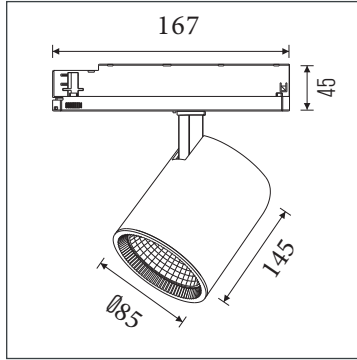

Adjustability	: 350° rotational and 90° tiltable	Optic	: Facet anodized aluminum reflector 15°, 30°, 45°, 60°
CCT	: 2700K - 5700K	Mains voltage	: 220-240V / 50-60Hz
CRI	: (RA) >90, (RA) >97, (RA) >80	Max. ambient temperature	: 35°C
Chromaticity tolerance	: 3	Ingress protection	: IP20
Luminous flux	: max. 4450 Lm	Net. weight	: 1.00Kg
Connected load	: max. 35.0W	Warranty	: 5 years
System efficiency	: max. 100-130 Lm/W		
Electrical Safety Class	: Class II		



led track light