


LED Track PUY Light

For retail & supermarket lighting

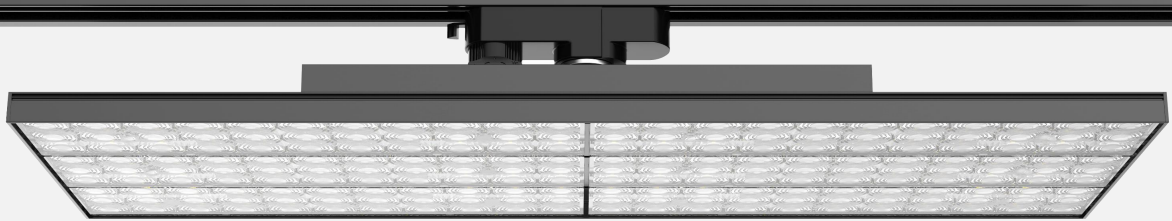


— Born to illuminate the supermarket —

Zhaofeng Industrial Park, No. 16, Shuitian 1st Road, Tongle community, Baolong street, Longgang District, Shenzhen, P.R.C

©2010-2022 LITEHOME. All rights reserved.

www.litehomeled.com

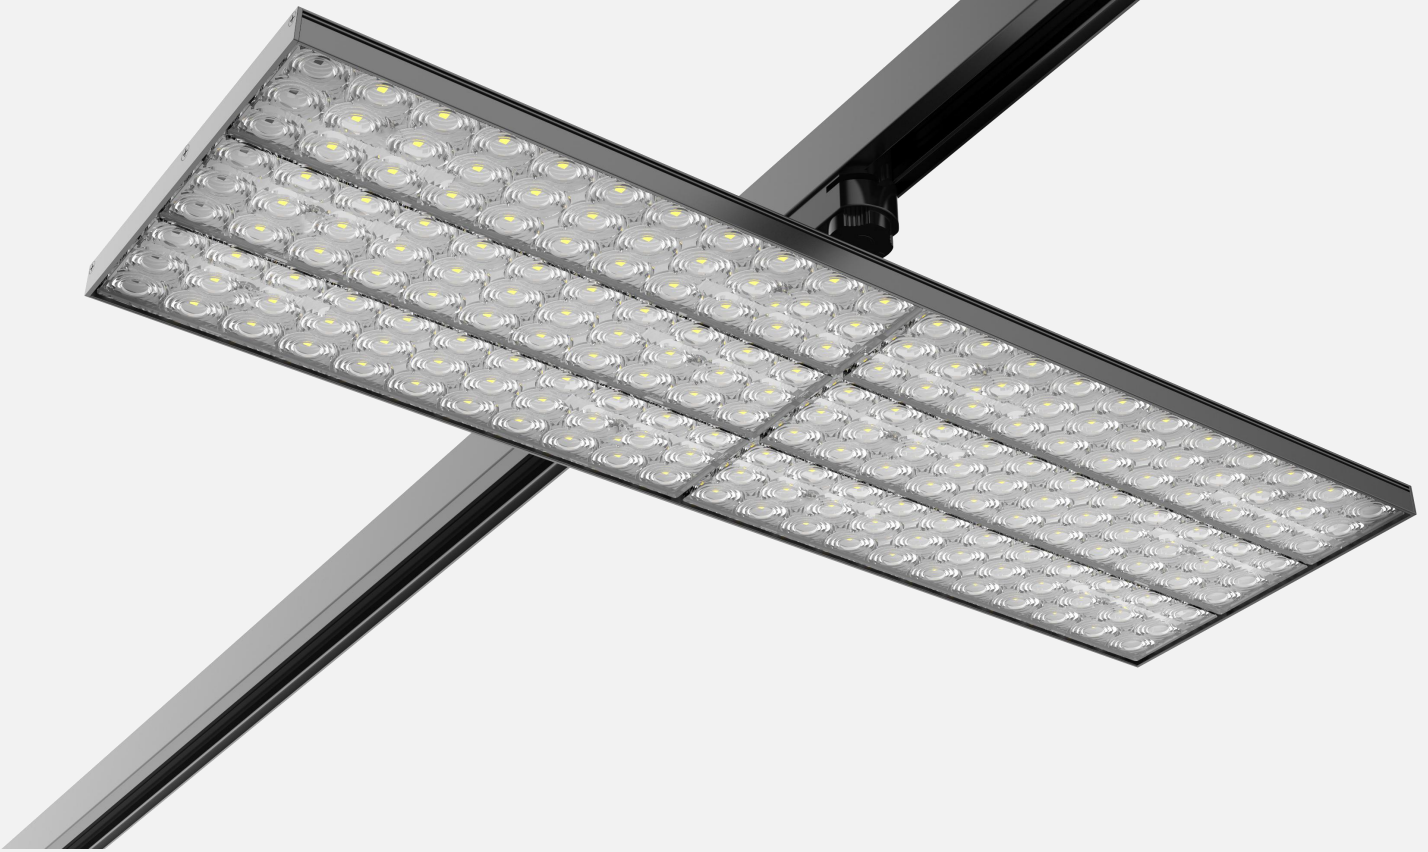

Description

The track panel series is highly versatile: different lens optics (30° , 60° , 90° , 110° , double asymmetric and single asymmetric is optional) combined and the track-mounted variant can be rotated. It can meet the needs in conventional general lighting, also, the track panel is suitable for places with special light distribution requirements, such as shelf and aisles lighting.

The track panel series is simple and compact, suitable for European standard three-circuit track system, which is convenient for group control management. At the same time, it has multiple smart control option, such as DALI dimming, 1-10V dimming, etc.






Key Features


Universal track adaptor design, compatible with multiple-brands European 3 circuits track.

A variety of light distribution angles are available to meet different application needs.


The luminaire can be rotated through $\pm 350^\circ$.

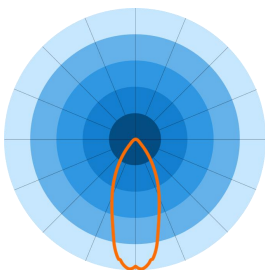


30°

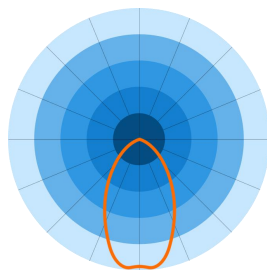


60°

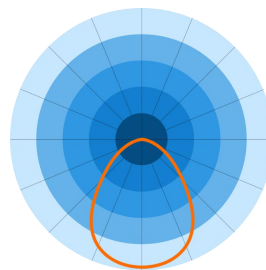


90°



110°

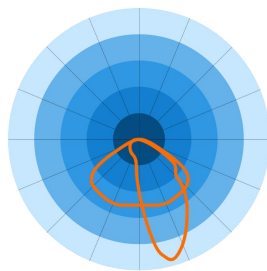

Single asymmetric 15°

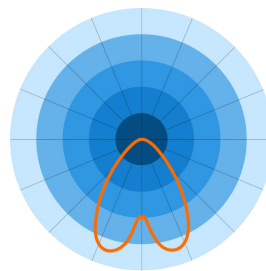

Double asymmetric 20°

Data Sheet



Available in black and white



Order Information

| Item No. | Total Power | Luminous Flux | Flux Efficiency | Warranty |
|------------------|-------------|---------------|-----------------|----------|
| LH-TLF2-030-XXXX | 30W | 4200Lm | 140Lm/W | 5 Years |
| LH-TLF2-040-XXXX | 40W | 5600Lm | 140Lm/W | 5 Years |
| LH-TLF2-060-XXXX | 60W | 8400Lm | 140Lm/W | 5 Years |
| LH-TLF2-070-XXXX | 70W | 9800Lm | 140Lm/W | 5 Years |

Other Information

| | | | |
|---------------------------|--|------------------------------------|---------------------|
| Input Voltage | AC220-240V / AC100-277V | Power Frequency | 50/60 HZ |
| CCT | 2200K, 2700K, 3000K, 4000K, 5000K, 6000K | Operating Temperature Range | -25°~+50° |
| CRI | >80 Ra, >90 Ra, >97 Ra | Operating Humidity Range | 20-90%RH |
| Protection Level | IP20 | Net weight | 2.15KG(@70W) |
| Finish | Luminaire: Black, White, Gray; Track: Black, White, Gray | Rotatable angle | Rotate through ±35° |
| Light Distribution | 30°, 60°, 90°, 110°, single asymmetric 15°, Double asymmetric 25°. | | |
| Dimension(L*W*H) | 580mm×190mm×116mm | | |

Dimension Diagram

