



一站式包装 点数解决方案整合专家

One-stop packing solution for standard
or customized machine

地址：广东省东莞市桥头镇大西一路三街17号优客科技产业园
地址：东莞市桥头镇桥新西二路10号园区8号栋
电话：0769-83568851 传真：0769-81190573
400服务热线：400-050-5292
邮箱：cfpack88@163.com 网址：http://www.cfpack88.com

Add: Youke Industrial Park, No.17, 3rd Street, Daxi 1st Road,
Qiaotou Town, Dongguan city
Tel: 0769-83568851 Fax: 0769-81190573
E-mail: cfpack88@163.com Web: http://www.cfpack88.com



微信公众号



手机网站

东莞市库科智能设备有限公司

DONGGUAN CUKKE INTELLIGENT EQUIPMENT CO., LTD.

东莞市长发智能包装科技有限公司

DONGGUAN CHANFER INTELLIGENT PACKING TECHNOLOGY CO., LTD.

目录 CONTENTS

公司简介	1
资质证书	3
客户案例	3
客户现场	4
ZS-220XL纸膜反拉膜高速伺服包装机	5
ZS-220X 反拉膜高速伺服包装机	6
ZS-220X 推杆式三伺服包装机	7
ZS-360 上走膜高速伺服包装机	8
ZS-450X 皮带式下走膜伺服包装机	9
ZS-450X 下走膜水果全自动伺服包装机	10
ZS-450X下走膜反拉膜伺服包装机	11
ZS-450X 推杆式下走膜三伺服包装机	12
ZS-580X 下走膜高速伺服包装机	13
ZS-700X 下走膜自感应伺服包装机	14
FK-100自动发卡机/自动分卡机	15
FK-300自动发卡机/自动分卡机	17
FK-420自动发卡机/自动分卡机	19
FK-600自动发卡机/自动分卡机	20
自动装袋机/套袋机	21

Company Profile	1
Qualification Certificate	3
Client case	3
Client site	4
ZS-220XL Paper Film High-speed Servo Packing Machine	5
ZS-220X High speed servo packaging machine	6
ZS-220X High speed servo packaging machine	7
ZS-360X high speed film-below feeding servo packing machine	8
ZS-450X belt-type servo Packing machine	9
ZS-450x Film-below Feeding Servo Fully-automatic Fruit Packing Machine	10
ZS-450X High speed servo packaging machine	11
ZS-450X High speed servo packaging machine	12
ZS-580X high speed film-below feeding servo packing machine	13
ZS-700X film-below feeding vegetable servo packaging machine	14
FK-100 Automatic Card Sender/Automatic Card Machine	15
FK-300 Automatic Card Sender/Automatic Card Machine	17
FK-420 Automatic Card Sender/Automatic Card Machine	19
FK-600 Automatic Card Sender/Automatic Card Machine	20
Self-adheslve Bag Packing Machine	21



COMPANY PROFILE

公司简介

东莞市长发智能包装科技有限公司是从事高端伺服枕式包装机、自粘条装袋机、自动发卡机、自动投料机、纸箱类开箱、封箱机、分页机及其他包装类非标化设备的生产与制作的公司。

长发专注于设备的制造与实践，为此公司下辖六大制造部门，枕式包装机制造部（库科公司）；发卡机制造部、装袋机制造部、包装加工部，零件机械加工部（长发同创公司）非标化设备制造部（派尼尔公司）。

设备制造——专注于包装自动化发展趋势的研究，凭借着多年的技术经验以及创新精神，积极为各类企业提供适合的自动化设备，为客户减少人工，创造价值。

包装加工——5000平大型无尘包装加工场地，自有包装设备，自有人员，代客购买包装材料，客户只需要提供内包装物，真正为客户实现全方位一站式包装加工服务，让客户接单无忧。

长发智能包装科技，做包装领域的整合者，用服务的理念做机械，打造包装行业服务优质品牌。

企业理念：长期合作共同发展

愿 景：整合包装行业资源，做包装设备服务领域第一品牌。

价 值 观：●为客户提供优质产品与服务

- 为企业人才提供成长机会，提高收入，提升社会地位
- 为投资者提供持续增长的回报
- 成为充满正能量及强大凝聚力的集体，为社会传递正能量



Dongguan Chanfer Intelligent Packing Technology Co., Ltd is engages in manufacturing packaging machinery, automatic card sender machine, counting paging machinery and other non-standard equipment.

Chanfer Packing Service focus on the equipment manufacture and practice, there are two operations center under the jurisdiction of company, Equipment Manufacturing Division and Packaging Processing Division

Equipment Manufacturing Division----Focus on research the packaging market development trend all the time. The department with years of technical experience and innovative spirit, actively provide the most suitable for automated packaging equipment for all kinds of enterprises.

Packaging Processing Division----Processing site for clean room. The department will provide packaging equipment, staff and packaging film, the customer only need provide inner packaging. Then we can provide comprehensive packaging solutions and packaging services, realize a one-stop packaging services for customers truly.

Chanfer packing service, which as an integrators in the packaging area, and with the concept of service to making machine, to create the first brand of packaging service.

Corporate philosophy: Long-term cooperation and development together.

Vision: Integrated packaging industry resources, create the first brand of packaging service.

Values: ● Provide high quality product and service for customers

- Provide growth opportunities for business professionals, increase revenue, enhance the social status
- Provide continued growth returns for investors
- Become full of positive energy and a strong cohesion collective, transfer positive energy to society



资质证书 QUALIFICATION CERTIFICATE



客户案例 Client case



客户现场 Client site



ZS-220XL 纸膜反拉膜高速伺服包装机

ZS-220XL Paper Film High-speed Servo Packing Machine



★性能特点：

1. 伺服控制，袋长即设即切，无需调空走，一步到位，省时省膜。
2. 彩色触摸屏控制，参数设定方便快捷，可储存40种包装参数。
3. 故障自诊断功能，故障显示一目了然。
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
5. 轮加热中封控制，特殊横封加热机构，使纸膜包装封口牢固，美观。
6. 定位停机功能，不粘刀，不浪费包膜。
7. 传动系统简洁，工作更可靠，维护保养更方便。
8. 切到产品自动反转，重启后直接开机方便操作。
9. 没有包装膜，自动停机。
10. 无成型机构，使纸膜无折痕平整成袋。



★应用范围：

适用于包装各类玩具、印刷品、日用品、五金件、文具、电子原件等产品，如：不倒翁、跳跳豆、骨牌、牙刷、香皂、牙膏、笔芯、充电器。

★Applications：

The equipment can be applied to all kinds of toys, printing products, commodity, hardware fitting, stationery, electronic components such as tumbler, beans, toothbrush, soap, toothpaste, adapter.

★技术参数 (Technical parameters)：

机型 (Model)	ZS-220XL
薄膜宽度(Film width)：(Max)220mm	制袋长度 (Bag length)：60-1000mm
制袋宽度(Bag width)：30-90mm	产品高度(Product height)：5-35mm
膜卷直径(Film roll diameter)：(Max)300mm	包装速度(Packaging speed)：20-200bags/Min
电源规格(Power condition)：220V，50/60HZ，2.9KW	机器重量(Machine weight)：480KG
包装材料(Packaging materials)：纸膜 paper film	机器尺寸(Machine Dimensions)：(L)4115×(W)830×(H)1400mm

ZS-220X 反拉膜高速伺服包装机

ZS-220X High speed servo packaging machine



★性能特点：

1. 双伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
2. 彩色触摸屏控制，参数设定方便快捷。
3. 具有参数储存功能，可储存100种包装菜单，更换产品方便快捷。故障自诊断功能，故障显示一目了然。
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
5. 温度独立PID控制，更适合各种包装材质。
6. 定位停机功能，不粘刀，不浪费包膜。
7. 传动系统简洁，工作更可靠，维护保养更方便。
8. 切到产品自动反转，重启后直接开机方便操作。机器异常时，保护刀座，同时更加安全。
9. 没有包装膜，自动停机，更换包装膜既节约时间，又节约包装膜



★Features：

1. Dual frequency conversion control, bag length can be set and cut in one step, saving time and film.
2. Human-machine interface, easy parameter setting. It can store 100 kinds of packing parameters.
3. Self failures diagnosis, clear failure displaying.
4. High sensitivity photocell, digital input of cutting and sealing position for extra accuracy.
5. Separate PID temperature control, suitable for packing different materials.
6. Positioning stop function, not adhesive to cutters and no waste of packing film.
7. Simple driving system, more reliable and more convenient maintenance.
8. Switch to the product inversion automatically, it is convenient to directly operate after reboot.
9. Without verpacking film, it will stop working automatically.

★应用范围：

主要适用于包装各类不规则物品、粘性物品和固态的产品。如：吸盘公仔、跳跳豆、骨牌、胶带、勺子、叉子、牙刷、牙膏、香皂、文具、面包、月饼、药板、溜溜梅、软糖等，用途广泛。

★Applications：

Applicable for packing various irregular objects, adhesive objects and solid objects, such as food, including egg rolls, sausages, squids, instant noodles, snow cakes, preserved fruits, jelly drops etc; others, including soaps, essential balm mini-notebooks, box-packed pens, tapes, medicines etc. It's widely used.

★技术参数 (Technical parameters)：

机型 (Model)	ZS-220X
薄膜宽度(Film width)：(Max)220mm	制袋长度 (Bag length)：60-1000mm
制袋宽度(Bag width)：30-90mm	产品高度(Product height)：5-35mm
膜卷直径(Film roll diameter)：(Max)300mm	包装速度(Packaging speed)：20-220bags/Min
电源规格(Power condition)：220V，50/60Hz，2.9KW	机器重量(Machine weight)：450KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP,PT/PE等	机器尺寸(Machine Dimensions)：(L)4115×(W)830×(H)1400mm

ZS-220X 推杆式三伺服包装机

ZS-220X High speed servo packaging machine



★性能特点(Features)

1. 三伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
2. 彩色触摸屏控制，参数设定方便快捷。
3. 具有参数储存功能，可储存100种包装菜单，更换产品方便快捷。故障自诊断功能，故障显示一目了然。
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
5. 温度独立PID控制，更好适合各种包装材质。
6. 定位停机功能，不粘刀，不浪费包膜。
7. 传动系统简洁，工作更可靠，维护保养更方便。
8. 切到产品自动反转，重启后直接开机方便操作。机器异常时，保护刀座，同时更加安全。
9. 没有包装膜，自动停机，更换包装膜既节约时间，又节约包装膜。
10. 可根据需要，实现柔性包装，即自动检测产品长度，自动变换包装膜长度，无需设置任何参数。
11. 可选机型有皮带式加档格，皮带式（方便对接生产线）和推杆式三种结构机型。



★应用范围：

主要适用于包装各类不规则物品、粘性物品和固态的物体。玩具类：不倒翁、跳跳豆、公仔等；印刷品类：说明书、合格证、卡片等；食品类：蛋卷、香肠、鱿鱼、面包、速食面、月饼、果脯、软糖等；其他类：香皂、风油精、袖珍记事本、盒装钢笔、胶带、药品等，用途广泛。

★Applications：

Applicable for packing various irregular objects, adhesive objects and solid objects, such as food, including egg rolls, sausages, squids, instant noodles, snow cakes, preserved fruits, jelly drops etc; others, including soaps, essential balm mini-notebooks, box-packed pens, tapes, medicines etc. It's widely used

★技术参数 (Technical parameters)：

机型 (Model)	ZS-220X
薄膜宽度(Film width)：(Max)220mm	制袋长度 (Bag length)：60-1000mm
制袋宽度(Bag width)：30-90mm	产品高度(Product height)：5-35mm
膜卷直径(Film roll diameter)：(Max)300mm	包装速度(Packaging speed)：20-220bags/Min
电源规格(Power condition)：220V，50/60Hz，2.9KW	机器重量(Machine weight)：450KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP,PT/PE等	机器尺寸(Machine Dimensions)：(L)4115×(W)830×(H)1400mm

ZS-360 上走膜高速伺服包装机

ZS-360 high speed film-below feeding servo packing machine



★性能特点：

1. 三伺服控制，袋长即设即切，无需调空走，一步到位，省时省膜。
2. 彩色触摸屏控制，参数设定方便快捷，可储存40种包装参数。
3. 故障自诊断功能，故障显示一目了然。
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
5. 温度独立PID控制，更好适合各种包装材质。
6. 定位停机功能，不粘刀，不浪费包膜。
7. 传动系统简洁，工作更可靠，维护保养更方便。
8. 切到产品自动反转，重启后直接开机方便操作。
9. 没有包装膜，自动停机。

★Features：

1. Fully servo control, bag length and bag cutting can be set in one step, so time saving and film saving.
2. With colour HMI touch screen control, easy parameter setting. And up to 100 kinds of packaging parameters storage capacity, being more convenient for different product packing.
3. Fault self-diagnostic function, fault could be clear at a glance.
4. High sensitivity photocell for tracking, and digital input for sealing position, which make the sealing more accurate.
5. Separate PID temperature control, being fitter to various packing Material.
6. Positioned stop function, without sticking cutter or wasting film.
7. It makes the machine more reliable and more convenient for maintenance by having a simple transmission system..
8. Cutter automatically contrarotates when product cut, machine directly resumes to work after reboot without any extra setting, and being able to protect the cutter base and be safer if any breakdown.
9. Without verpacking film, it will stop working automatically.



★应用范围：

枕式包装机适用于包装各类有规则的固态产品。如印刷品类：说明书、卡片、贺卡、合格证、保修卡等；日用品类：口罩、玩具、胶布、牙刷、牙膏等；食品类：蛋卷、香肠、鱿鱼、面包、月饼、果脯、软糖等

★Applications：

Applicable for packing various irregular objects, adhesive objects and solid objects, such as food, including egg rolls, sausages, squids, instant noodles, snow cakes, preserved fruits, jelly drops etc; others, including soaps, essential balm mini-notebooks, box-packed pens, tapes, medicines etc. It's widely used.

★技术参数 (Technical parameters)：

机型 (Model)	ZS-360
薄膜宽度(Film width)：Max360mm	制袋长度 (Bag length)：80-1000mm
制袋宽度(Bag width)：40-160mm	产品高度(Product height)：5-60mm
膜卷直径(Film roll diameter)：Max300mm	包装速度(Packaging speed)：20-150bags/Min
电源规格(Power condition)：220V，50/60HZ，5.4KW	机器重量(Machine weight)：500KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP,PT/PE等	机器尺寸(Machine Dimensions)：(L)4020×(W)1060×(H)1520mm

ZS-450X 皮带式下走膜伺服包装机

ZS-450X belt-type servo Packing machine



★性能特点：

- 1.全伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
- 2.彩色触摸屏控制，参数设定方便快捷。
- 3.具有参数储存功能，可储存100种包装菜单，更换产品方便快捷。故障自诊断功能，故障显示一目了然。
- 4.高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
- 5.温度独立PID控制，更好适合各种包装材质。
- 6.定位停机功能，不粘刀，不浪费包膜。
- 7.传动系统简洁，工作更可靠，维护保养更方便。
- 8.切到产品自动反转，重启后直接开机方便操作。机器异常时，保护刀座，同时更加安全。
- 9.没有包装膜，自动停机，更换包装膜既节约时间，又节约包装膜。
- 10.可根据需要，实现柔性包装，即自动检测产品长度，自动变换包装膜长度，无需设置任何参数。
- 11.皮带式输送，采用304不锈钢材质。

★Features：

1. Fully servo control, bag length and bag cutting can be set in one step, so time saving and film saving.
2. With colour HMI touch screen control, easy parameter setting. And up to 100 kinds of packaging parameters storage capacity, being more convenient for different product packing.
3. Fault self-diagnostic function, fault could be clear at a glance.
4. High sensitivity photocell for tracking, and digital input for sealing position, which make the sealing more accurate.
5. Separate PID temperature control, being fitter to various packing Material.
6. Positioned stop function, without sticking cutter or wasting film.
7. It makes the machine more reliable and more convenient for maintenance by having a simple transmission system.
8. Cutter automatically contrarotates when product cut, machine directly resumes to work after reboot without any extra setting, and being able to protect the cutter base and be safer if any breakdown.
9. Without verpacking film, it will stop working automatically.
10. Three model options: film conveyor type (products put on the film directly), belt type (convenient to butt joint with other production line), and push-rod type.



★应用范围：

主要适用于包装各类不规则物品、粘性物品和固态的物体。食品类：蛋卷、香肠、鱿鱼、面包、速食面、月饼、果脯、软糖等；其他类：香皂、风油精、袖珍记事本、盒装钢笔、胶带、药品等，用途广泛。

★Applications：

Applicable for packing various irregular objects、adhesive objects and solid objects, such as food, including egg rolls、sausages、squids、instant noodles、snow cakes、preserved fruits、jelly drops etc; others, including soaps, essential balm mini-notebooks、box-packed pens、tapes、medicines etc. It's widely used

★技术参数 (Technical parameters)：

机型 (Model)	ZS-450X
薄膜宽度(Film width)：(Max)450mm	制袋长度 (Bag length)：80-1000mm
制袋宽度(Bag width)：50-200mm	产品高度(Product height)：5-65mm
膜卷直径(Film roll diameter)：(Max)300mm	包装速度(Packaging speed)：20-1500bags/Min
电源规格(Power condition)：220V，50/60Hz，4.0KW	机器重量(Machine weight)：600KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP,PT/PE等	机器尺寸(Machine Dimensions)：(L)4075×(W)960×(H)1400mm

ZS-450X 下走膜水果全自动伺服包装机

ZS-450x Film-below Feeding Servo Fully-automatic Fruit Packing Machine



★性能特点：

- 1.全伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
- 2.彩色触摸屏控制，参数设定方便快捷。
- 3.具有参数储存功能，可储存100种包装菜单，更换产品方便快捷。故障自诊断功能，故障显示一目了然。
- 4.高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
- 5.温度独立PID控制，更好适合各种包装材质。
- 6.定位停机功能，不粘刀，不浪费包膜。
- 7.切到产品自动反转，重启后直接开机方便操作。机器异常时，保护刀座，同时更加安全；传动系统简洁，工作更可靠，维护保养更方便。
- 8.没有包装膜，自动停机，更换包装膜既节约时间，又节约包装膜。
- 9.防空包功能，没有产品包装膜和切刀不动作，节约包装膜。
- 10.全自动包装无需人工摆料，只需将水果倒入包装机料斗内，机器自动将水果提升送入包装机完成包装。
- 11.水果整线输送采用尼龙辊、毛刷辊、塑料推指输送，防止水果刮伤碰破。

★Features：

1. Full servo control, bag length can be set and cut in one step, time-saving and film-saving.
2. color touchscreen control, easy parameter setting.
3. It can store 100 kinds of packing parameters. Self failures diagnosis, clear failure displaying.
4. High sensitivity photoelectric detector tracking, it becomes more accurate with digital input of cutting and sealing position.
5. Individual PID temperature control, suitable for packing different materials.
6. Positioned stop function, not adhesive to cutters and no waste of packing film.
7. Cutter reversing automatically when it comes that any product is being cut, which protects the cutter and safer.
8. Machine automatically stops when packing film run out .
9. With function of detecting empty bag , no product no packaging film and cutter runs , saving packaging film.
10. No need for manual feeding ,you can just pour the fruit into the hopper of the packaging machine, the machine will automatically lift the fruit into the packaging machine to complete the packaging.
11. Nylon roller, brush roller and plastic pusher are applied to the whole fruit conveyor line to prevent the fruit from being scratched and broken.



★应用范围：

橙子包装机主要适用于各类圆形水果全自动包装，如柠檬、柑桔、柑橘、奇异果、沙糖桔、番石榴、香梨、火龙果、芦柑、橙子、橘子等，用途广泛。

★Applications：

mainly applied to automatic packaging of round-shaped fruit such as lemon, citrus, kiwi, citrus shatangju, guava, pear, dragon fruit, citrus, orange, orange, etc., with a wide range of uses.

★技术参数 (Technical parameters)：

机型 (Model)	ZS-450X
薄膜宽度(Film width)：(Max)450mm	制袋长度 (Bag length)：100-300mm
制袋宽度(Bag width)：60-120mm	产品高度(Product height)：55-90mm
膜卷直径(Film roll diameter)：(Max)300mm	包装速度(Packaging speed)：100-200bags/Min
电源规格(Power condition)：220V，50/60Hz，4.1KW	机器重量(Machine weight)：700KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP	机器尺寸(Machine Dimensions)：(L)4396×(W)1020×(H)1400mm

ZS-450X下走反拉膜伺服包装机

ZS-450X High speed servo packaging machine



★性能特点：

1. 双伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
2. 彩色触摸屏控制，参数设定方便快捷。
3. 具有参数储存功能，可储存100种包装菜单，更换产品方便快捷。故障自诊断功能，故障显示一目了然。
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
5. 温度独立PID控制，更好适合各种包装材质。
6. 定位停机功能，不粘刀，不浪费包膜。
7. 传动系统简洁，工作更可靠，维护保养更方便。
8. 切到产品自动反转，重启后直接开机方便操作。机器异常时，保护刀座，同时更加安全。
9. 没有包装膜，自动停机，更换包装膜既节约时间，又节约包装膜。

★Features：

1. Fully servo control, bag length and bag cutting can be set in one step, so time saving and film saving.
2. With colour HMI touch screen control, easy parameter setting. And up to 100 kinds of packaging parameters storage capacity, being more convenient for different product packing.
3. Fault self-diagnostic function, fault could be clear at a glance.
4. High sensitivity photocell for tracking, and digital input for sealing position, which make the sealing more accurate.
5. Separate PID temperature control, being fitter to various packing Material.
6. Positioned stop function, without sticking cutter or wasting film.
7. It makes the machine more reliable and more convenient for maintenance by having a simple transmission system.
8. Cutter automatically contrarotates when product cut, machine directly resumes to work after reboot without any extra setting, and being able to protect the cutter base and be safer if any breakdown.
9. Without verpacking film, it will stop working automatically.



★应用范围：

主要适用于包装各类不规则物品、粘性物品和固态的物体。玩具类：不倒翁、跳跳豆、公仔等；印刷品类：说明书、合格证、卡片等；食品类：蛋卷、香肠、鱿鱼、面包、速食面、月饼、果脯、软糖等；其他类：香皂、风油精、袖珍记事本、盒装钢笔、胶带、药品等。

★Applications：

Applicable for packing various irregular objects, adhesive objects and solid objects, such as food, including egg rolls, sausages, squids, instant noodles, snow cakes, preserved fruits, jelly drops etc; others, including soaps, essential balm mini-notebooks, box-packed pens, tapes, medicines etc. It's widely used.

★技术参数 (Technical parameters)：

机型 (Model)	ZS-450X
薄膜宽度(Film width)：(Max)450mm	制袋长度 (Bag length)：80-1000mm
制袋宽度(Bag width)：50-200mm	产品高度(Product height)：5-65mm
膜卷直径(Film roll diameter)：(Max)300mm	包装速度(Packaging speed)：20-150bags/Min
电源规格(Power condition)：220V，50/60Hz，4.0KW	机器重量(Machine weight)：600KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP等	机器尺寸(Machine Dimensions)：(L)4075×(W)960×(H)1400mm

ZS-450X 推杆式下走膜三伺服包装机

ZS-450X High speed servo packaging machine



★性能特点：

1. 三伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
2. 彩色触摸屏控制，参数设定方便快捷。
3. 具有参数储存功能，可储存100种包装菜单，更换产品方便快捷。故障自诊断功能，故障显示一目了然。
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
5. 温度独立PID控制，更好适合各种包装材质。
6. 定位停机功能，不粘刀，不浪费包膜。
7. 传动系统简洁，工作更可靠，维护保养更方便。
8. 切到产品自动反转，重启后直接开机方便操作。机器异常时，保护刀座，同时更加安全。
9. 没有包装膜，自动停机，更换包装膜既节约时间，又节约包装膜。
10. 可根据需要，实现柔性包装，即自动检测产品长度，自动变换包装膜长度，无需设置任何参数。
11. 可选机型有全拉膜式（产品直接放在膜上），皮带式（方便对接生产线）和推杆式三种结构机型。

★Features：

1. Fully servo control, bag length and bag cutting can be set in one step, so time saving and film saving.
2. With colour HMI touch screen control, easy parameter setting. And up to 100 kinds of packaging parameters storage capacity, being more convenient for different product packing.
3. Fault self-diagnostic function, fault could be clear at a glance.
4. High sensitivity photocell for tracking, and digital input for sealing position, which make the sealing more accurate.
5. Separate PID temperature control, being fitter to various packing Material.
6. Positioned stop function, without sticking cutter or wasting film.
7. It makes the machine more reliable and more convenient for maintenance by having a simple transmission system.
8. Cutter automatically contrarotates when product cut, machine directly resumes to work after reboot without any extra setting, and being able to protect the cutter base and be safer if any breakdown.
9. Without verpacking film, it will stop working automatically.
10. Three model options: film conveyor type (products put on the film directly), belt type (convenient to butt joint with other production line), and push-rod type.
11. The optional model has full pull packaging film type (product directly on packaging film), belt type (convenient butt joint production line) and push-rod type three kinds of structure models.



★应用范围：

主要适用于包装各类不规则物品、粘性物品和固态的物体。食品类：蛋卷、香肠、鱿鱼、面包、速食面、月饼、果脯、软糖等；其他类：香皂、风油精、袖珍记事本、盒装钢笔、胶带、药品等，用途广泛。

★Applications：

Applicable for packing various irregular objects, adhesive objects and solid objects, such as food, including egg rolls, sausages, squids, instant noodles, snow cakes, preserved fruits, jelly drops etc; others, including soaps, essential balm mini-notebooks, box-packed pens, tapes, medicines etc. It's widely used

★技术参数 (Technical parameters)：

机型 (Model)	ZS-450X
薄膜宽度(Film width)：(Max)450mm	制袋长度 (Bag length)：80-1000mm
制袋宽度(Bag width)：50-200mm	产品高度(Product height)：5-65mm
膜卷直径(Film roll diameter)：(Max)300mm	包装速度(Packaging speed)：20-150bags/Min
电源规格(Power condition)：220V，50/60Hz，4.0KW	机器重量(Machine weight)：600KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP等	机器尺寸(Machine Dimensions)：(L)4075×(W)960×(H)1400mm

ZS-580X 下走膜高速伺服包装机

ZS-580X high speed film-below feeding servo packing machine



★性能特点：

1. 伺服控制，袋长即设即切，无需调空走，一步到位，省时省膜。
2. 彩色触摸屏控制，参数设定方便快捷，可储存40种包装参数。
3. 故障自诊断功能，故障显示一目了然。
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
5. 温度独立PID控制，更好适合各种包装材质。
6. 定位停机功能，不粘刀，不浪费包膜。
7. 传动系统简洁，工作更可靠，维护保养更方便。
8. 切到产品自动反转，重启后直接开机方便操作。
9. 没有包装膜，自动停机。
10. 可根据需要，实现柔性包装，即自动检测产品长度，自动变换包装膜长度，无需设置任何参数。



★应用范围：

枕式包装机适用于包装各类不规则物品、粘性物品和固态的物体。食品类：蛋卷、香肠、鱿鱼、面包、速食面、月饼、果脯、软糖等；其他类：香皂、风油精、袖珍记事本、盒装钢笔、胶布、药品等，用途广泛。

★Applications：

Applicable for packing various irregular objects, adhesive objects and solid objects, such as food, including egg rolls, sausages, squids, instant noodles, snow cakes, preserved fruits, jelly drops etc; others, including soaps, essential balm mini-notebooks, box-packed pens, tapes, medicines etc. It's widely used.

★技术参数 (Technical parameters)：

机型 (Model)	ZS-580X
薄膜宽度(Film width)：Max580mm	制袋长度 (Bag length)：120-1000mm
制袋宽度(Bag width)：100-250mm	产品高度(Product height)：5-75mm
膜卷直径(Film roll diameter)：Max300mm	包装速度(Packaging speed)：20-120bags/Min
电源规格(Power condition)：220V，50/60Hz，4.25KW	机器重量(Machine weight)：650KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP等	机器尺寸(Machine Dimensions)：(L)4210×(W)1070×(H)1400mm

ZS-700X 下走膜自感应伺服包装机

ZS-700X film-below feeding vegetable servo packaging machine



★性能特点：

1. 伺服控制，袋长即设即切，无需调空走，一步到位，省时省膜。
2. 彩色触摸屏控制，参数设定方便快捷，可储存100种包装参数。
3. 故障自诊断功能，故障显示一目了然。
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
5. 温度独立PID控制，更好适合各种包装材质。
6. 定位停机功能，不粘刀，不浪费包膜。
7. 传动系统简洁，工作更可靠，维护保养更方便。
8. 防切料功能，刀口感应到产品自动送出。不会切到产品，保护产品和刀座。
9. 没有包装膜，自动停机。
10. 自动感应产品来包装，有产品走纸和切刀动作，没有产品走纸和切刀不动作，不浪费包膜。



★应用范围：

蔬菜包装机主要适用于包装各类蔬菜，如芹菜、生菜、韭菜、茼蒿、香菜、大葱、茼蒿、萝卜、菠菜、芥菜、白菜、青菜、救心菜、菠菜、葱等，用途广泛。

★Applications：

The equipment is mainly applied to all kinds of vegetables, such as celery, lettuce, leeks, coriander, scallion, carrot, spinach, leaf mustard, cabbage, pak choi, spinach, etc

★Features：

1. Fully servo control, bag length and bag cutting can be set in one step, so time saving and film saving.
2. With colour HMI touch screen control, easy parameter setting. And up to 100 kinds of packaging parameters storage capacity, being more convenient for different product packing.
3. Fault self-diagnostic function, fault could be clear at a glance.
4. High sensitivity photocell for tracking, and digital input for sealing position, which make the sealing more accurate.
5. Separate PID temperature control, being fitter to various packing Material.
6. Positioned stop function, without sticking cutter or wasting film.
7. It makes the machine more reliable and more convenient for maintenance by having a simple transmission system.
8. Cutter automatically contrarotates when product cut, machine directly resumes to work after reboot without any extra setting, and being able to protect the cutter base and be safer if any breakdown.
9. Machine automatically stops when film runs out. Time-saving and film-saving.
10. Product detecting function, no film feeding or cutting when no product detected. Film-saving.

★技术参数 (Technical parameters)：

机型 (Model)	ZS-700X
薄膜宽度(Film width)：Max700mm	制袋长度 (Bag length)：100-1000mm
制袋宽度(Bag width)：100-300mm	产品高度(Product height)：5-150mm
膜卷直径(Film roll diameter)：Max300mm	包装速度(Packaging speed)：20-50bags/Min
电源规格(Power condition)：220V，50/60Hz，4.45KW	机器重量(Machine weight)：700KG
包装材料(Packaging materials)：OPP, OPP/PE, OPP/PP等	机器尺寸(Machine Dimensions)：(L)4255×(W)1220×(H)1500mm

FK-100自动发卡机/自动分卡机

FK-100 Automatic Card Sender/Automatic Card Machine



★性能特点：

- 1.伺服电机驱动系统，PLC控制器以及触控界面，操作简单易用。各种设置、操作均可在触摸屏上轻松完成，同时具有储存功能，设置好相关数据开机自动操作。
- 2.伺服电机最高速度可达到50米/分钟。
- 3.自动发卡机对接全自动包装机，根据不同的包装数量快速自动发卡。
- 4.漏卡、无卡自动报警功能，可选择发单张、多张及连续发卡功能。
- 5.采用光电控制，开启总电源开关后，光电感应，自动发卡。
- 6.与自动化包装设备的匹配，真正实现一体化自动包装。
- 7.系统本身带有多项功能设定，包括预发卡长度、每次设定发卡数量、重卡无卡时有自动停机报警等功能，实时在线控。
- 8.结构设计合理，更换易损件简单快捷。



★应用范围：

本产品将整叠片状产品如：明信片、贺卡、挂牌、包装袋、未成形纸盒、标签、信封、红包等；
折叠状产品如：说明书、宣传海报及各种不同尺寸的折叠状产品；
本状产品如：说明书、卡片书、笔记本、动漫小书、杂志及各种不同尺寸的本状产品，自动分开，成单个传送到输送带上。它既能够单独作分卡计数使用，亦可以轻松地整合到相关联的设备中作自动分卡、配合各种自动包装线使用例如：枕式包装机、立式包装机、自动输送机、自动收缩包装机等。

★Applications：

A whole stack of sheeted products such as postcard, greeting card, hangtag, packaging bag, unformed box, label, envelope, red envelope and etc;
Folding products such as instruction, propaganda poster and various folding products with different sizes;
Book-like products such as instruction, card book, notebook, cartoon book, magazine and various book-like products with different sizes, the machine can automatically separate them and convey them to the conveyor belt one by one.
It can not only be used in counting as scorecard separately, but also can be integrated into related equipments as automatic scorecard to cooperate with various kinds of packaging line such as pillow type packaging machine, vertical packaging machine, automatic conveyor, automatic shrink packaging machine and etc.

★Features:

- 1.Servo motor drive system, PLC controller and touch interface are easily handled and utilized. Both settings and operation can be easily completed on the touch screen. Meanwhile, with storage function, it can automatically operate when relevant data is set.
- 2.Servo motor's highest speed reaches 50m/minute.
- 3.Automatic card sender joints the full-automatic packing machine and automatically send cards according to different packaging quantity in a fast speed.
- 4.Automatic alarming function works when card misses or there is no card. Its function of sending single card, several cards or continuous cards can be chosen.
- 5.It adopts photoelectric control. It can automatically send cards when the general power switch is turn on with photoelectric sensor.
- 6.It is matched automated packaging equipment, realizing integration of automatic packaging genuinely.
- 7.The system itself has many function settings, including pretest card length, setting of card quantity each time, automatically stopping working and giving an alarm when there are double card or no card, with real time on-line monitoring.
- 8.Its structure is reasonably designed and can change quick-wear parts in a simple and quick way.

FK-100自动发卡机/自动分卡机

FK-100 Automatic Card Sender/Automatic Card Machine



★技术参数 (Technical parameters) :

机型 (Model)	FK-100
发卡速度 (Speed of sending cards)	500张/每分钟 (与卡片尺寸有关) 500 pieces/minute(related to card's size)
发卡厚度 (Thickness of sending cards)	0.1mm-3mm
发卡尺寸 (Size of sending cards)	发卡长度：45-120 mm (可依需求订制) 发卡宽度：40-100 mm (可依需求订制) Sending card's length: 45-120 mm (can be customized according to requirements) Sending card's width: 40-100 mm (can be customized according to requirements)
动力控制系统 (Power control system)	伺服电机启动PLC控制 Servo motor drive PLC control
电源及功率 (Voltage and power)	220V/450W
外形尺寸 (Boundary dimension)	约 (长)612×(宽)400×(高)597mm About(length)612×(width) 400×(height) 597mm
机器重量 (Weight)	约25公斤 About 25kg



FK-300自动发卡机/自动分卡机

FK-300 Automatic Card Sender/Automatic Card Machine



★性能特点：

- 1.伺服电机驱动系统，PLC控制器以及触控界面，操作简单易用。各种设置、操作均可在触摸屏上轻松完成，同时具有储存功能，设置好相关数据开机自动操作。
- 2.伺服电机最高速度可达到50米/分钟。
- 3.自动发卡机对接全自动包装机，根据不同的包装数量快速自动发卡。
- 4.漏卡、无卡自动报警功能，可选择发单张、多张及连续发卡功能。
- 5.采用光电控制，开启总电源开关后，光电感应，自动发卡。
- 6.与自动化包装设备的匹配，真正实现一体化自动包装。
- 7.系统本身带有多项功能设定，包括预发卡长度、每次设定发卡数量、重卡无卡时有自动停机报警等功能，实时在线控。
- 8.结构设计合理，更换易损件简单快捷。



★应用范围：

本产品将整叠片状产品如：明信片、贺卡、挂牌、包装袋、未成形纸盒、标签、信封、红包等；
折叠状产品如：说明书、宣传海报及各种不同尺寸的折叠状产品；
本状产品如：说明书、卡片书、笔记本、动漫小书、杂志及各种不同尺寸的本状产品，自动分开，成单个传送到输送带上。它既能够单独作分卡计数使用，亦可以轻松地整合到相关联的设备中作自动分卡、配合各种自动包装线使用例如：枕式包装机、立式包装机、自动输送机、自动收缩包装机等。

★Applications：

A whole stack of sheeted products such as postcard, greeting card, hangtag, packaging bag, unformed box, label, envelope, red envelope and etc;
Folding products such as instruction, propaganda poster and various folding products with different sizes;
Book-like products such as instruction, card book, notebook, cartoon book, magazine and various book-like products with different sizes, the machine can automatically separate them and convey them to the conveyor belt one by one.
It can not only be used in counting as scorecard separately, but also can be integrated into related equipments as automatic scorecard to cooperate with various kinds of packaging line such as pillow type packaging machine, vertical packaging machine, automatic conveyor, automatic shrink packaging machine and etc.

★Features:

- 1.Servo motor drive system, PLC controller and touch interface are easily handled and utilized. Both settings and operation can be easily completed on the touch screen. Meanwhile, with storage function, it can automatically operate when relevant data is set.
- 2.Servo motor's highest speed reaches 50m/minute.
- 3.Automatic card sender joints the full-automatic packing machine and automatically send cards according to different packaging quantity in a fast speed.
- 4.Automatic alarming function works when card misses or there is no card. Its function of sending single card, several cards or continuous cards can be chosen.
- 5.It adopts photoelectric control. It can automatically send cards when the general power switch is turn on with photoelectric sensor.
- 6.It is matched automated packaging equipment, realizing integration of automatic packaging genuinely.
- 7.The system itself has many function settings, including pretest card length, setting of card quantity each time, automatically stopping working and giving an alarm when there are double card or no card, with real time on-line monitoring.
- 8.Its structure is reasonably designed and can change quick-wear parts in a simple and quick way.

FK-300自动发卡机/自动分卡机

FK-300 Automatic Card Sender/Automatic Card Machine



★技术参数 (Technical parameters)：

机型 (Model)	FK-300
发卡速度 (Speed of sending cards)	500张/每分钟 (与卡片尺寸有关) 500 pieces/minute(related to card's size)
发卡厚度 (Thickness of sending cards)	0.1mm-3mm
发卡尺寸 (Size of sending cards)	发卡长度：50-300 mm (可依需求订制) 发卡宽度：110-300 mm (可依需求订制) Sending card's length: 50-300 mm (can be customized according to requirements) Sending card's width: 110-300 mm (can be customized according to requirements)
动力控制系统 (Power control system)	伺服电机启动PLC控制 Servo motor drive PLC control
电源及功率 (Voltage and power)	220V/450W
外形尺寸 (Boundary dimension)	约 (长)620×(宽)670×(高)700mm About(length)620×(width) 670×(height) 700mm
机器重量 (Weight)	约35公斤 About 35kg





单款印刷品点数收集系统



多款产品混装配款方案

FK-420自动发卡机/自动分卡机

FK-420 Automatic Card Sender/Automatic Card Machine

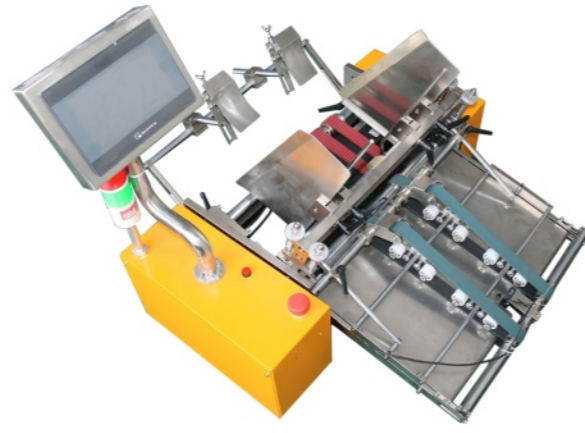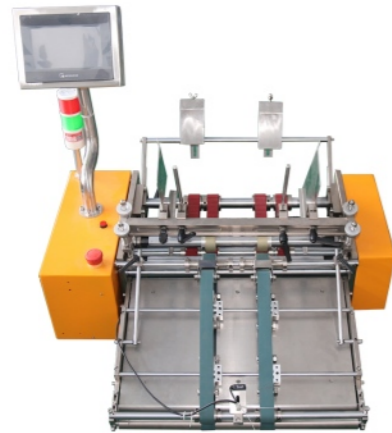

★性能特点：

- 1.伺服电机驱动系统，PLC控制器以及触控界面，操作简单易用。各种设置、操作均可在触摸屏上轻松完成，同时具有储存功能，设置好相关数据开机自动操作。
- 2.自动发卡机对接全自动包装机，根据不同的包装数量快速自动发卡。
- 3.漏卡、无卡自动报警功能，可选择发单张、多张及连续发卡功能。
- 4.与自动化包装设备的匹配，真正实现一体化自动包装。
- 5.系统本身带有多项功能设定，包括预发卡长度、每次设定发卡数量、重卡无卡时有自动停机报警等功能，实时在线控。

★Features:

- 1.Servo motor drive system, PLC controller and touch interface are easily handled and utilized. Both settings and operation can be easily completed on the touch screen. Meanwhile, with storage function, it can automatically operate when relevant data is set.
2. Automatic card sender joints the full-automatic packing machine and automatically send cards according to different packaging quantity in a fast speed.
3. Automatic alarming function works when card misses or there is no card. Its function of sending single card, several cards or continuous cards can be chosen.
4. It is matched automated packaging equipment, realizing integration of automatic packaging genuinely.
5. The system itself has many function settings, including pretest card length, setting of card quantity each time, automatically stopping working and giving an alarm when there are double card or no card, with real time on-line monitoring.

★技术参数 (Technical parameters) :

机型 (Model)	FK-420
生产速度	单张最快200张/分钟
要求发放的卡片尺寸范围	300-420mm
总功率	450W
电源	110/220V
外形尺寸	(长) 740× (宽) 670× (高) 700mm
整机重量	40KG

★应用范围：


自动分卡机作为一款配套设备，广泛应用于包装印刷行业，发卡机/分卡机既能够单独作为分卡点数使用，也可以轻松配合各种包装机械设备（如：枕式包装机、立式包装机、封箱机、热收缩包装机等）在生产流水线、包装线上做发卡点数使用，满足日常所需的自动化包装解决方案。

★Applications :

A whole stack of sheeted products such as postcard, greeting card, hangtag, packaging bag, unformed box, label, envelope, red envelope and etc;
Folding products such as instruction, propaganda poster and various folding products with different sizes;
Book-like products such as instruction, card book, notebook, cartoon book, magazine and various book-like products with different sizes, the machine can automatically separate them and convey them to the conveyor belt one by one.
It can not only be used in counting as scorecard separately, but also can be integrated into related equipments as automatic scorecard to cooperate with various kinds of packaging line such as pillow type packaging machine, vertical packaging machine, automatic conveyor, automatic shrink packaging machine and etc.

FK-600自动发卡机/自动分卡机

FK-600 Automatic Card Sender/Automatic Card Machine

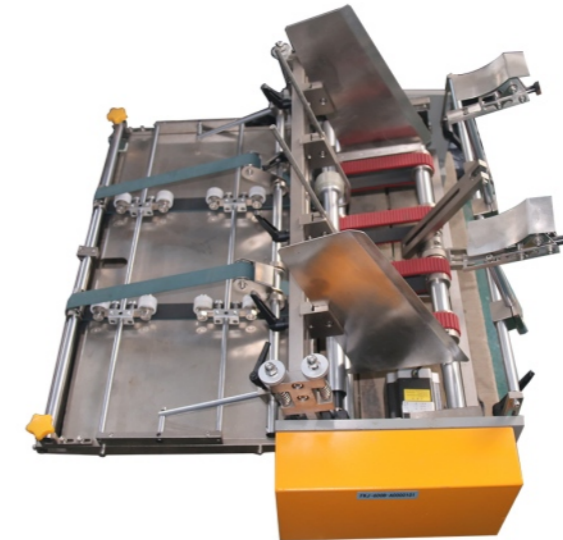

★性能特点：

- 1.系统本身带有多项功能设定，包括预发卡长度，每次发卡数量等功能，实时在线控制。
- 2.结构设计合理，更换易损件简单快捷。
- 3.有信号延时功能，当包装机速度发生改变时，直接在触摸屏设置，无需改变发卡机位置。

★Features:

- 1.The system has many function settings in itself, including card lead length, card quantity each time to send.
- 2.It will automatically pause and alarm when cards overlapped or missed, which realizes that of the real time on-line monitoring .
- 3.Reasonably designed in structure and consumables replacement could be so easy and quick.

★应用范围：

可用于将整叠片状产品（如：兑奖卡、合格证、卡片、游戏卡、明信片、贺卡、吊牌、挂牌、包装袋、未成形纸盒、标签、信封、红包、A4纸、保修卡等）、折叠状产品（如：说明书、宣传海报及各种不同尺寸的折叠状产品）、本状产品（如：说明书、卡片书、笔记本、动漫小书、杂志及各种不同尺寸的本状产品）自动分开，成单个传送到输送带上。它既能够单独作分卡计数使用，亦可以轻松整合到相关联的设备中作自动分卡计数使用，也可以配合各种包装设备在包装线上使用，如：枕式包装机、立式包装机、封箱机、自动输送机、自动收缩包装机等。

★Applications :

A whole stack of sheeted products such as postcard, greeting card, hangtag, packaging bag, unformed box, label, envelope, red envelope and etc;
Folding products such as instruction, propaganda poster and various folding products with different sizes;
Book-like products such as instruction, card book, notebook, cartoon book, magazine and various book-like products with different sizes, the machine can automatically separate them and convey them to the conveyor belt one by one.
It can not only be used in counting as scorecard separately, but also can be integrated into related equipments as automatic scorecard to cooperate with various kinds of packaging line such as pillow type packaging machine, vertical packaging machine, automatic conveyor, automatic shrink packaging machine and etc.

★技术参数 (Technical parameters) :

机型 (Model)	FK-600
投卡速度	200 张/每分钟
卡片厚度	1-3mm
卡片尺寸范围	长：60-500mm宽：200-600mm (可依需求订制)
总功率	750W
电源	220V
外形尺寸	约 (长) 920× (宽) 1026× (高) 708mm
整机重量	约 65KG

CFZD-30-35E 高速自动装袋机/套袋机

SELF-ADHESIVE BAG PACKING MACHINE



★性能特点：

- 1、多功能装袋机,结构新颖,功能多样,省人省时省力;
- 2、多伺服控制,可实现多功能的快速切换,机器调试方便快捷,性能卓越;
- 3、独创的平口袋热封技术,更大的满足客户对装袋的品质和不同功能的要求;
- 4、成品自动输送和点数功能,节省了大量人力点数和人手不够的问题,自动化整合程度更高;
- 5、温度独立PID智能控制,控温稳定,更好适合各种包装材料;
- 6、彩色触摸屏,参数设定方便快捷。
- 7、吸盘取袋,改变袋宽,只需要调试三个袋子
- 8、先贴标后入袋,误差2mm以内,标不会斜
- 9、尾架加长,可增加多个贴标机

★Features:

1. CFZD30-35 multi-function bagging machine, with new structure and diverse functions, saving time and labour;
2. Multi-servo control which enables multi-function fast switching. The machine features debugging convenience and high performance;
3. The original flat-bag heat sealing technology which meets the customer requirements for the quality of bags and different functions to a greater extent;
4. Finished product automatic transmission and counting function, a lot of manpower is saved, the problem of manpower shortage is solved, to reach a higher degree of automation integration;
5. Temperature independent PID intelligent control. Temperature stability, better for a variety of packaging materials;
6. Color touch screen, easy and quick setting.
7. With the function of film bag feeding by sucker, the bag waste amount of debugging for bag length change will be limited in 3 bags
8. Labeling before bag feeding with a tolerance in 2mm, and no crookedness
9. Extended conveyor allows a multiple labelers' assembly



★应用范围：

本设备目前主要的包装对象为有规则的片状产品及印刷品,如卡片、红包、说明书、文件袋、文件夹、纸张、保修卡、书、挂历、日历、便签、儿童书、杂志、信封、贺卡、挂牌、笔记本、明信片、彩页、请柬等产品。

★Applications:

Regular sheet products are the main packaging objects of this equipment. Such as cards, red envelopes, brochures, paper bags, warranty cards, envelopes, greeting cards, hangtag, notebooks, postcards, tag and other products.

优势 Advantages

- 1、可选择自粘封口和热切三边封两种封口方式;
- 2、自动纠偏功能,降低包装产品损耗;
- 3、袋宽指定范围内随意调节,多种规格产品一台设备通用;
- 4、配置一件复位功能与双向操作控制位,生产调试更便捷;
- 5、点数记忆功能,点数准确无误,方便包装后收集装箱;
- 6、培训——专业工程师免费培训使用,教会为止;
- 8、售后服务完善——整机一年免费保修、终身维护,24小时内解决问题
- 9、设备性能稳定耐用,正常使用寿命10年。
- 10、吸盘取袋,调试方便,改变袋宽,只需要调试三个袋子
- 11、先贴标后入袋,误差2mm以内,标不会斜
- 12、尾架加长,可增加多个贴标机

1. The two ways of self-adhesion sealing and hot-cutting three-side sealing are selectable;
2. Having automatic skew detection function, which reduces product packing wastage;
3. Capable of voluntary accommodation within bag-width designated range, as enables multi-specification products to be universal for one equipment unit;
4. Fitted with one-key reset function and double-direction operation control bit, leading to more convenient production debugging;
5. Possessing count memory function with precise calculation, as helps after-package collection and box-loading;
6. Coach-free operation coach from professional engineers, as continues until operation mastery;
8. Perfect after-sale service--one-year-long complete machine free repair and life-long maintenance, problem solution achieved within 24 hours;
9. Having stable performance in enduring use, average working life being 10 years.
10. With the function of film bag feeding by sucker, the bag waste amount of debugging for bag length change will be limited in 3 bags
11. Labeling before bag feeding with a tolerance in 2mm, and no crookedness
12. Extended conveyor allows a multiple labelers' assembly

产品规格及技术参数 Product specifications and technical parameters

项目	说明	
包装材料	OPP、CPP、PP、PE料;要求成卷使用,内轴直径为75mm;膜表面要求平整,边缘不起波浪型,色标与包装膜底色要求对比明显。(材料不能太脆)	
装袋宽度尺寸	100mm-280mm	
装袋最大长度	100-300mm	
包装产品高度	1---10mm(硬质卡片类)根据样品(超高特制机)	
装袋速度	40-60袋/分钟(袋长与袋宽,产品高度决定)	
卷膜厚度	0.03-0.05mm	
卷膜外径	最大≤450mm	
卷膜	需对折,留舌口(可以平口)带自动纠偏	
舌口长度	≤30mm另根据产品高度	
能源要求	电源	380V、50HZ 13KW
气源压力	0.6MP≤压力≤0.8MP mm	
外部	占地尺寸	高800mm长5000mm×宽4000mm
	操作高度	800mm

项目Item	说明Description	
Packaging Materials	OPP, CPP, PP, PE materials; it is required to be used in coils, and the diameter of inner shaft is 75mm; the surface of the film should be flat, the edge should not be wavy, and the color code should be consistent with the package. The film background color should be obvious. (material should not be too brittle)	
Width Size of Bagging	100mm-280mm	
Maximum Length of Bagging	100-300mm	
The height of packing products	1-10mm (hard cards) according to the sample (super high special machine)	
Packing Speed	40-60 package/Minute (Determined by bag length and bag width)	
Film Thickness	0.03-0.05mm	
Film Outer Diameter	Maximum ≤450mm	
Roll film	Need to fold in half, leave tongue mouth (can be flat mouth) with automatic correction	
Tongue length	≤30mm (Determined by bag length and bag width)	
Energy Roll film	Power Supply	380V, 50Hz 13KW
Air Pressure	0.06MP≤Air Pressure≤0.08MP	
External	Overall Dimension	Length5000mm×Width4000mm
	Operation height	800mm



CFZD35-48自动装袋机/套袋机

SELF-ADHESIVE BAG PACKING MACHINE



★性能特点：

1. 多功能装袋机,结构新颖,功能多样,省人省时省力;
2. 多伺服控制,可实现多功能的快速切换,机器调试方便快捷,性能卓越;
3. 独创的平口袋热封技术,更大的满足客户对装袋的品质和不同功能的要求;
4. 成品自动输送和点数功能,节省了大量人力点数和人手不够的问题,自动化整合程度更高;
5. 温度独立PID智能控制,控温稳定,更好适合各种包装材料;
6. 彩色触摸屏,参数设定方便快捷。
7. 吸盘取袋,改变袋宽,只需要调试三个袋子
8. 先贴标后入袋,误差2mm以内,标不会斜
9. 尾架加长,可增加多个贴标机

★Features:

1. CFZD30-35 multi-function bagging machine, with new structure and diverse functions, saving time and labour;
2. Multi-servo control which enables multi-function fast switching. The machine features debugging convenience and high performance;
3. The original flat-bag heat sealing technology which meets the customer requirements for the quality of bags and different functions to a greater extent;
4. Finished product automatic transmission and counting function, a lot of manpower is saved, the problem of manpower shortage is solved, to reach a higher degree of automation integration;
5. Temperature independent PID intelligent control. Temperature stability, better for a variety of packaging materials;
6. Color touch screen, easy and quick setting.
7. With the function of film bag feeding by sucker, the bag waste amount of debugging for bag length change will be limited in 3 bags
8. Labeling before bag feeding with a tolerance in 2mm, and no crookedness
9. Extended conveyor allows a multiple labelers' assembly



★应用范围：

本设备目前主要的包装对象为有规则的片状产品及印刷品,如卡片、红包、说明书、文件袋、文件夹、纸张、保修卡、书、挂历、日历、便签、儿童书、杂志、信封、贺卡、挂牌、笔记本、明信片、彩页、请柬等产品。

★ Applications :

Regular sheet products are the main packaging objects of this equipment. Such as cards, red envelopes, brochures, paper bags, warranty cards, envelopes, greeting cards, hangtag, notebooks, postcards, tag and other products.

优势 Advantages

1. 可选择自粘封口和热切三边封两种封口方式;
2. 自动纠偏功能,降低包装产品损耗;
3. 袋宽指定范围内随意调节,多种规格产品一台设备通用;
4. 配置一件复位功能与双向操作控制位,生产调试更便捷;
5. 点数记忆功能,点数准确无误,方便包装后收集装箱;
6. 培训--专业工程师免费培训使用,教会为止;
8. 售后服务完善--整机一年免费保修、终身维护,24小时内解决问题
9. 设备性能稳定耐用,正常使用寿命10年。

1. The two ways of self-adhesion sealing and hot-cutting three-side sealing are selectable;
2. Having automatic skew detection function, which reduces product packing wastage;
3. Capable of voluntary accommodation within bag-width designated range, as enables multi-specification products to be universal for one equipment unit;
4. Fitted with one-key reset function and double-direction operation control bit, leading to more convenient production debugging;
5. Possessing count memory function with precise calculation, as helps after-package collection and box-loading;
6. Coach--free operation coach from professional engineers, as continues until operation mastery;
8. Perfect after-sale service--one-year-long complete machine free repair and life-long maintenance, problem solution achieved within 24 hours;
9. Having stable performance in durand use, average working life being 10 years.

产品规格及技术参数 Product specifications and technical parameters

项目	说明	
包装材料	OPP、CPP、PP料;要求成卷使用,内轴直径为75mm;膜表面要求平整,边缘不起波浪型,色标与包装膜底色要求对比明显。	
装袋宽度尺寸	100mm-320mm(定制)	
装袋最大长度	480mm	
包装产品高度	1---12mm	
装袋速度	10-20袋/分钟(袋长与袋宽决定)	
卷膜厚度	0.025-0.07mm	
卷膜外径	最大≤450mm	
卷膜	需对折,留舌口	
舌口长度	≤30mm另跟据产品高度	
能源要求	电源	380V、50HZ 15KW
气源压力	0.6MP≤压力≤0.8MP mm	
外部	占地尺寸	长6000mm×宽4000mm
	操作高度	800mm

项目Item	说明Description	
Packaging Materials	OPP, CPP, PP material; it requires the use of a roll, the inner shaft diameter of 75mm; the film surface is required to be flat, the edge should not be wave-shaped, contrast of color scale and packaging film background color is required to be obvious.	
Width Size of Bagging	100mm-320mm	
Maximum Length of Bagging	480mm	
The height of packing products	1-12mm	
Packing Speed	10-20 package/Minute (Determined by bag length and bag width)	
Film Thickness	0.025-0.07mm	
Film Outer Diameter	Maximum ≤450mm	
Roll film	Need to fold in half,keep the tongue	
Tongue length	≤30mm (Determined by bag length and bag width)	
Energy Roll film	Power Supply	380V, 50Hz 15KW
Air Pressure	0.06MP≤Air Pressure≤0.08MP	
External	Overall Dimension	Length6000mm×Width4000mm
	Operation height	800mm