




## Resilient Seated Gate valve

### ■ Technical Data

Design standard	EN1171	DN	50~400
Flange standard	/	PN	1.0/1.6/2.5 MPa
Face to face standard	EN558-1 Series 15	Working temp.	NBR≤80°C/EPDM≤120°C
Testing standard	EN1074-2	Drive Mode	Hand wheel/Cap/Gearbox/Electric Actuator
Body	GGG50/GJS500-7	Connecting	Socket
Sealing	Rubber	Coating	Epoxy

### ■ With socket ends: DN50-DN400

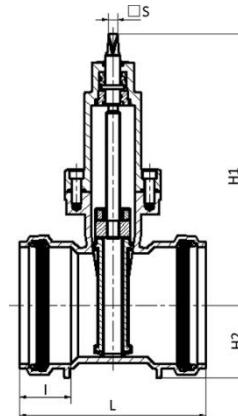

### ■ Dimensions Data(mm) (DN50~DN400)

DN	Outside diameter of the pipe	L	I	H1	H2	□S	Weight (Kg)
50	64	250	72	260	49	14	13
65	76	270	86	270	53	17	15
80	90	280	96	310	66	17	18
100	110	300	100	354	76	19	23
150	160	350	115	464	105	19	39
175	200	400	120	464	128	19	51
200	225	400	130	565	140	24	62
250	282	450	124	666	175	27	108
300	315	500	160	765	192	27	145
400	403	600	155	945	242	32	268