




Resilient Seated Gate Valve With Signal

■ Technical Data

Design standard	EN1171	DN	50~600
Flange standard	EN1092-2	PN	1.0/1.6 MPa
Face to face standard	EN558-1 Series14/15 or BS5163	Working temp.	NBR≤80℃/EPDM≤120℃
Testing standard	EN1074-2	Drive Mode	Hand wheel/Cap/Gearbox/Electric Actuator
Body	GGG50/GJS500-7	Connecting	Flange
Sealing	Rubber	Coating	Epoxy

■ With signal: DN50-DN600 PN10/16

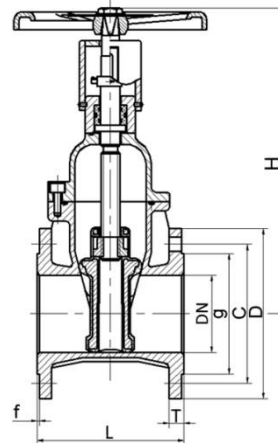

■ Dimensions Data(mm) (DN50~DN600)

DN	L		H	W	Flange dimensions to DIN2501								Weight(Kg)				
					D		C		g		f	T		n-d		F4	
	PN10	PN16			PN10	PN16	PN10	PN16	PN10	PN16		PN10	PN16	PN10	PN16	PN10	PN16
50	150	250	260	250	165	125	99	3	19	4-19	14.3	17					
65	170	270	270	250	185	145	118	3	19	4-19	17	19.8					
80	180	280	310	250	200	160	132	3	19	8-19	19	25					
100	190	300	354	250	220	180	156	3	19	8-19	26.5	32					
125	200	325	405	350	250	210	184	3	19	8-19	35	42					
150	210	350	464	350	285	240	211	3	19	8-23	41	49					
200	230	400	565	350	340	295	266	3	20	8-23 12-23	65	65	75	78			
250	250	450	666	500	395	405	350	355	3	22	12-23 12-28	105	107	112	119		
300	270	500	765	500	445	460	400	410	4	24.5	12-23 12-28	175	180	190	200		
350	290	550	870	500	505	520	460	470	4	24.5 26.5	16-23 16-28	210	219	220	229		
400	310	600	945	640	565	580	515	525	4	24.5 28	16-28 16-31	242	255	290	300		
450	330	650	1080	640	615	640	565	585	4	25.5 30	20-28 20-31	350	365	385	400		
500	350	700	1150	640	670	715	620	650	4	26.5 31.5	20-28 20-34	428	450	512	530		
600	390	800	1345	640	780	840	725	770	5	30 36	20-31 20-37	735	775	830	860		