

PREMIUM RESIDENTIAL LAMINATE FLOORING







REAL HARDWOOD VENEER

The wear layer is a piece of authentic natural hardwood. Wood material inherently contains differences in color, texture and grain. Therefore, every plank is unique and no two pieces will ever be the same.

COMMERCIAL GRADE FINISH

High performance finish is ideally suited for high traffic commercial areas, thanks to the abrasion resistant and anti-microbial properties. Your durable floor will remain beautiful even in demaning applications.

HIGH IMPACT RESISTANCE

The density of our core is even greater than those of solid hardwood. Combine that with the strong finish on top you get a product that can handle impacts from almost any everyday items.

SUPER HIGH HARDNESS FOR WIDE APPLICATIONS

Our unique technology allows the core area to be even denser than solid hardwood, combined with a firm surface finish that will not leave marks even when impacted by high heels, hard objects.

ECO-FRIENDLY

Every style is made with high grade raw materials harvested from sustainable forests to comply with strict environmental protection requirements. No VOC's (Volatile Organic Compounds) or solvents are used.

EASY INSTALLATION WITH UNILIN

Unilin patented locking system allows two panels to connect securely together without the need for any nail, staple or glue. Installing flooring has never been easier.

WATERPROOF CORE

The patented waterproof HDF layer completely blocks water and moisture, preventing erosion and damage. The balanced backer and sealed edges also do an excellent job of keeping water out and preventing damages.





25 26

Superior Engineered Construction








TECLIC premium residential laminate flooring is made up of the best wood raw materials, ultra dense water-proof core,9 layer & 3 coat UV cured finishing system, and balance layer or cork / foam as underlayment.

The result is an extremely durable floor that also offers living comfort.

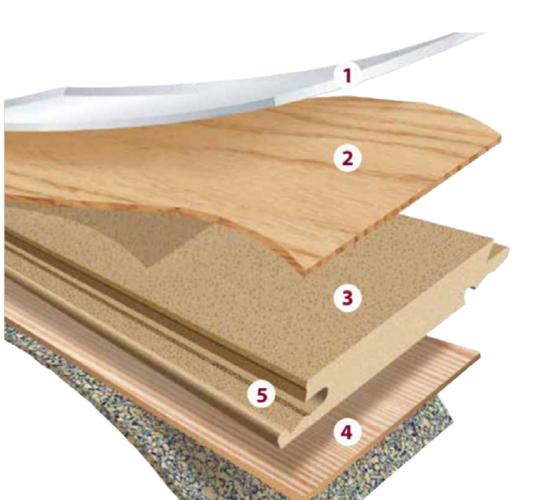

- Commercial Grade Finish
 (Treffert High Performance UV Cured Coating)
- 2. Real wood Layer
- Smart Waterproof Core
 (EPA & CARBII HDF Made With D4 Rated NAUF Glue)
- 4. Balance Layer
- Uniclic Joint (nail & adhesive free)

Technical Specifications

Profile

Uniclic Joint | Tongue&Groove







Wood Species

White Oak | American Black Walnut | Hickory | Acacia

Length

Radom 400/600/800/1200mm (70% 1200mm) or Fixed 1200mm or others

Width

86mm/93mm/127mm or others

Thickness

HDF core: 8mm/10mm/12mm

Top wood veneer: 0.6mm/1.2mm/2mm/2.5mm/3mm

Finish

Open Grain | Brushed | Smooth | Handscraped



Colors









































H2219 Acacia

H2201-H2218, H2220-H2222 White Oak



