



Jiangsu Easy Snow International Trading Co., Ltd

Company's Profile



Jiangsu **Easy Snow** International Trading Co., Ltd. is the Global leading **COLD STORAGE** and refrigeration equipment trader, committed to providing worldwide clients with the best quality cold room solutions. “**Qingbai**” belongs to the company's refrigeration brand, “**Qingbai**” in ancient Chinese words is the meaning of “**SNOW**”, on behalf of the company's original intention as simple as snow, pure. Our company has rich project experience in refrigeration industry, and have studied and cooperated with international famous engineering school- Hohai University in engineering projects. Main products: **cold storage , refrigeration equipment, solar cold storage, evaporation equipment, condensing unit, cold room doors, PU panels**, etc. No matter now or in the future, we will always follow the principle of “**Efficiency is life, Quality is fundamental**”, emphasize the concept of talent and science and technology, and take the road of innovative development with greater challenges.

COLD STORAGE

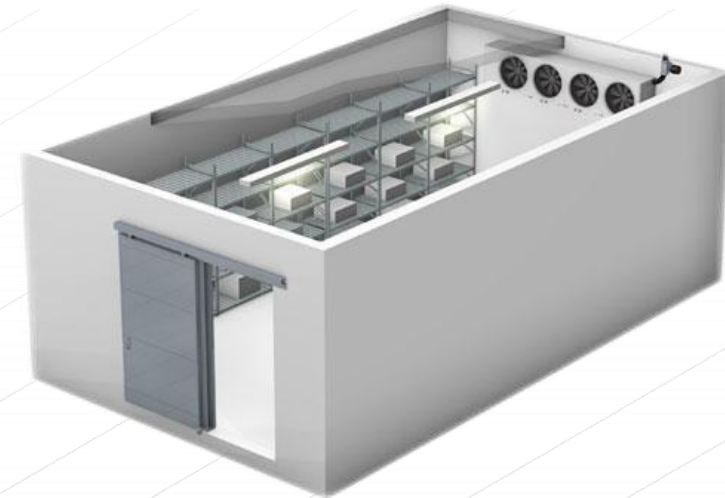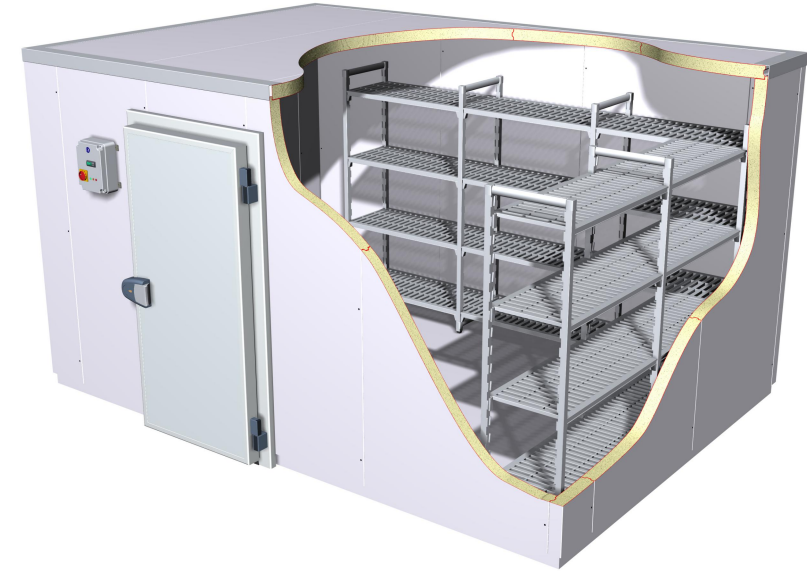

COLD STORAGE/COLD ROOM/FREEZER/CHILLER/BLASTING ROOM

EVAPORATOR



Ordinary style



Two side air style



with Air duct style



Polyurethane cold storage panel

Thickness	Upper layer: 0.4~0.8mm					
	50mm	75mm	100mm	120mm	150mm	200mm
	Bottom layer: 0.4-0.8mm					
Surface material	PPGI,GI,Stainless Steel,Embossed Aluminium					
Temperature range	≥0 °		-18 °≤x≤0 °		≤-18 °	
Color	Common white gray ,other RAL color is avaiable					
Density	40±2kg/m3		Fir resistance grage		B2	
Thermal conductivity	≤0.024W/(m.K)		Compressive strength		≥160kpa	



Polyurethane cold storage panel (MOQ ≥500m2)

Thickness	Upper layer: 0.4-0.8mm		
	50-250mm		
	Bottom layer: 0.4-0.8mm		
Surface material	PPGI,GI,Stainless Steel,Embossed Aluminium		
Temperature range	$-35^{\circ}\leq x\leq 16^{\circ}$		
Color	Common white gray ,other RAL color is avaiable		
Density	PIR:45±2kg/m3 ; PU:40±2kg/m3	Fir resistance grage	PIR:B1; PU:B2
Thermal conductivity	≤0.024W/(m.K)	Compressive strength	≥160kpa

COLD ROOM DOOR-hinged




COLD ROOM DOOR-Hinged door

Thickness	100MM/150MM		
Surface material	PPGI,Stainless Steel		
Application	CHILLER ROOM/FREEZER ROOM/BLASTING ROOM		
Color	Common white gray ,other RAL color is avaiable		
Density	40±2kg/m3	Open method	Single/Double open
kinds of hinded door	Half buried door、 Full buried door		

COLD ROOM DOOR-sliding door






Cold storage sliding door

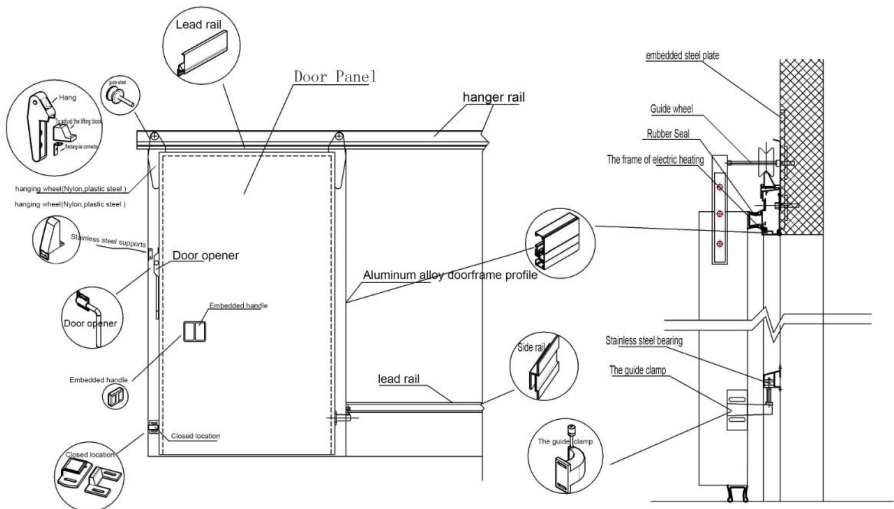




COLD ROOM DOOR-Sliding door

Thickness	100MM/150MM		
Surface material	PPGI,Stainless Steel		
Application	CHILLER ROOM/FREEZER ROOM/BLASTING ROOM		
Color	Common white gray ,other RAL color is avaiable		
Density	40±2kg/m3	Open method	Single/Double open

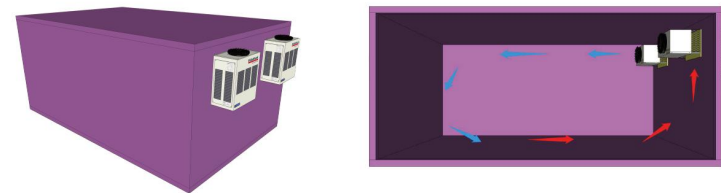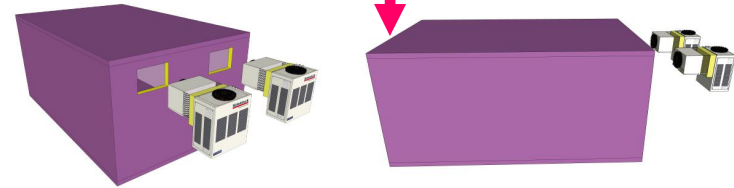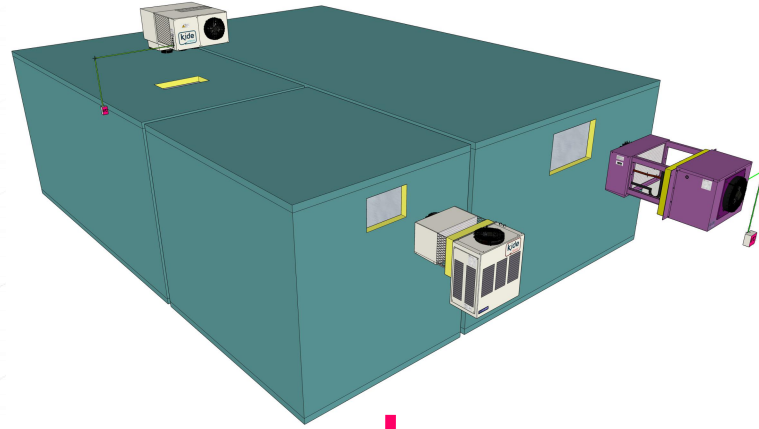MONOBLOCK



0 °C ~ -10 °C	Series 系列	Modelo Model 型号	Potencia frigorífica Refrigeration capacity 制冷量	 °C EXT	 °C EXT		Compresor Compressor 压缩机	R-404A Kg 制冷剂 充注量	Intensidad nominal Nominal consumption 额定电流	Intensidad absorc. max. Max. load current 最大电流	Caudal Flow 风量 condens. evapora. 冷凝-蒸发	Kg 重量	
			W	m³	m³	电压	马力/HP	kW	A	A	m³/h		
			0 °C										
0 °C ~ -10 °C	100	EMB1006M1Z	1205	9	7	220/1/50	1/2	0.4	<1	5.1	6.1	1100-880	65
		EMB1007M1Z	1395	12	9	220/1/50	3/4	0.5	<1	5.7	6.8	1100-880	65
	200	EMB2010M1Z	2011	20	17	220/1/50	1 1/4	0.9	<1.5	7.2	8.7	1920-1760	95
		EMB2015M5Z	2309	29	21	380/3/50	1 1/2	1.1	<1.5	4.1	4.8	1920-1760	95
	300	EMB3017M5Z	3162	37	30	380/3/50	1 3/4	1.3	<2	4.1	4.9	1920-1920	100
		EMB3020M5Z	4107	45	37	380/3/50	2	1.5	<2	5.1	6.2	1920-1920	100

-25 °C ~ -15 °C	-20 °C	EMB1010L1Z	940	6	4	220/1/50	1	0.7	<1	5.2	6.3	1100-880	70
		EMB1015L1Z	1200	9	6	220/1/50	1 1/2	1.1	<1	5.5	7.5	1100-880	70
	200	EMB2015L1Z	1280	11	8	220/1/50	1 1/2	1.1	<1.5	6.8	8.3	1920-1760	100
		EMB2017L5Z	1434	15	10	380/3/50	1 3/4	1.3	<1.5	3.8	4.5	1920-1760	100
	300	EMB3017L5Z	1621	22	15	380/3/50	2	1.5	<2	3.4	4.1	1920-1920	105
		EMB3020L5Z	2513	27	19	380/3/50	2 1/2	1.8	<2	5.0	6.0	1920-1920	105



PARALLEL COMPRESSORS



SEMI-HERMETIC
COMPRESSORS



2-STAGE SEMI-HERMETIC
COMPRESSORS

BITZER BRAND



Indoor Scroll Condensing Units for Refrigeration



Emerson Copeland
BRAND

ZX Condensing Unit



Fractional HP Condensing Units



Compressor-Screw machine



Bitzer screw unit (75HPX2) -
siphon oil cooling




Fusheng screw machine
(50HPX2)- air cooling










Refcomp screw unit
(80hpx2)- water cooling


Solar Cold storage

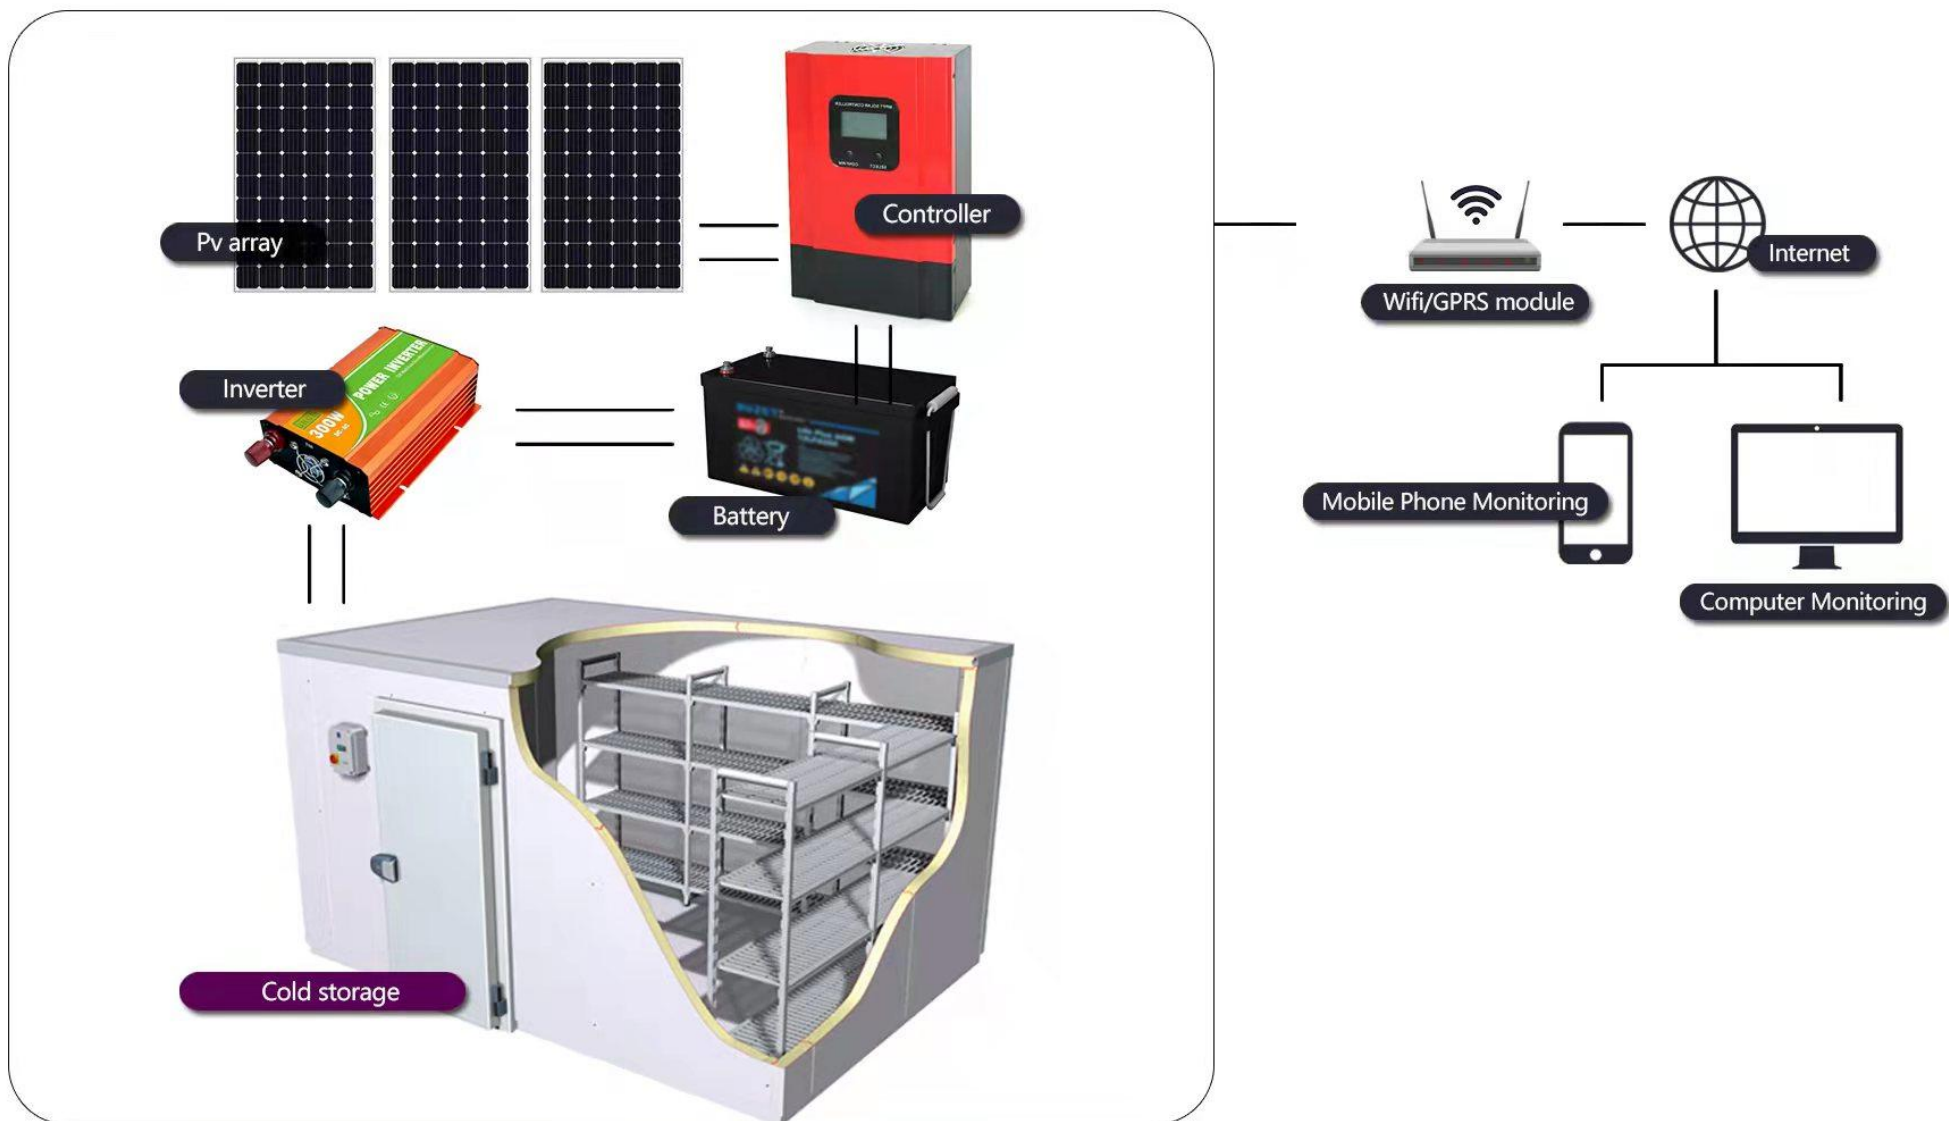


Walk in Cooler with Glass Doors

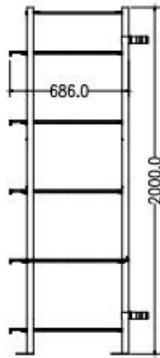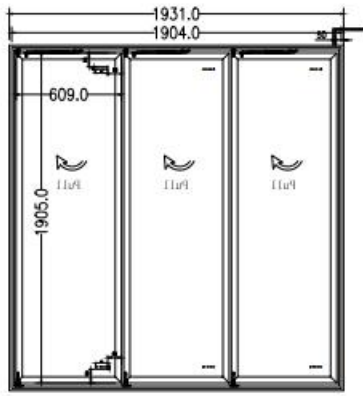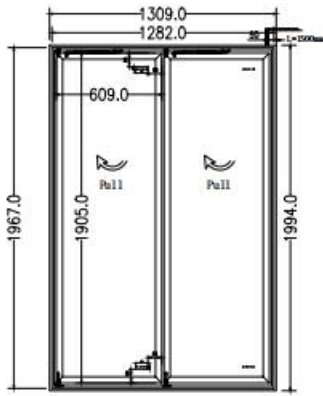


No.1 -02-A
CD-01
No.1 -02-A

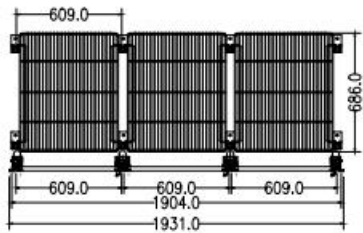

No.2 -03-A
CD-01




№ 2 - 03-А



Cold room accessories



Cold Room Accessories
Soğuk Oda Aksesuarları

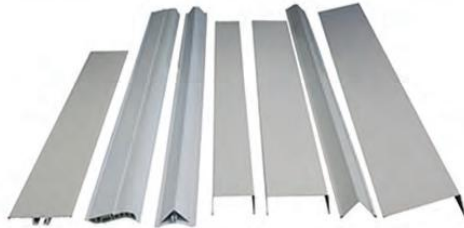

Hygienic Corner Accessories
Hijyenik Köşe Aksesuarları



Hygienic Interior Accessories
Hijyenik İç Aksesuarları



Ceiling Hanger Accessories
Tavan Asa Aksesuarları



Blasting freezer





Flat plate freezer



Net belt freezer


Single spiral/double spiral freezer

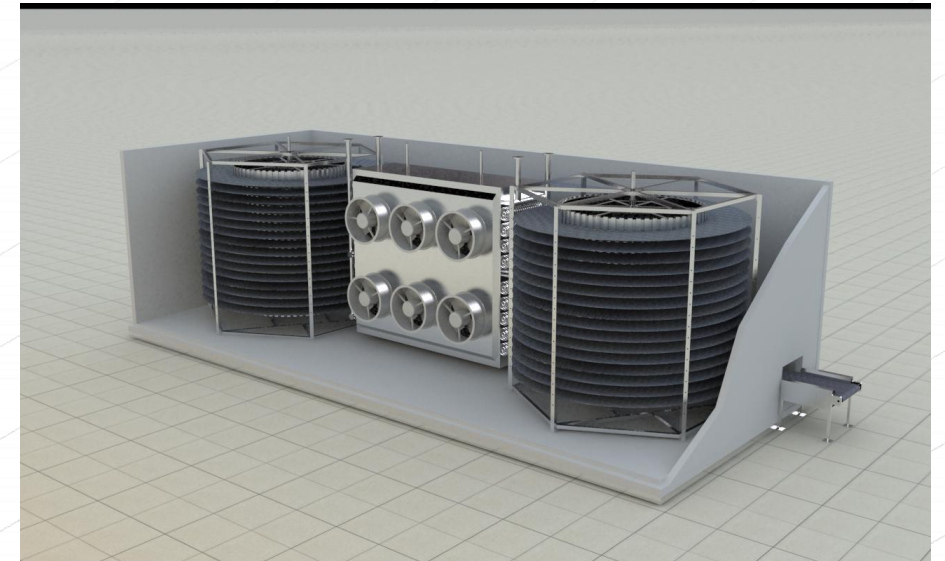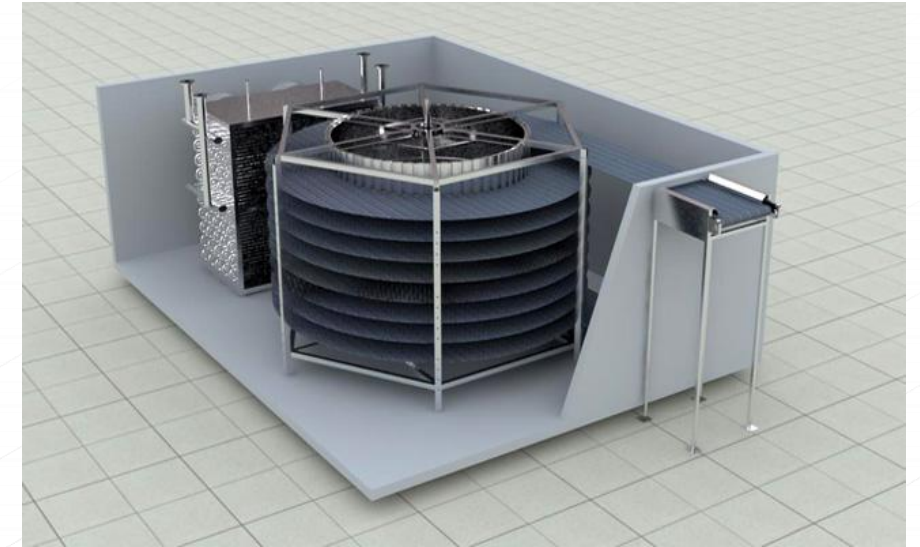

Project picture



Project picture

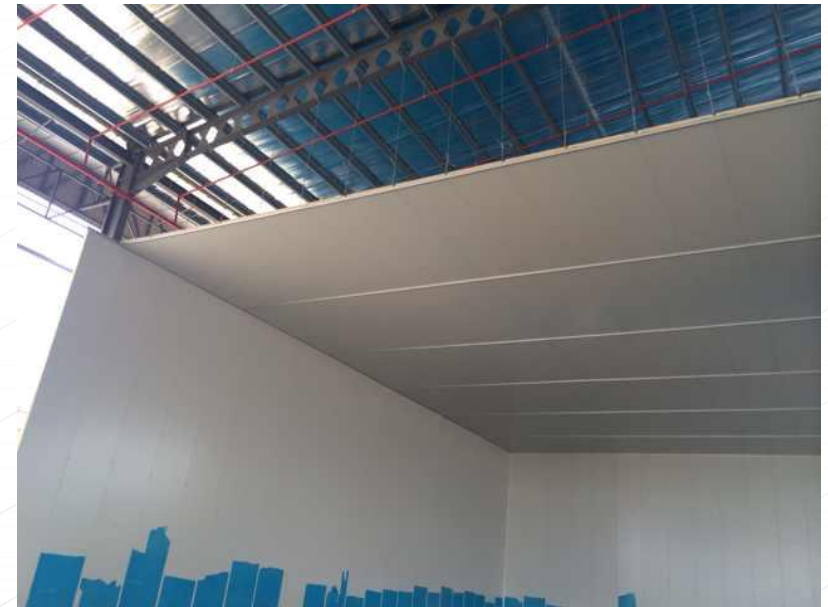

Project picture



