


Technical Data

- 1、Belt width: 650mm, effective width 580mm
Layer: 2x20, total length: 485m
- 2、Drum diameter: 2250mm
- 3、Temperature in storage: -38°C
- 4、Feeding temp: +20°C
- 5、Discharge temp: -18°C
- 6、Freezing capacity: 1500Kg/h (fish fillets)
- 7、Cold consumption: about 230Kw (-42°C~+35°C)
- 8、Power: 46KW
- 9、Refrigerant: R22 or R404A
- 10、Defrost method: by water, once/6-24h
- 11、Internal parts are made of stainless steel and aluminium(except motor and reducer)
- 12、Time of freezing in and out:20-90min (can be adjustable)
- 13、Plate thickness: 120 stainless steel
- 14、Low feeding,Low discharge
- 15、Layers interval: 90mm.

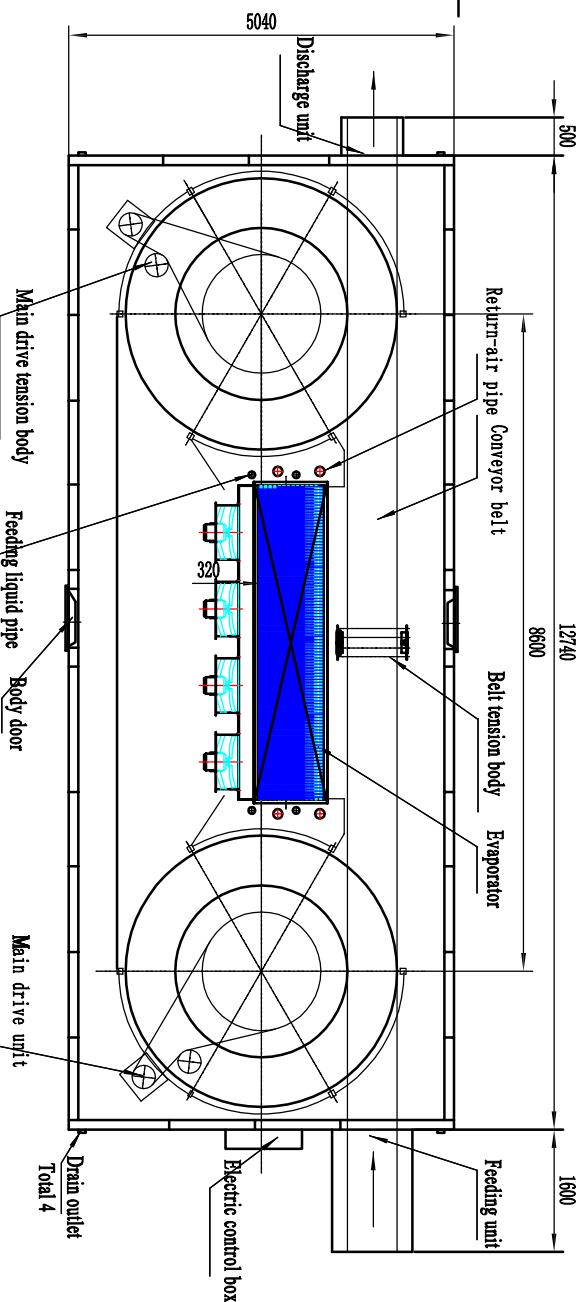

SLD-Double spiral freezing unit sketch map

Shaoxing Shangyu Yongxing Freezing Equipment Co.,Ltd