

HSF



ROHS





SPECIFICATIONS:

Current Rating: 1Amp
 Insulation Resistance: 3000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -45° C to +105° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0

Ordering Code:

PHJS01 - X - X - S - A-C-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 01 To 50
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u "Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 S:Single
- ⑤ Pin Length:
 A: 0400=4. 00mm
 B: 0220=2. 20mm
 Please mark the desired length in the A/C/B
- ⑥ Insulator Material:
 B:PA6T
 C:LCP
 E:PA9T
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ Plastic High:
 H: 2.00

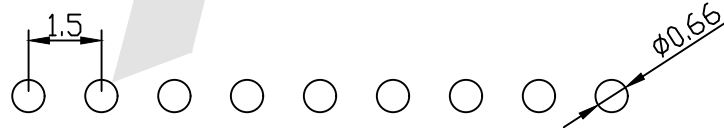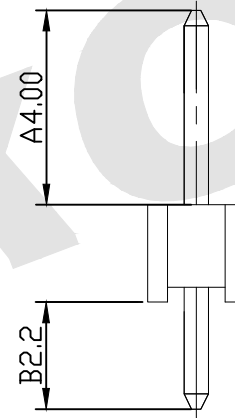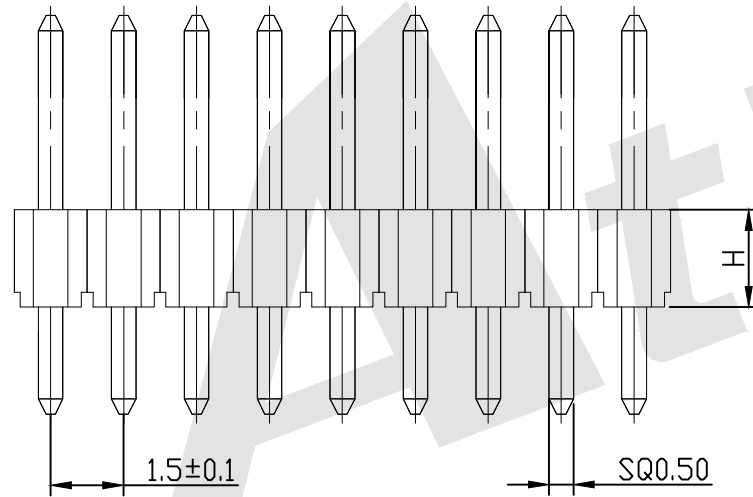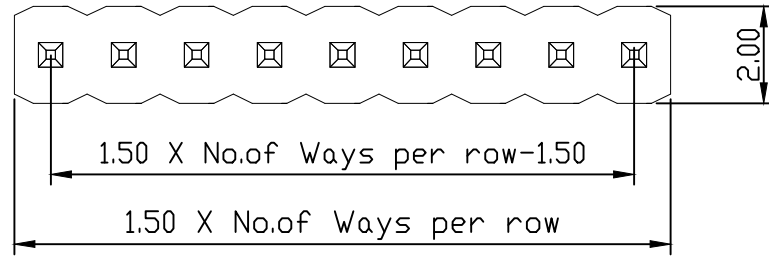

P. C. B LAYOUT

Unless Otherwise specified tolerance
 X. ±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022

TITLE:
 1.50mm Pin Header Straight Type Single Row

DRAWING NO: PHJS01-XXSXXXX

PRODUCT NO: PHJS01-XXSXXXX



REV	DESCRIPTION	DATE