



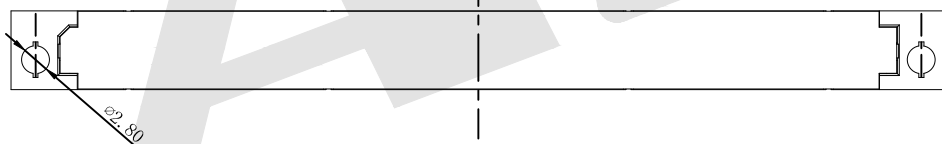



HSF

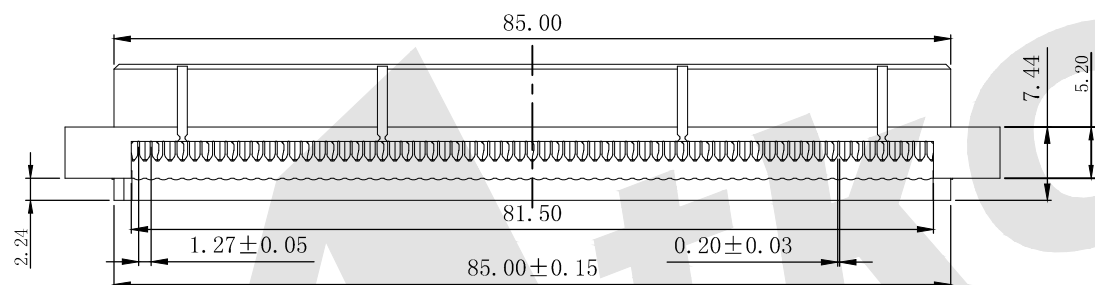

ROHS

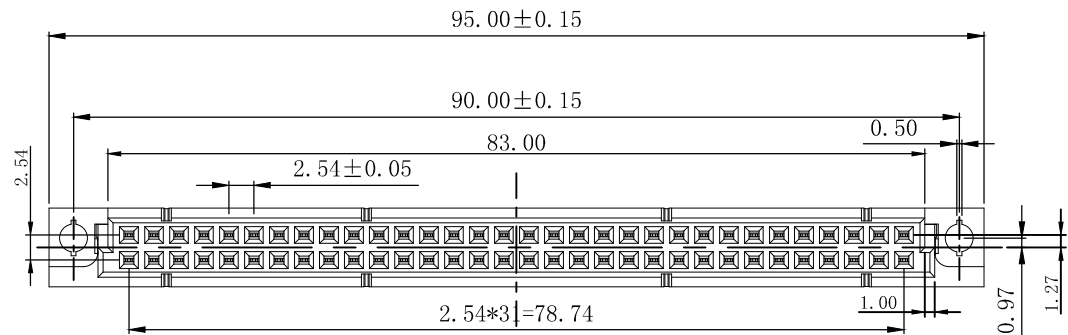

Mating Height

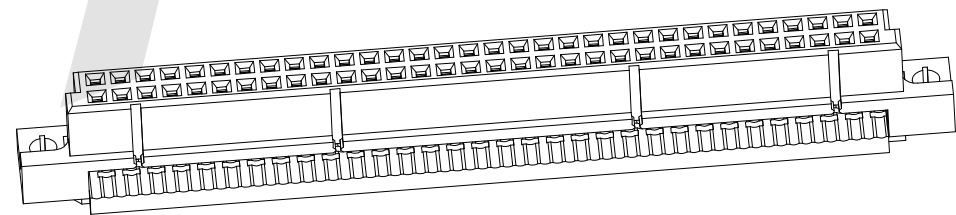

3D VIEW

SPECIFICATION

Current Rating: 3.0A  
 Insulation Resistance: 1000MΩ min.  
 Contact Resistance: 30mΩ max  
 Withstand Voltage: AC 1000V For 1 Minute  
 Operating Temperature: -55° C to +105° C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PBT+30%GF UL 94V-0


Ordering Code:

DID - 64 - S0 - A - B - 2R  
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts  
64:64P
- ③ Contact Plating  
G0: Gold flash  
G1: 3u" Gold  
S1: 3u" Gold/Ni  
G2: 5u" Gold  
S2: 5u" Gold/Ni  
G3: 10u" Gold  
S3: 10u" Gold/Ni  
G4: 15u" Gold  
S4: 15u" Gold/Ni  
G5: 30u" Gold  
S5: 30u" Gold/Ni  
SN: Tin
- ④ Insulator Material  
A: PBT  
B: PA6T  
C: LCP  
D: PA46  
E: PA9T
- ⑤ Packing  
A: Tray  
B: Bag  
T: Tube  
U: Tube+CAP  
R: Tape&Reel  
W: Tape&Reel+CAP
- ⑥ Series number  
2R

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW ZLA DATE 25/04/2022  
 CHECK BobYang DATE 25/04/2022



**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: DIN41612 Vertical Female Type  
 64P IDC Connectors 2Row

DRAWING NO: DID-64-SOAB-2R

PRODUCT NO: DID-64-SOAB-2R

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		