

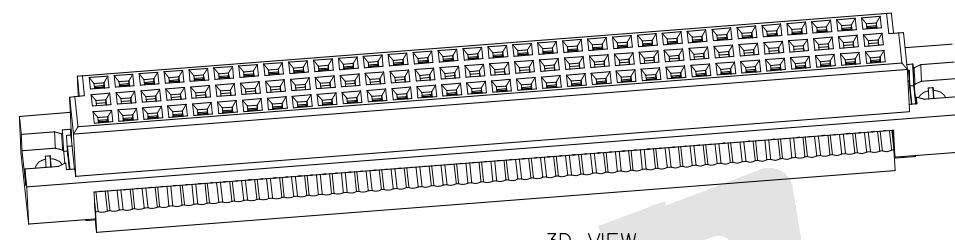

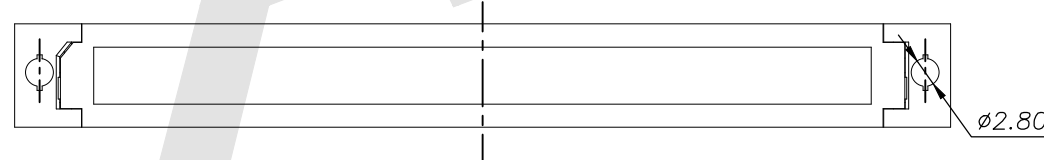


HSF

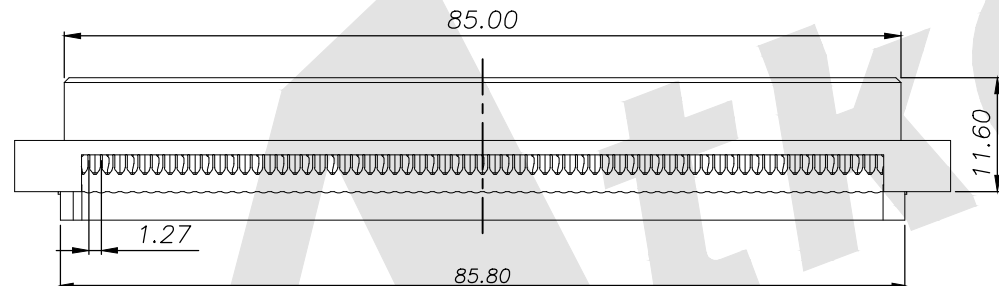

ROHS

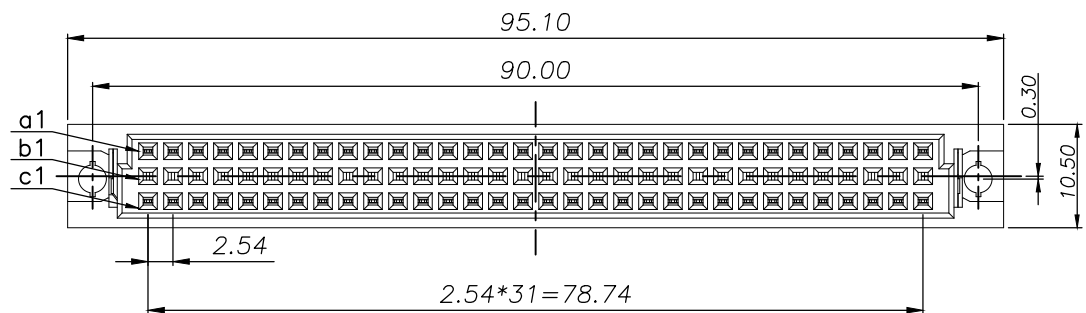

3D VIEW

**SPECIFICATION**

Current Rating: 3.0Amp  
 Insulation Resistance: 1000MΩ min.  
 Contact Resistance: 30MΩ max  
 Withstand Voltage: AC 1000V For 1 Minute  
 Operating Temperature: -55°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PBT+30%GF UL 94V-0

**Ordering Code:**

DID - XX - X - X - X - 3R  
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts  
16P 32P 64P
- ③ Rows Loaded With Contacts  
A: Row a  
K: Row a+d  
D: Row a+c
- ④ Plastic length  
1: 3x16p  
2: 3x32p
- ⑤ Contact Plating  
G0: Gold flash  
S0: Gold flash/Ni  
G1: 3u" Gold  
S1: 3u" Gold/Ni  
G2: 5u" Gold  
S2: 5u" Gold/Ni  
G3: 10u" Gold  
S3: 10u" Gold/Ni  
G4: 15u" Gold  
S4: 15u" Gold/Ni  
G5: 30u" Gold  
S5: 30u" Gold/Ni  
SN: Tin
- ⑥ Series number

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

|                    |                    |
|--------------------|--------------------|
| SCALE:<br>As Shown | UNIT:<br>mm        |
| DRAW<br>ZLA        | DATE<br>25/04/2022 |
| CHECK<br>BobYang   | DATE<br>25/04/2022 |

**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:  
 DIN41612 Vertical Female Type  
 64P IDC Connectors 3Row

DRAWING NO: DID-XX-XXX-3R  
 PRODUCT NO: DTD-XX-XXX-3R



| REV | DESCRIPTION | DATE |
|-----|-------------|------|
|     |             |      |