

HSF



ROHS






SPECIFICATION

Current Rating: 1.5Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

FHDS01 - X - X - S - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No:
- ② No. of Contacts
01 To 40
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u "Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type
S:Single
- ⑤ Plastic High:
 H1:H4.0
 H2:H4.6
 H3:H2.0
 Please mark the desired length in the H
- ⑥ Insulator Material
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T
- ⑦ Packing
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

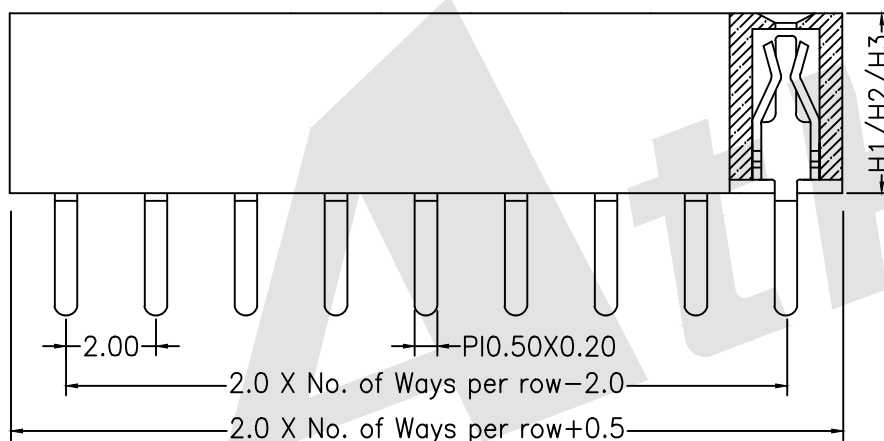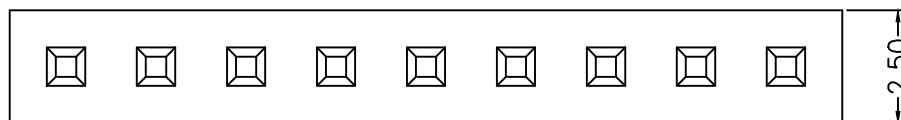

PCB LAYOUT

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 2.00mm Female Header
 Single Row Straight Type

DRAWING NO: FHDS01-XXSXXX

PRODUCT NO: FHDS01-XXSXXX

REV	DESCRIPTION	DATE
