


1

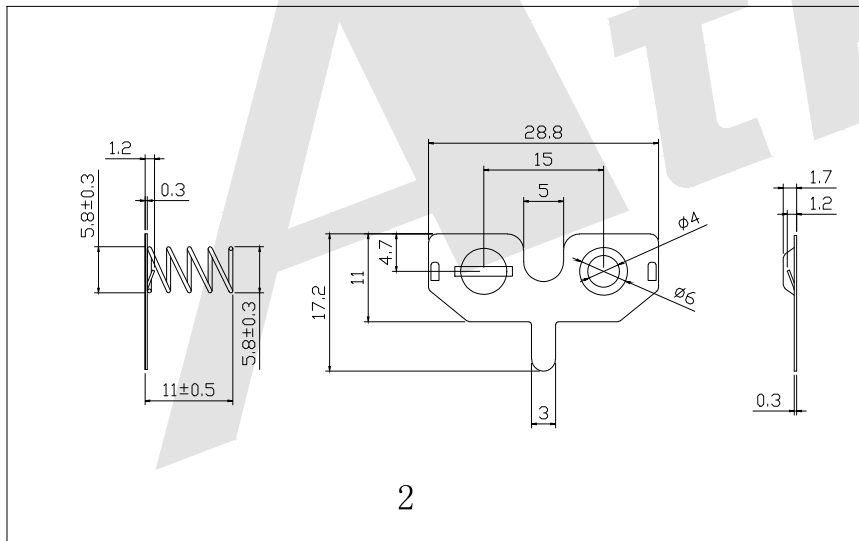

2

Technical requirements:

1. Materials shall meet Rosh requirements;
2. There should be no severe front on the surface (0.06);
3. Surface treatment: nickel plating, electroplating quality requirements: 2% concentration of brine, 48 hours
4. Refer to GB / t15015-200 - tolerance table for dimensions without tolerance indication;
5. After riveting, the spring should be upright, and the parts should not be deformed;
The riveted joint is firm and reliable with good conductivity
6. Belt specification: 0.3 (thickness) X36 (width) x15.1 (step length);Heat treatment (tempering) of cold rolled plate + carbon steel wire
Spring:;
The end face of the spring should be made safe, tempered and shaped $\phi 0.5\text{mm}$
8. Mark " " is the key monitoring size.

Order code:


BS - S - SN - R - 173L
 ① ② ③ ④ ⑤

- ① BS: Battery Contacts
- ② Apperance For The Product
S:180 TYPE
- ③ Contact Plating
SN: Tin
G0: Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold
- ④ Packing Method
A: Tray Packing
B: Bag Packing
R: Tape & Reel Packing
- ⑤ Product Number
173L

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 21/07/2022
CHECK BobYang	DATE 21/07/2022



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		

TITLE:
DRAWING NO:
PRODUCT NO: