




Technical requirements:

1. Materials shall meet Rosh requirements;
2. There should be no severe front on the surface (0.06);
3. Surface treatment: nickel plating, electroplating quality requirements: 2% concentration of brine, 48 hours
4. Refer to GB / t150115-200 - tolerance table for dimensions without tolerance indication;
5. After riveting, the spring should be upright, and the parts should not be deformed;
The riveted joint is firm and reliable with good conductivity
6. Belt specification: 0.3 (thickness) X36 (width) x15.1 (step length); Heat treatment (tempering) of cold rolled plate + carbon steel wire
Spring::
7. The end face of the spring should be made safe, tempered and shaped $\phi 0.5\text{mm}$
8. Mark "★" is the key monitoring size.

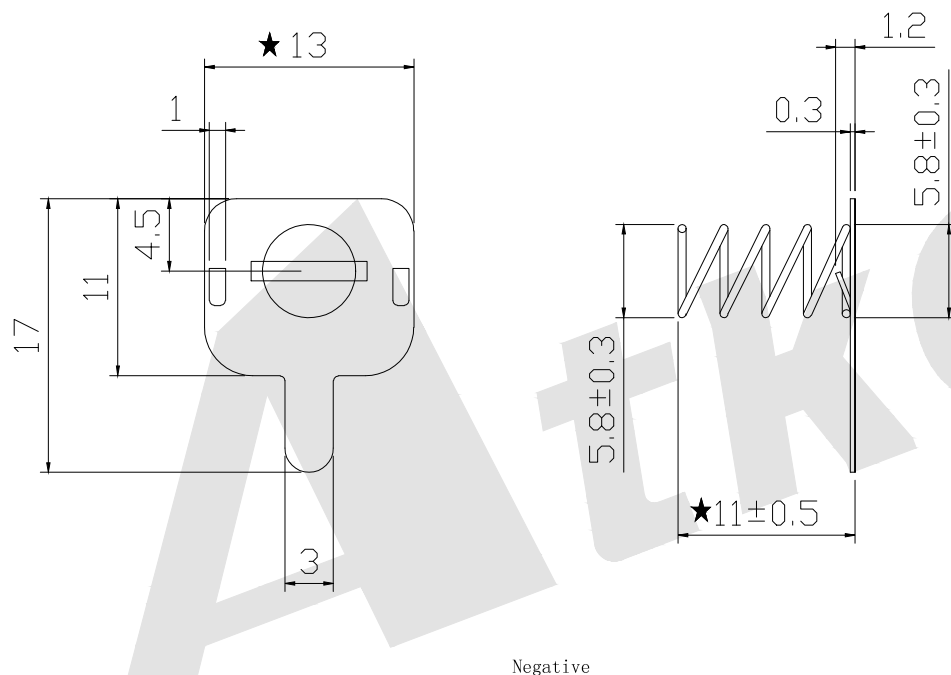

Order Code:

BS - S - SI - B - 173D

①	②	③	④	⑤
---	---	---	---	---

① BS: Battery Contacts

② Appearance for the product

S:180 TYPE

③ Contact Plating

SI:Nickel Plate

SN:Tin

G0:Gold flash

G1: 3U" Gold

G2: 5U" Gold

G3:10U" Gold

G4:15U" Gold

G5:30U" Gold

④ Packing Method

A: Tray Packing

B: BAG PACKING

R: Tape & Reel Packing

⑤ Product Number

173D

Unless Otherwise specified tolerance

X. ±0.35	X. XX: ±0.20
X. X: ±0.25	X. XXX: ±0.15

SCALE: As Shown	UNIT: mm
--------------------	-------------

DRAW ZLA	DATE 21/07/2022
-------------	--------------------

CHECK BobYang	DATE 21/07/2022
------------------	--------------------



3rd ANGLE PROJECTION

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 5# Cell Battery Contacts(Negative) 173D

DRAWING NO: BS-S-SI-B-173DN

PRODUCT NO: BS-S-SI-B-173DN

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		