


HSF



RoHS

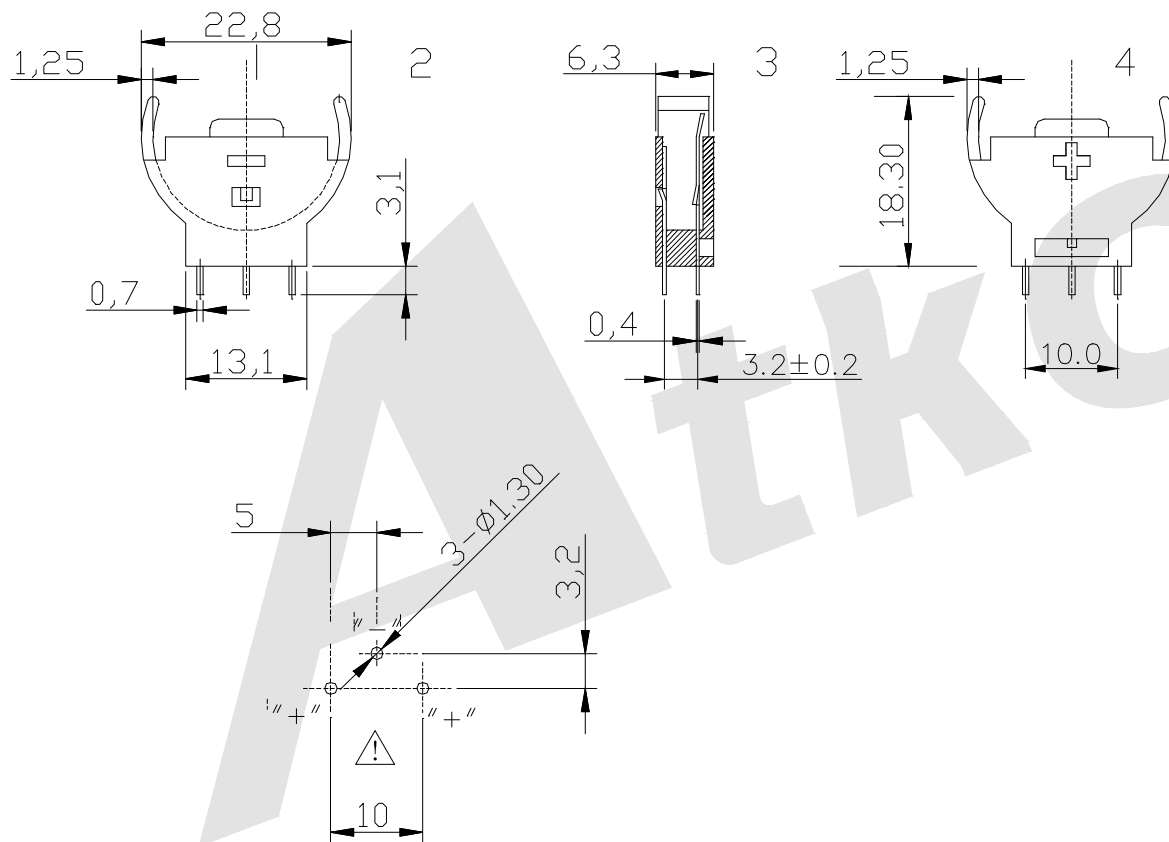

Note:

1. Material:

- a. Housing: PA V0 GF30.15
- b. Contact: C5191
- c. Surface Plating: Sn 10u"

2. Electric:

- a. Contact Resistance: 30 Mlliohms Max.
- b. Insulation Resistance: 1000 Mega Ohms Min.
- c. Dielectnic Voltage: 500 V AC One Sec Level
- d. Operating Temperature: -55° To +105°

Order code:

BT	—	S	—	SN	—	A	—	CR2032E
①		②		③		④		⑤

① BT: Coin Cell Holders ③ Contact Plating

② Apperance for the product

M: SMT TYPE

S: 180 TYPE

R: 90 TYPE

SN: Tin

G0: Gold flash

G1: 3U" Gold

G2: 5U" Gold

G3: 10U" Gold

G4: 15U" Gold

G5: 30U" Gold

④ Packing method

A: Tray packing

R: Tape & reel packing

⑤ Product number

CR2032E


Unless Otherwise specified tolerance

X. ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15

SCALE:	UNIT:
As Shown	mm

DRAW	DATE
ZLA	21/07/2022

CHECK	DATE
BobYang	21/07/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: Coin Cell Holders For CR2032

DRAWING NO: BT-S-SN-A-CR2032E

PRODUCT NO: BT-S-SN-A-CR2032E

REV

DESCRIPTION

DATE