

PCB Layout Diagram
Top View

Note:

1. Material:

- a. Housing: Thermoplastic Glass Fibre UL94V-0
- b. Contact: Phosphor Bronze (Surface Plating Au)
See Ordering Information


2. Electric:

- a. Contact Resistance: 30 Milliohms Max.
- b. Insulation Resistance: 1000 Mega Ohms Min.
- c. Dielectric Voltage: 500 V AC One Sec Level
- d. Operating Temperature: -55° To +105°

Order code:

BT — S — GO — A — CR2032F
 ① ② ③ ④ ⑤


- ① BT: Coin Cell Holders
- ② Appearance for the product
M: SMT TYPE
S: 180 TYPE
R: 90 TYPE
- ③ Contact Plating
SN: Tin
G0: Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold

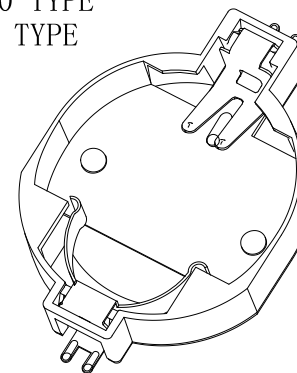

- ④ Packing method
A: Tray packing
R: Tape & reel packing
- ⑤ Product number
CR2032F

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 21/07/2022
 CHECK BobYang DATE 21/07/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:
Coin Cell Holders For CR2032

DRAWING NO: BT-S-GO-A-CR2032F

PRODUCT NO: BT-S-GO-A-CR2032F

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		