

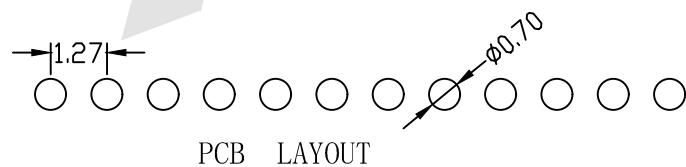


HSF

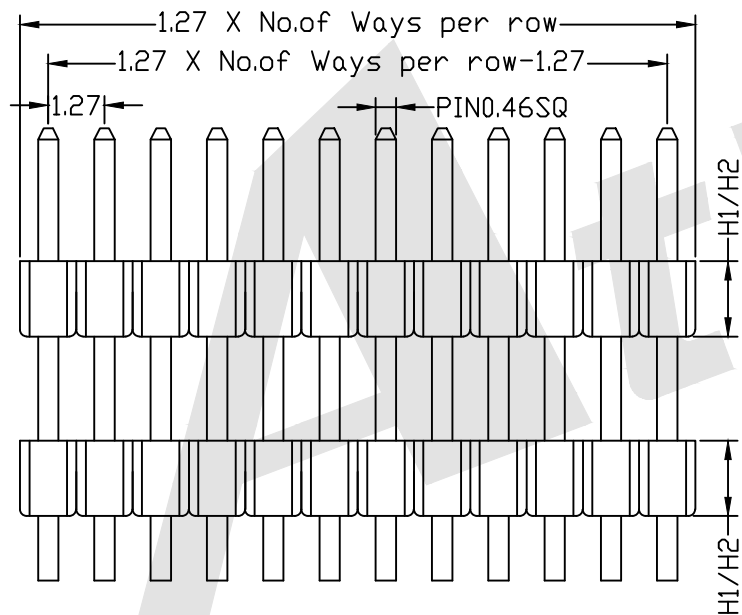

ROHS

1.27mm Pin Header Single Row Double Plastic Angle Type H1.7/2.5

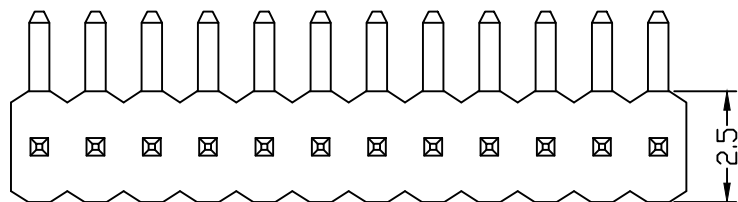


SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:


PHCR05- X - X - S - A-C-D-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 01 To 50
- ③ Contact Plating:
 G0:30u" Gold S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN: Tin
- ④ Connector Type:
 S: Single Row
- ⑤ Pin Length:
 A: 0300=3.00mm
 C: 0400=4.00mm
 D: 0100=1.00mm
 B: 0180=1.80mm
 Please mark the desired length in the A/C/D/B
- ⑥ Insulator Material:
 B: PA6T
 C: LCP
 E: PA9T
- ⑦ Packing:
 A: Tray B: Bag
 T: Tube U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP
- ⑧ Plastic High:
 H1: 1.7mm
 H2: 2.5mm

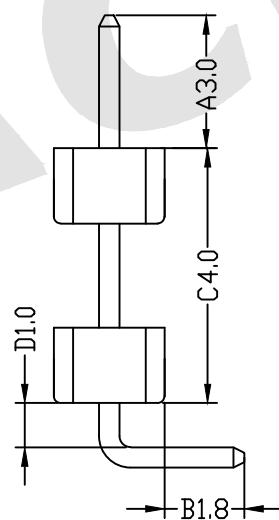

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
 Http://www.atkconn.com

TITLE: 1.27mm Pin Header Single Row Double Plastic Angle Type

DRAWING NO: PHCR05-XXS-0300-0400-0100-0180-XXX

PRODUCT NO: PHCR05-XXS-0300-0400-0100-0180-XXX

REV	DESCRIPTION	DATE