





HSF

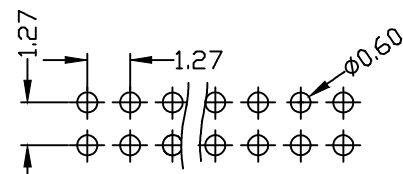

ROHS

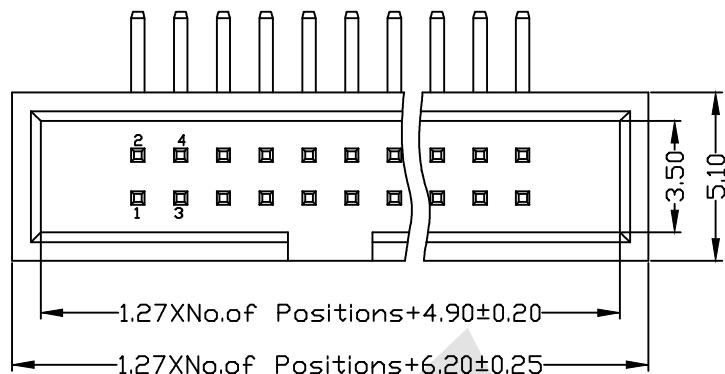

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

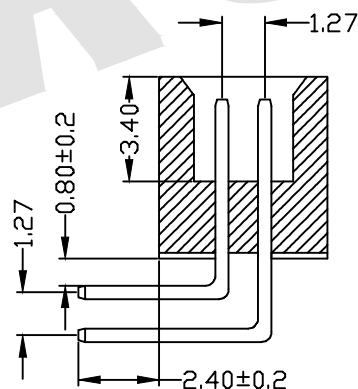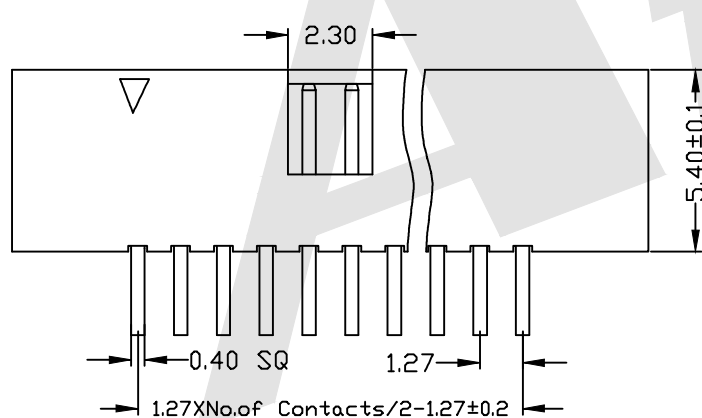

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 1000MΩmin
 Contact Resistance: 20mΩmax
 Withstand Voltage: 500V AC/DC
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0
 Operating Temperature: -40°C to +105°C
 Available For Poles at Present: ⚠
 4P,10P,12P,20P,22P,24P,26P,30P,40P,44P


Ordering Code:

BHAR03 - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts: 10-100P
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Color Insulator:
 B:Black
 U:Blue
 W:White
- ⑤ Insulator Material:
 A:PA6T
 B:LCP
 E:PA9T
- ⑥ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
 Http://www.atkconn.com

TITLE:
 1.27mm Box Header 90°, H=5.4mm

DRAWING NO: BHAR03-XXXXXX
 PRODUCT NO: BHAR03-XXXXXX

REV	DESCRIPTION	DATE