

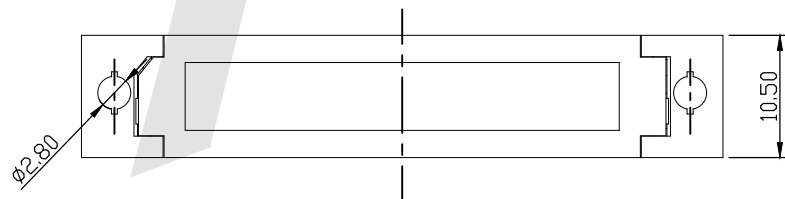


HSF

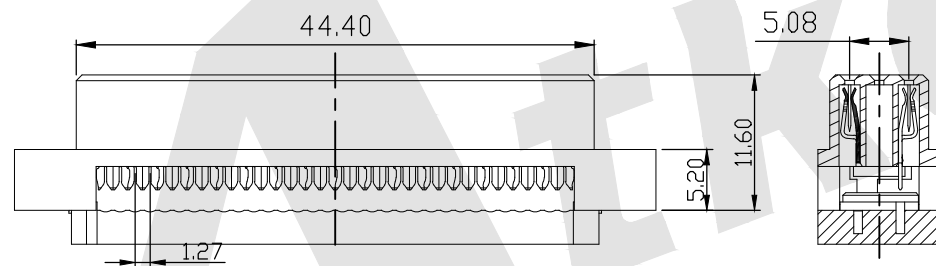

ROHS

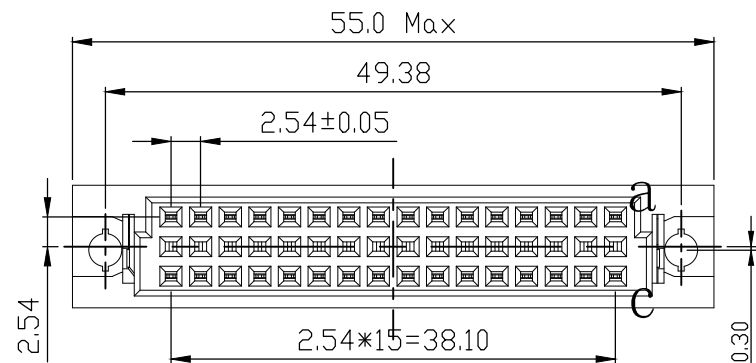

SPECIFICATION

Current Rating: 3.0Amp  
 Insulation Resistance: 1000MΩ min.  
 Contact Resistance: 30MΩ max  
 Withstand Voltage: AC 1000V For 1 Minute  
 Operating Temperature: -55° C to +105° C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PBT+30%GF UL 94V-0

Ordering Code:


DID - 32 - K - 1 - S0 - 3R

① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts  
16P 32P
- ③ Rows Loaded With Contacts  
A: Row a  
K: Row a+c  
D: Row c
- ④ Plastic Length  
1: 2x16P  
2: 1x16P
- ⑤ Contact Plating  
G0: Gold flash  
S0: Gold flash/Ni  
G1: 3u" Gold  
S1: 3u" Gold/Ni  
G2: 5u" Gold  
S2: 5u" Gold/Ni  
G3: 10u" Gold  
S3: 10u" Gold/Ni  
G4: 15u" Gold  
S4: 15u" Gold/Ni  
G5: 30u" Gold  
S5: 30u" Gold/Ni  
SN: Tin
- ⑥ Series Number  
3R

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW ZLA DATE 25/04/2022  
 CHECK BobYang DATE 25/04/2022



**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: DIN41612 Vertical Female Type  
 32P IDC Connectors 3Row

DRAWING NO: DID-32K1S0-3R

PRODUCT NO: DID-32K1S0-3R

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		