



SPECIFICATION





Current Rating: 1Amp
 Insulation Resistance: 1000MΩmin
 Contact Resistance: 20MΩmax
 Withstand Voltage: 500V AC/DC
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0
 Operating Temperature: -40° C to +105° C

Available For Poles at Present: 4P, 10P, 12P, 20P, 22P, 24P, 26P, 30P, 40P, 44P

Ordering Code:

BHAS04 - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts
10-100P
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Color Insulator
B:Black
U:Blue
W:White
- ⑤ Insulator Material
B:PA6T
C:LCP
E:PA9T
- ⑥ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

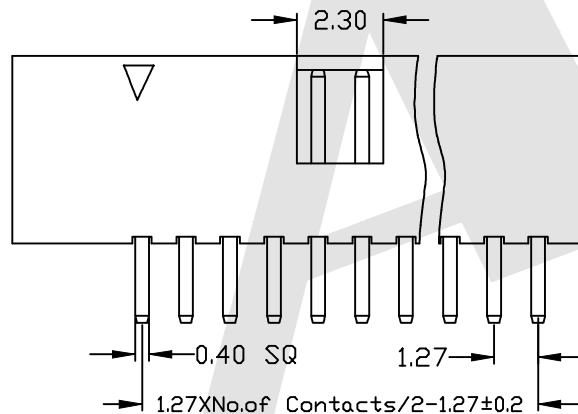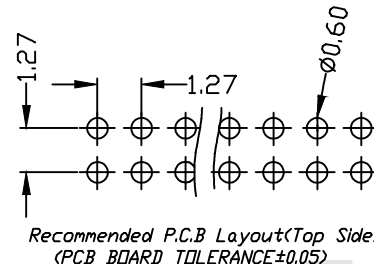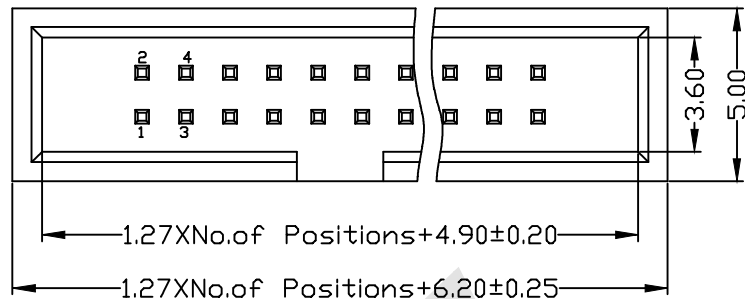


Unless Otherwise specified tolerance
 X. ±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022

TITLE:
1.27mm Box Header 180°, H=5.4mm



DRAWING NO: BHAS04-XXXXXX
 PRODUCT NO: BHAS04-XXXXXX

REV	DESCRIPTION	DATE