

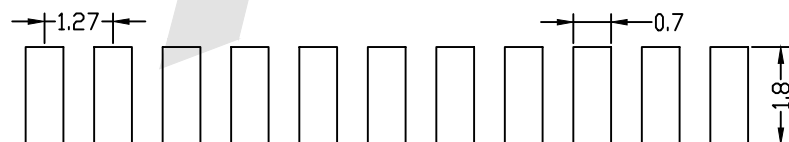


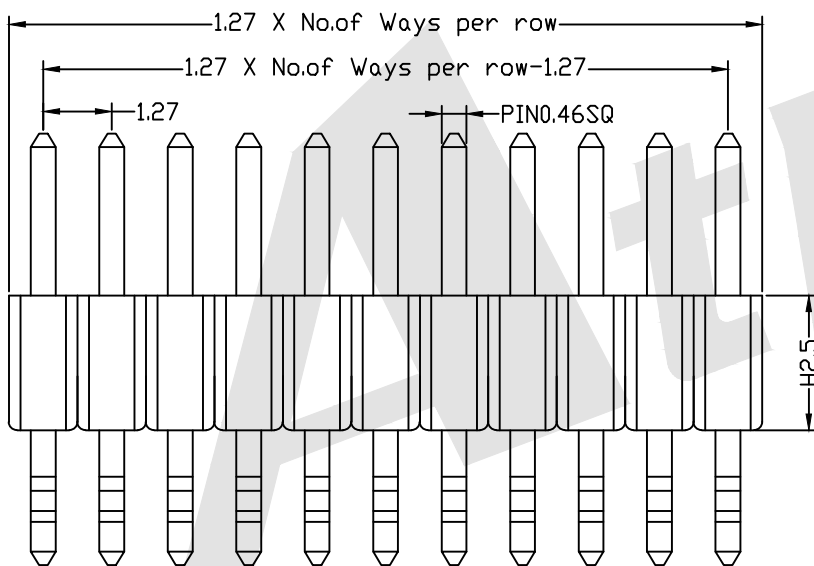

1.27mm Pin Header Single Row Angle SMT Type

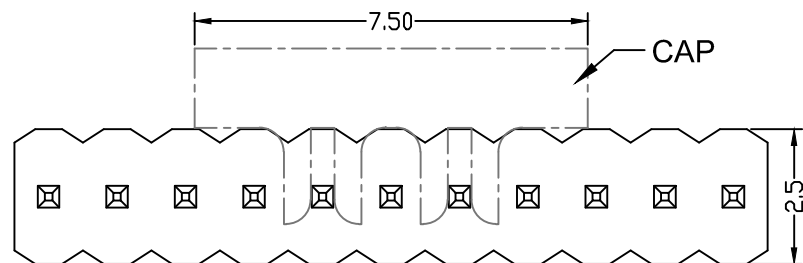

PCB LAYOUT

SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black

Ordering Code:

PHCM02 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{S}{3}$ - $\frac{A-B}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$

- ① Series No:
- ② No.of Contacts
01 To 50
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
S:Single
- ⑤ Pin Length:
A: 0300=3.00mm
B: 0250=2.50mm
Please mark the desired length in the A/B
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Unless Otherwise specified tolerance
X. XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15
X. XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

Atkconn® ATKCONN ELECTRONICS CO., LTD
Http://www.atkconn.com

TITLE:
1.27mm Pin Header Single Row Angle SMT Type

DRAWING NO: PHCM02-XXS-0300-0250-XX

PRODUCT NO: PHCM02-XXS-0300-0250-XX



3rd ANGLE PROJECTION

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		