

HSF



ROHS





SPECIFICATIONS:

Current Rating: 1Amp
 Insulation Resistance: 1000 ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0, Black

Ordering Code:

PHCS03 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{S}{3}$ - $\frac{A-B}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$ - $\frac{X}{8}$


- ① Series No:
- ② No. of Contacts: 01 To 50
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN: Tin
- ④ Connector Type:
 S:Single
- ⑤ Pin Length:
 A: 0300=3.00mm
 B: 0020=1.80mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material:
 B:PA6T
 C:LCP
 E:PA9T
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ Plastic High:
 H1:1.7mm
 H2:2.5mm

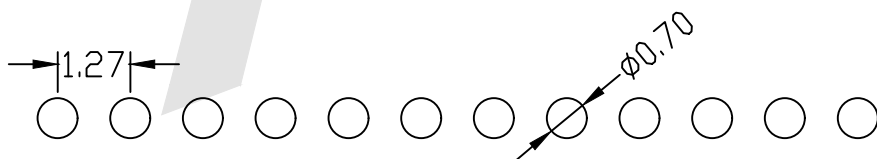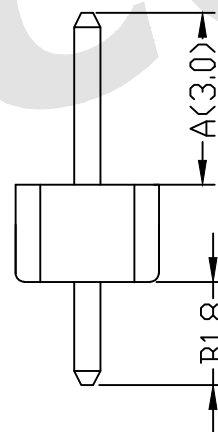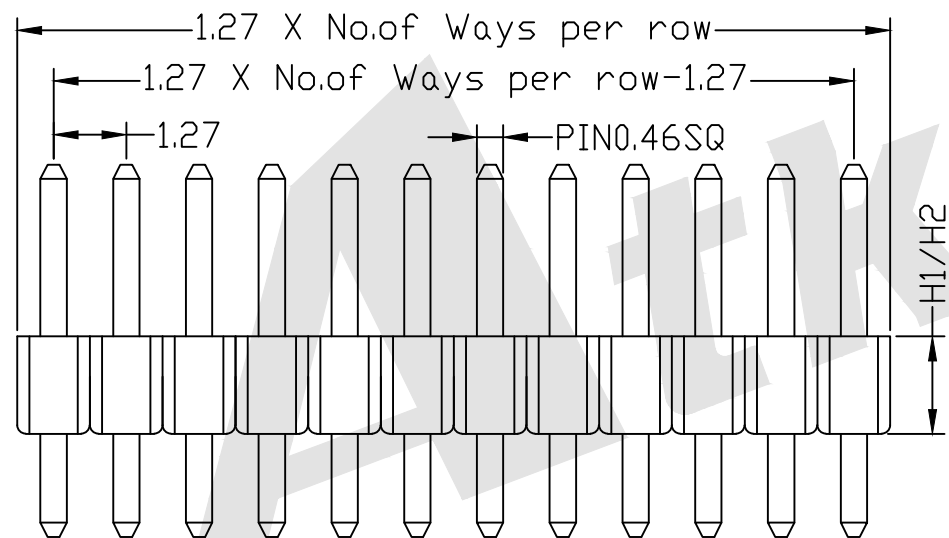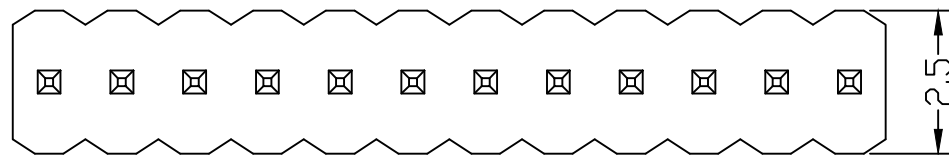

P. C. B LAYOUT

Unless Otherwise specified tolerance
 X. ± 0.35 X. XX: ± 0.20
 X. X: ± 0.25 X. XXX: ± 0.15

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:
1.27mm Pin Header Single Row Straight Type

DRAWING NO: PHCS03-XXS-0300-0180-XXX

PRODUCT NO: PHCS03-XXS-0300-0180-XXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		