

HSF



ROHS





SPECIFICATIONS:

Current Rating: 1Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0, Black

Ordering Code:

PHCS09 - X - X - D - A-C-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
02 To 100
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A:0300=3.0mm
C:0500=5.0mm
B:0180=1.8mm
Please mark the desired length in the A/C/B
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ⑧ Plastic High
H1:0.85mm
H2:1.0mm
H3:1.5mm

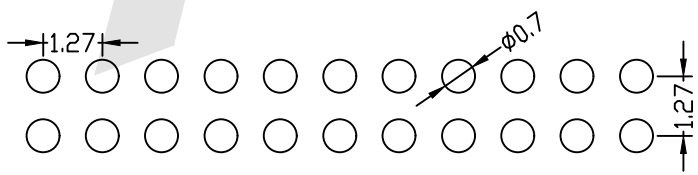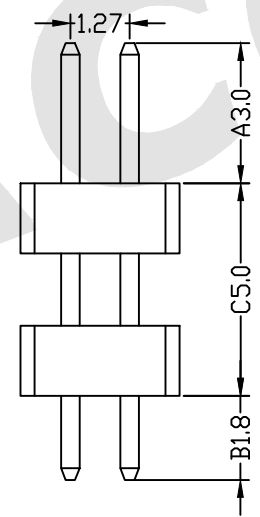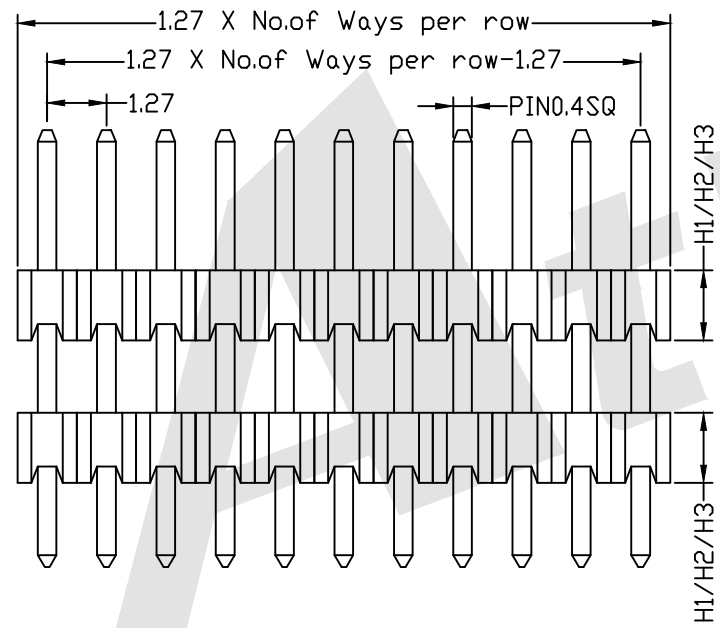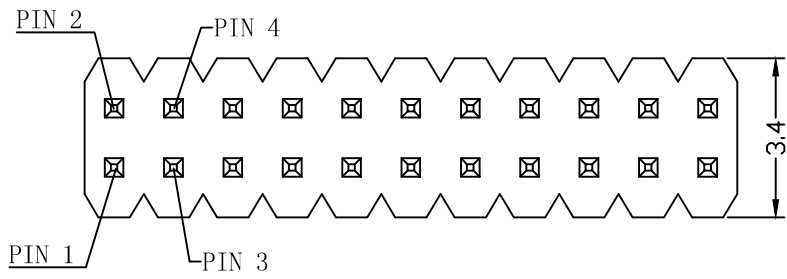


P. C. B LAYOUT

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Atkconn® ATKCONN ELECTRONICS CO., LTD
 Http://www.atkconn.com

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

TITLE:
1.27mm Pin Header Straight
Type Dual Row



DRAWING NO: PHCS09-XXD-0300-0500-0180-XXX
 PRODUCT NO: PHCS09-XXD-0300-0500-0180-XXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		