

HSF



ROHS



SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black



Ordering Code:

PHDR10 - X - X - F - A - D - B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
04 To 160
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u "Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
F:Four
- ⑤ Pin Length:
A:0400=4.00mm
D:0075=0.75mm
B:0280=2.80mm
Please mark the desired length in the A/D/B
- ⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
- ⑦ Packing
A:Tray
B:Bag
T:Tube

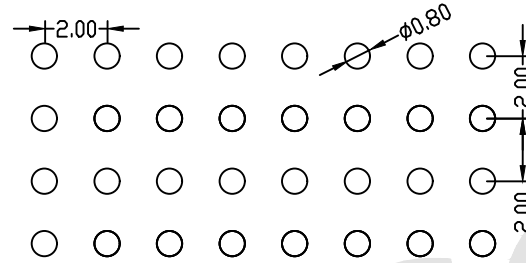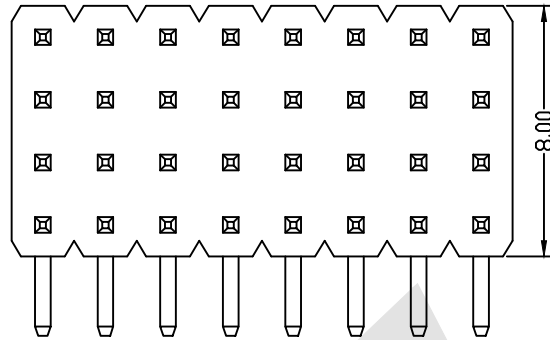

PCB LAYOUT

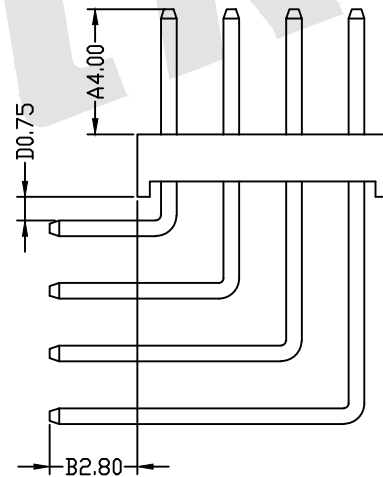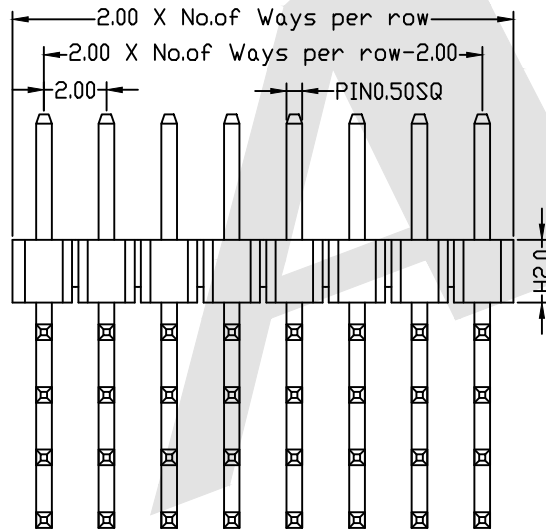


Unless Otherwise specified tolerance
 X. XX: ±0.20
 X. X: ±0.25 X. XXX: ±0.15
 X. ±0.35 X. XX: ±0.20
 X. X: ±0.25 X. XXX: ±0.15

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

TITLE:
2.00mm Pin Header Four Row Angle Type



DRAWING NO: PHDR10-XXF-0400-0075-0280-XX
 PRODUCT NO: PHDR10-XXF-0400-0075-0280-XX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		