

HSF



ROHS





**SPECIFICATION**

Current Rating: 1.5 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T,UL 94V-0  
 Standard:PBT UL94V-0 Black

**Ordering Code:**

PHDS09 - X - X - T - A - C - B - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts  
03 To 120
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3U" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN:Tin
- ④ Connector Type  
T:Three
- ⑤ Pin Length:  
A:0400=4.0mm  
C:0600=6.0mm  
B:0280=2.8mm  
Please mark the desired length in the A/C/B
- ⑥ Insulator Material  
A:PBT  
B:PA6T  
C:LCP  
D:PA46  
E:PA9T
- ⑦ Packing:  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP

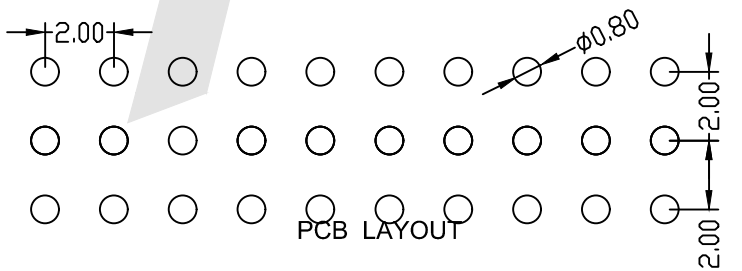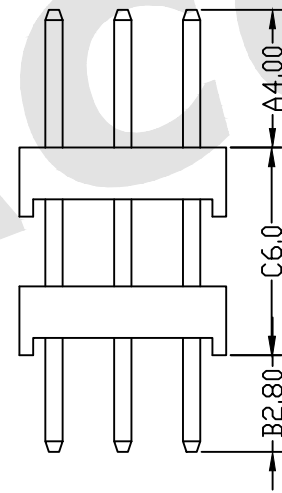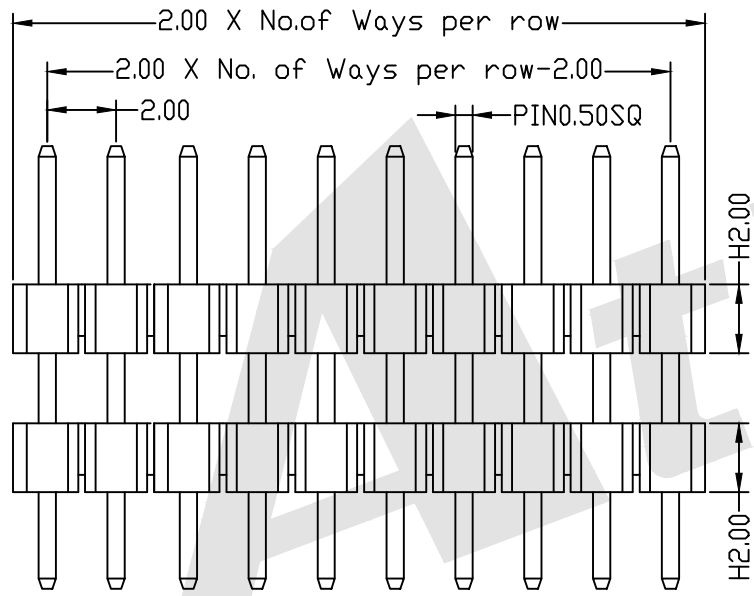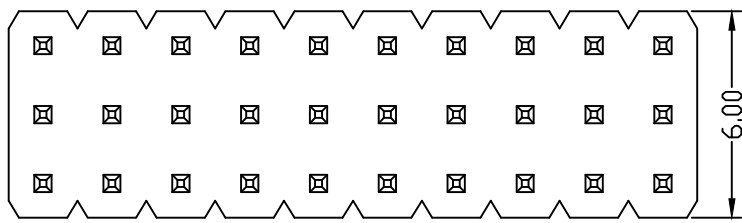


Unless Otherwise specified tolerance  
 X. XX: ±0.20  
 X. X: ±0.25 X. XXX: ±0.15  
 X. XX: ±0.35

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:	2.00mm Pin Header Three RowDouble Plastic Straight Type
DRAWING NO:	PHDS09-XXT-0400-0600-0280-XX
PRODUCT NO:	PHDS09-XXT-0400-0600-0280-XX



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		