

HSF



ROHS



SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black



Ordering Code:

PHDS11 - X - X - F - A - C - B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 04 To 160
- ③ Contact Plating:
 - G0: Gold flash S0: Selective
 - G1: 3u" Gold S1: Selective 3u"
 - G2: 5u" Gold S2: Selective 5u"
 - G3: 10u" Gold S3: Selective 10u"
 - G4: 15u" Gold S4: Selective 15u"
 - G5: 30u" Gold S5: Selective 30u"
 - SN: Tin
- ④ Connector Type: F: Four
- ⑤ Pin Length:
 - A: 0400=4.00mm
 - C: 0560=5.60mm
 - B: 0280=2.80mm
 Please mark the desired length in the A/C/B
- ⑥ Insulator Material:
 - A: PBT
 - B: PA6T
 - C: LCP
 - D: PA46
 - E: PA9T
- ⑦ Packing:
 - A: Tray
 - B: Bag
 - T: Tube
 - U: Tube+CAP
 - R: Tape&Reel
 - W: Tape&Reel+CAP

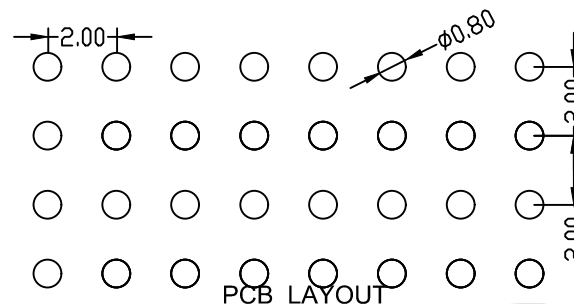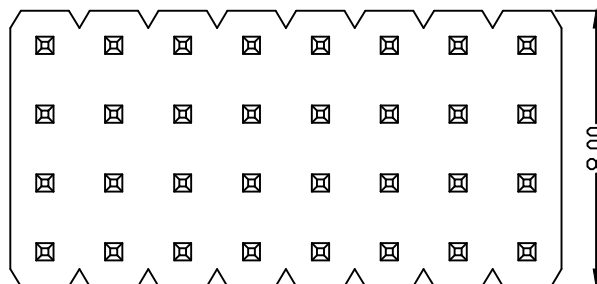


PCB LAYOUT

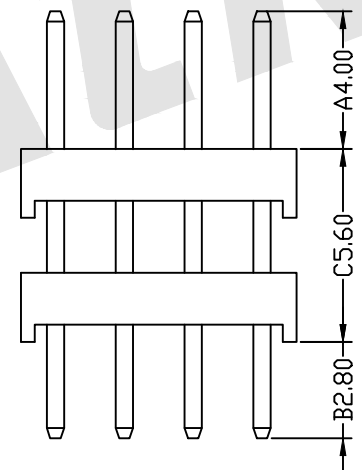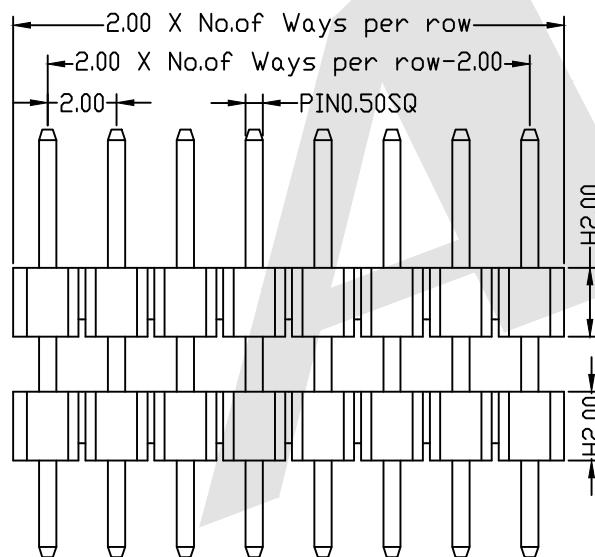

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 2.00mm Pin Header Four Row Double Plastic Straight Type

DRAWING NO: PHDS11-XXF-0400-0560-0280-XX

PRODUCT NO: PHDS11-XXF-0400-0560-0280-XX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		