

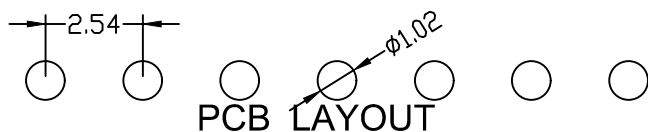
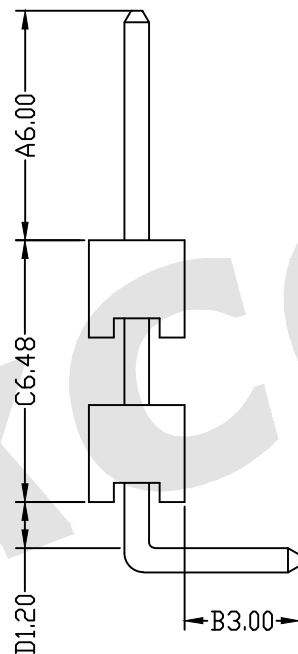


HSF

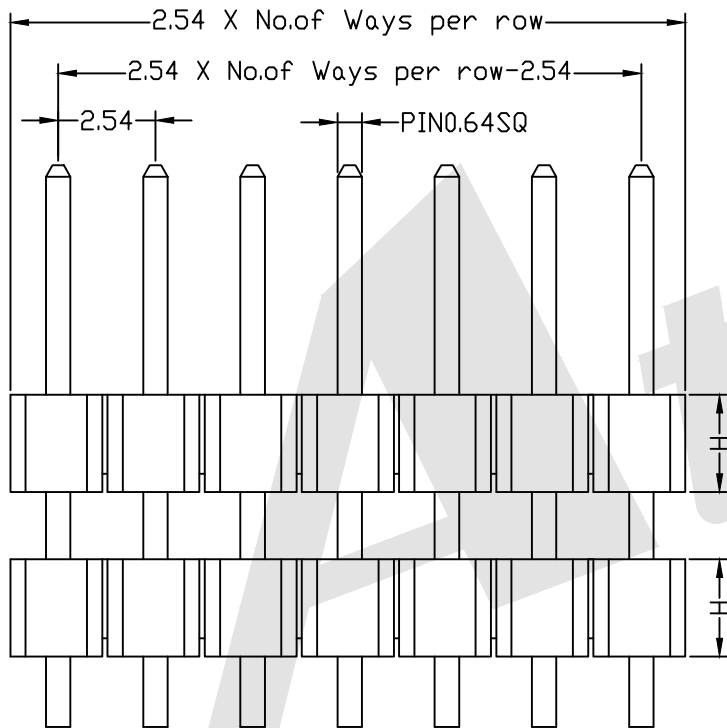

ROHS

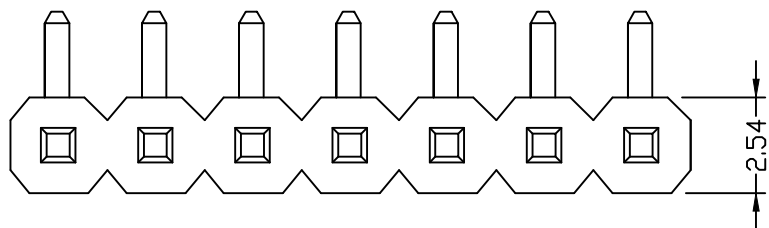

SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0 Black


Ordering Code:

PHER02 - X - X - S - A-C-D-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 01 To 40
- ③ Contact Plating: G0: Gold flash S0: Selective
 G1: 3u" Gold S1: Selective 3u"
 G2: 5u" Gold S2: Selective 5u"
 G3: 10u" Gold S3: Selective 10u"
 G4: 15u" Gold S4: Selective 15u"
 G5: 30u" Gold S5: Selective 30u"
 SN: Tin
- ④ Connector Type: S: Single
- ⑤ Pin Length: A: 0600=6.00mm
 C: 0648=6.48mm
 D: 0120=1.20mm
 B: 0300=3.00mm
 Please mark the desired length in the A/C/D/B
- ⑥ Insulator Material: A: PBT
 B: PA6T
 C: LCP
 D: PA46
 E: PA9T
- ⑦ Packing: A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP
- ⑧ Plastic High: H1: 1.70mm
 H2: 2.54mm
 H3: 2.00mm
 H4: 1.50mm

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: ZLA DATE: 24/04/2022
 CHECK: BobYang DATE: 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 2.54mm Pin Header SingleRow
 DoublePlastic Angle Type

DRAWING NO: PHER02-XXS-0600-0648-0120-0300-XXX

PRODUCT NO: PHER02-XXS-0600-0648-0120-0300-XXX

REV	DESCRIPTION	DATE