

HSF



ROHS





# SPECIFICATION

Current Rating: 3 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PBT,UL 94V-0 Black


## Ordering Code:

$\text{PHER05} - \text{X} - \text{X} - \text{X} - \text{D} - \text{A} - \text{B} - \text{X} - \text{X}$   
 ①      ②      ③      ④      ⑤      ⑥      ⑦

- ① Series No:
- ② No. of Contacts  
02 To 80
- ③ Contact Plating:  
 G0:Gold flash S0:Selective  
 G1:3U" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN:Tin
- ④ Connector Type  
D: Dual
- ⑤ Pin Length:  
 A:0600=6.00mm  
 B:0300=3.00mm  
 Please mark the desired length in the A/B
- ⑥ Insulator Material  
 A:PBT  
 B:PA6T  
 C:LCP  
 D:PA46  
 E:PA9T
- ⑦ Packing:  
 A:Tray  
 B:Bag  
 T:Tube  
 U:Tube+CAP  
 R:Tape&Reel  
 W:Tape&Reel+CAP

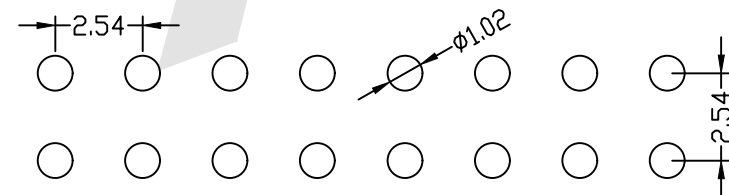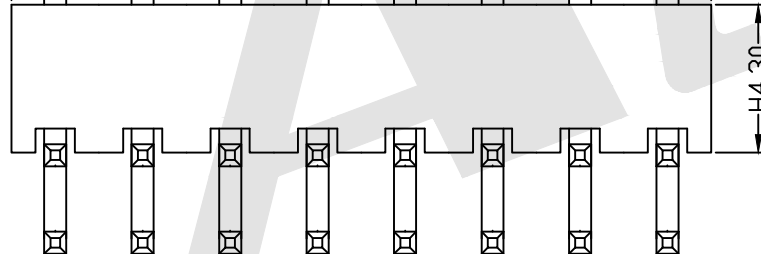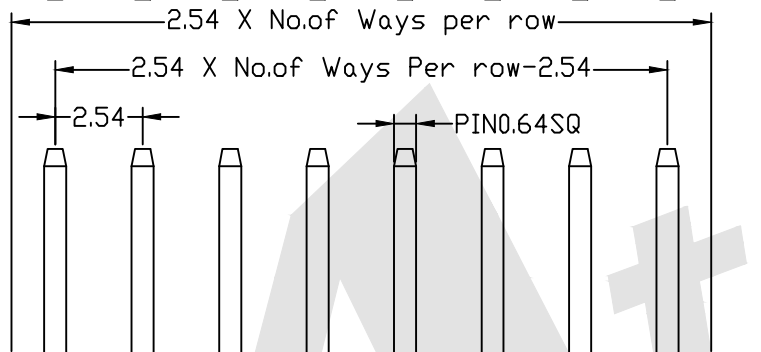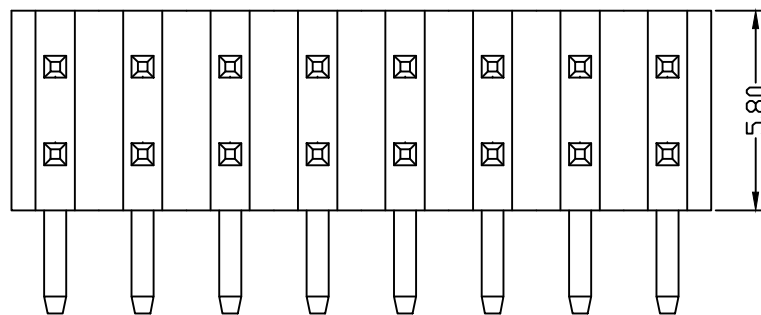

PCB LAYOUT

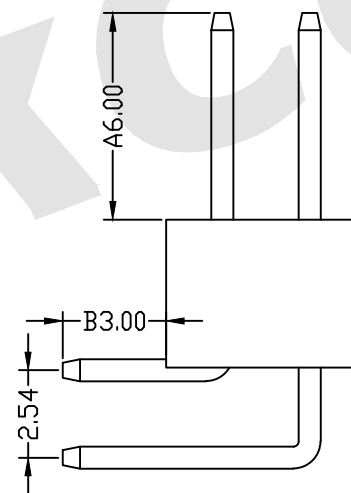


Unless Otherwise specified tolerance  
 X. XX: ±0.20  
 X. X: ±0.25  
 X. XX: ±0.15

**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

TITLE:  
2.54mm Pin Header DualRow Angle Type H:4.3



DRAWING NO: PHER05-XXD-0600-0300-XX  
 PRODUCT NO: PHER05-XXD-0600-0300-XX

REV	DESCRIPTION	DATE