

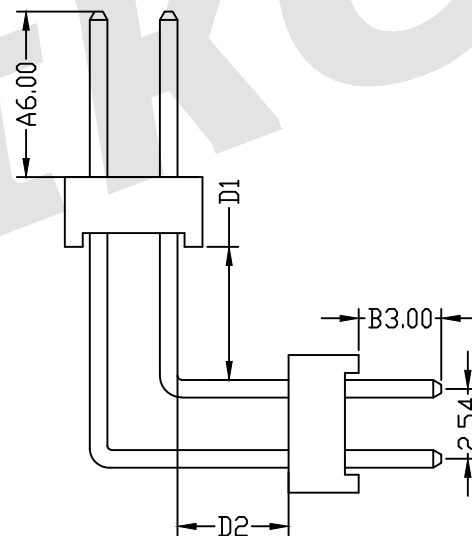
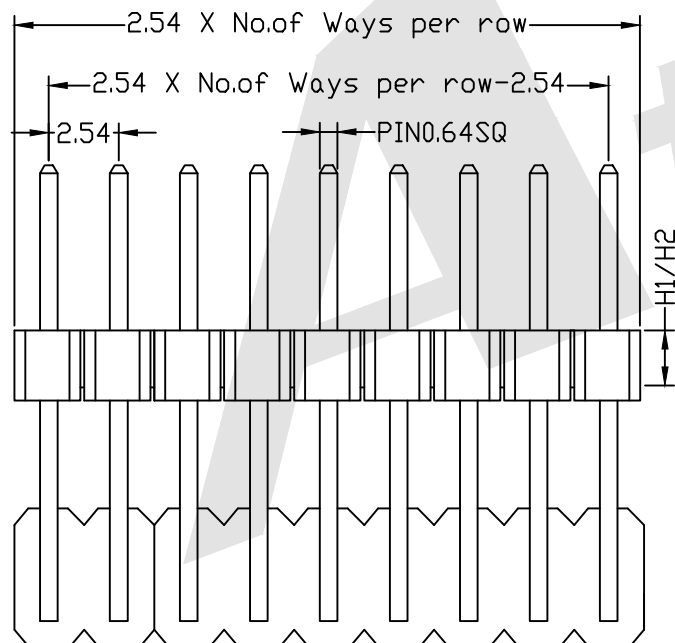


HSF

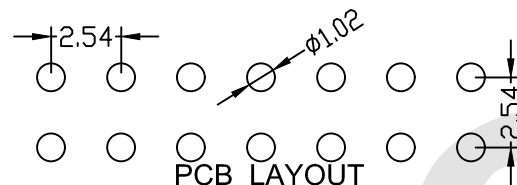

ROHS

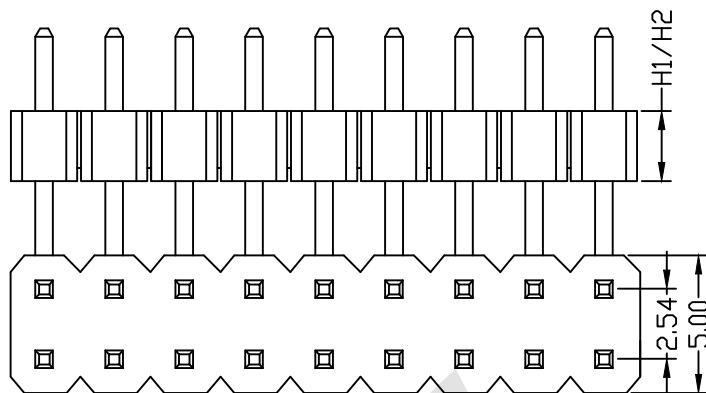

### SPECIFICATION

Current Rating: 3Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PBT,UL 94V-0 Black


#### Ordering Code:

PHER08 - X - X - D - A - D1 - D2 - B - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No.of Contacts: 02 To 80
- ③ Contact Plating:  
 G0:Gold flash S0:Selective  
 G1:3U" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN: Tin
- ④ Connector Type  
 D: Dual
- ⑤ Pin Length:  
 A:0600=6.00mm  
 D1:0483=4.83mm  
 D2:0404=4.04mm  
 B:0300=3.00mm  
 Please mark the desired length in the A/D1/D2/B
- ⑥ Insulator Material  
 A:PBT  
 B:PA6T  
 C:LCP  
 D:PA46  
 E:PA9T
- ⑦ Packing:  
 A:Tray  
 B:Bag  
 T:Tube  
 U:Tube+CAP  
 R:Tape&Reel  
 W:Tape&Reel+CAP
- ⑧ Plastic High  
 H1:1.70mm  
 H2:2.54mm  
 H3:2.00mm  
 H4:1.50mm

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW ZLA DATE 24/04/2022  
 CHECK BobYang DATE 24/04/2022



**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:  
 2.54mm Pin Header Dual Row Double Plastic Angle Type

DRAWING NO: PHER08-XXD-0600-0483-0404-0300-XXX

PRODUCT NO: PHER08-XXD-0600-0483-0404-0300-XXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		