

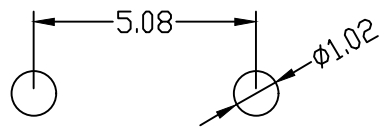
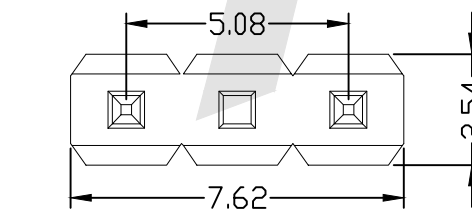
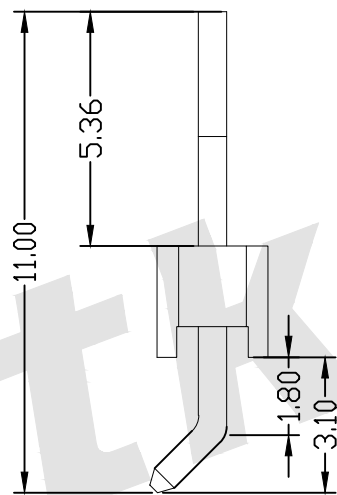


HS  R O H S

SPECIFICATIONS:

Current Rating: 3 Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0 Black

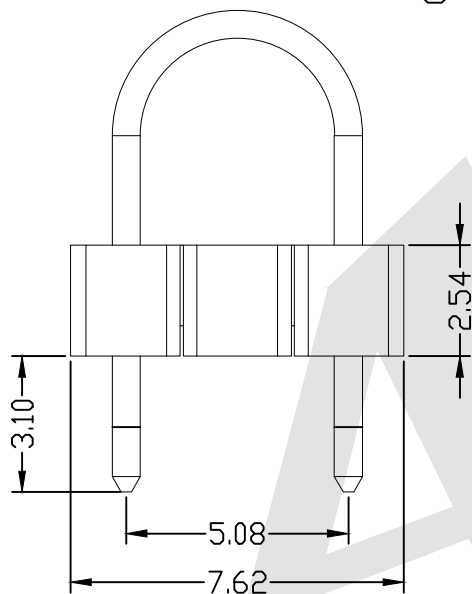

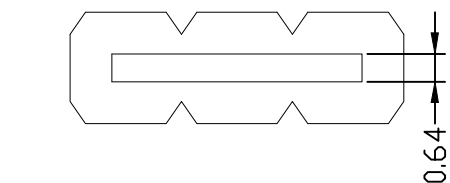

PCB LAYOUT

Ordering Code:

PHEU01 - 03 - X - X - X - X - 02
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 03
- ③ Contact Plating:
 G0: Gold flash S0: Selective
 G1: 3u" Gold S1: Selective 3u"
 G2: 5u" Gold S2: Selective 5u"
 G3: 10u" Gold S3: Selective 10u"
 G4: 15u" Gold S4: Selective 15u"
 G5: 30u" Gold S5: Selective 30u"
 SN: Tin
- ④ Pin Length:
 B: 0310=3.10mm
 Please mark the desired length in the B
- ⑤ Insulator Material:
 A: PBT
 B: PA6T
 C: LCP
 D: PA46
 E: PA9T
- ⑥ Packing:
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP
- ⑦ Number: 02

Unless Otherwise specified tolerance		 ATKCONN ELECTRONICS Http://www.atkconn.com
X. ±0.3	XX: ±0.2	
X.X: ±0X.2	XX: ±0.1	TITLE: 2.54mm Pin Header Single Row 45 Degrees Hook Type
SCALE: As Shown	UNIT: mm	
DRAW: ZLA	DATE: 24/04/2022	DRAWING NO: PHEU01-03XXXX02 PRODUCT NO: PHEU01-03XXXX02
CHECK: Bobbyang	DATE: 24/04/2022	
 3rd ANGLE PROJECTION		

REV	DESCRIPTION	DATE