

HSF



ROHS





### SPECIFICATION

Current Rating: 3 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65° C to +125° C  
 Contact Material: Brass  
 Insulator Material: PA9T, UL 94V-0 Black

### Ordering Code:

PHIS01 - X - X - D - A-B - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① Series No:
- ② No. of Contacts  
02 To 80
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3u" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN: Tin
- ④ Connector Type  
D: Dual
- ⑤ Pin Length:  
A:0900=9.00mm  
B:0300=3.00mm  
Please mark the desired length in the A/B
- ⑥ Insulator Material  
E: PA9T
- ⑦ Packing  
A: Tray B: Bag  
T: Tube U: Tube+CAP  
R: Tape&Reel  
W: Tape&Reel+CAP
- ⑧ Plastic High  
H: 2.30mm

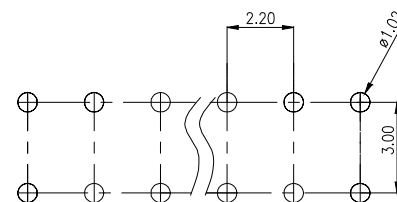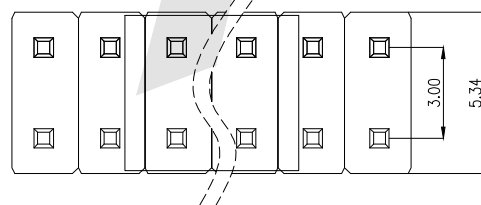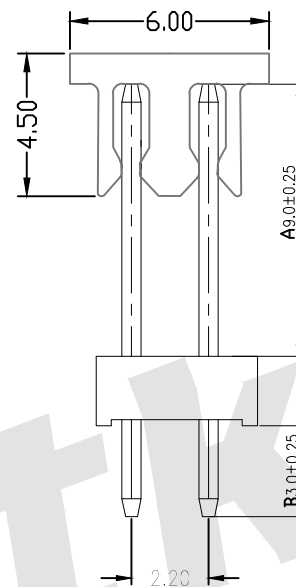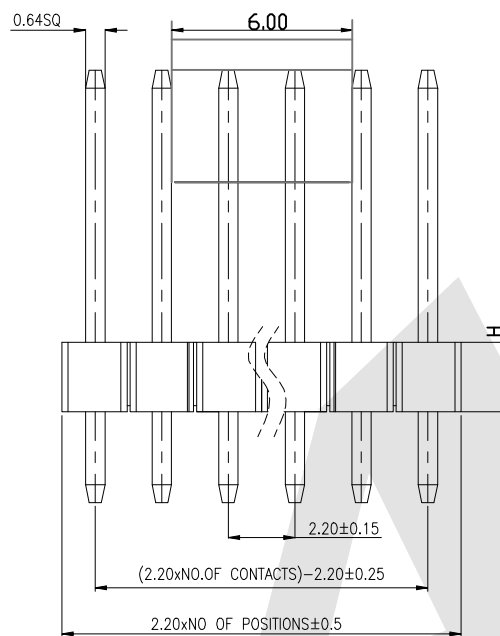

RECOMMENDED P.C.B LAYOUT  
( TOLERANCE ±0.05)

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW ZLA DATE 24/04/2022  
 CHECK BobYang DATE 24/04/2022



**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:  
2.2X3.0X2.3mm Pin Header DualRow Straight Type

DRAWING NO: PHIS01-XXD-0900-0300-XXX

PRODUCT NO: PHIS01-XXD-0900-0300-XXX

REV	DESCRIPTION	DATE