

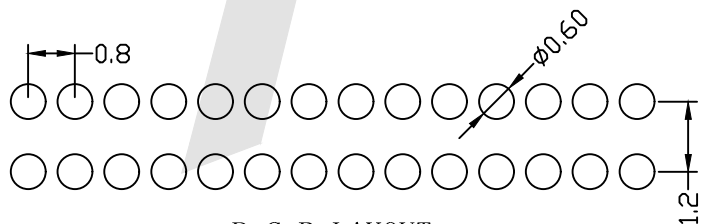
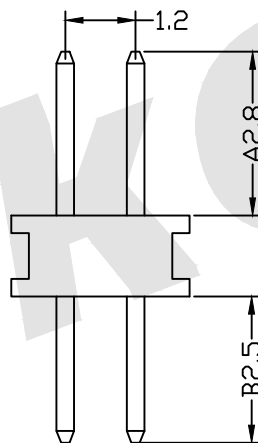


HSF

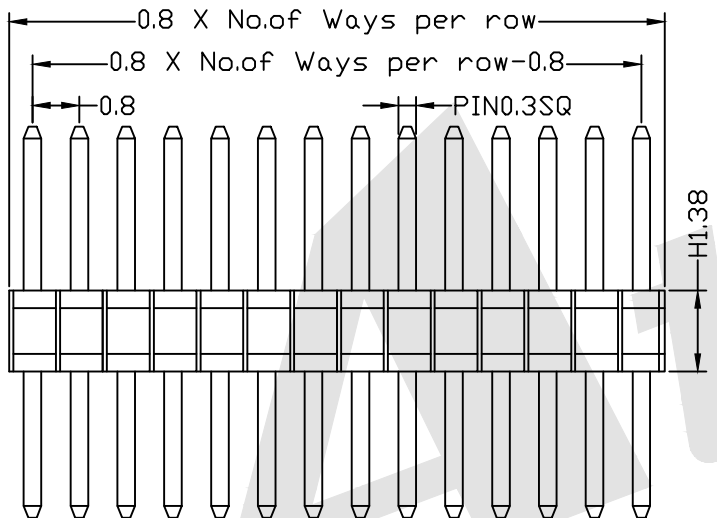

ROHS

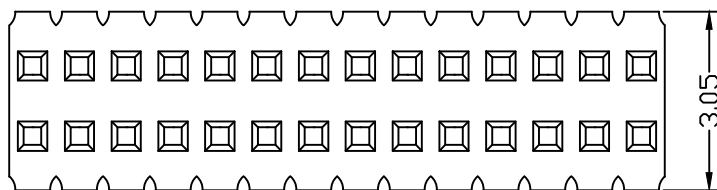

P. C. B LAYOUT

SPECIFICATION:

Current Rating: 0.75Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to+125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black


Ordering Code:

PHAS01 - X - X - D - A-B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN: Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A: 0280=2.80mm
 B: 0250=2.50mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material:
 B: PA6T E: PA9T
 C: LCP
- ⑦ Packing:
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 0.8mm Pin Header Straight Type Dual Row

DRAWING NO: PHAS01-XXD-0280-0250-XX

PRODUCT NO: PHAS01-XXD-0280-0250-XX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		