



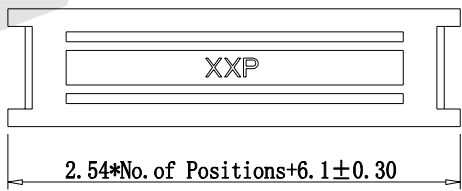
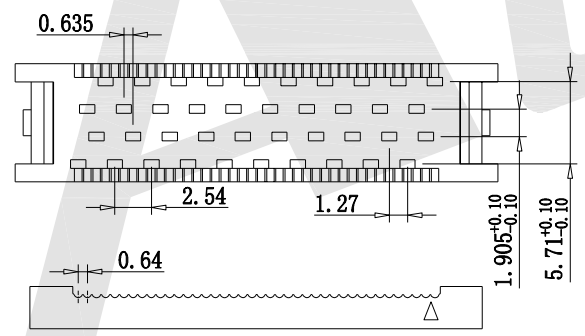

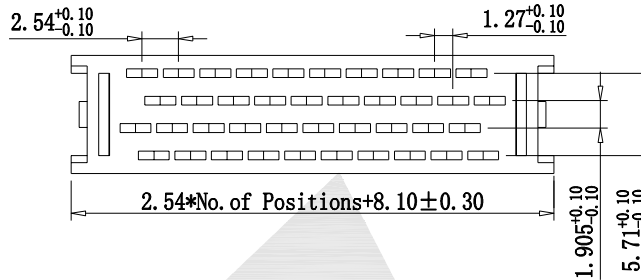


HSF

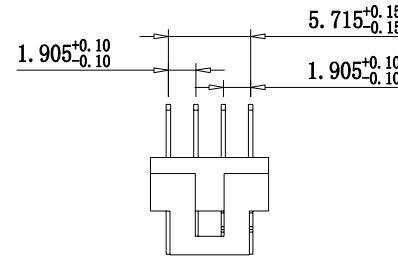

ROHS

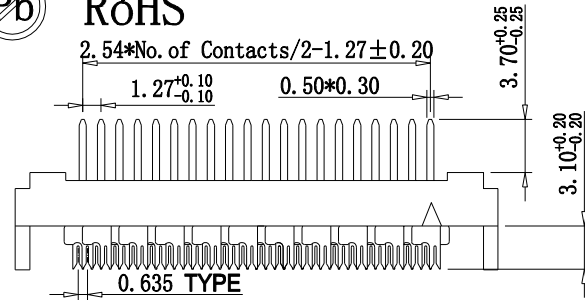

SPECIFICATION

Current Rating: 1.0Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40° C to +105° C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF UL 94V-0


Ordering Code:

FDBS02 - X - X - X - X
 ① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contacts: 40, 60, 68, 80, 100
- ③ Contact Plating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold, SN: Tin; S0: Gold flash/Ni, S1: 3u" Gold/Ni, S2: 5u" Gold/Ni, S3: 10u" Gold/Ni, S4: 15u" Gold/Ni, S5: 30u" Gold/Ni
- ④ Color Insulator: B:Black, G:Grey
- ⑤ Packing: A:Tray, B:Bag, C:Tube, D:Tape Reel

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/08/2022
 CHECK BobYang DATE 24/08/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 1.27*2.54mm DIP Plug Connector Four Row Foot

DRAWING NO: FDBS02-XXXX

PRODUCT NO: FDBS02-XXXX

REV	DESCRIPTION	DATE