




Technical requirements:

1. Materials shall meet Rosh requirements;
2. There should be no severe front on the surface (0.06);
3. Surface treatment: nickel plating, electroplating quality requirements: 2% concentration of brine, 48 hours
4. Refer to GB / t150115-200 - tolerance table for dimensions without tolerance indication;
5. After riveting, the spring should be upright, and the parts should not be deformed;
The riveted joint is firm and reliable with good conductivity
6. Belt specification: 0.3 (thickness) X36 (width) x15.1 (step length);Heat treatment (tempering) of cold rolled plate + carbon steel wire
Spring:;
7. The end face of the spring should be made safe, tempered and shaped $\phi 0.5\text{mm}$
8. Mark "★" is the key monitoring size.

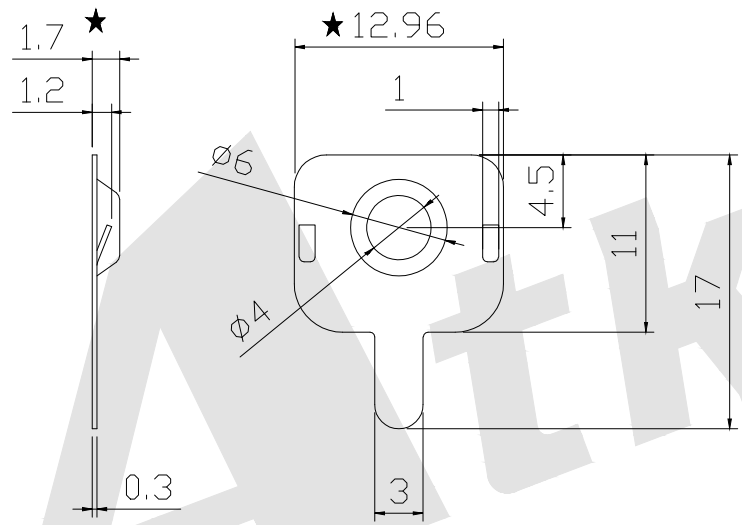

Positive

Order Code:

BS - S - SI - B - 173D
 ① ② ③ ④ ⑤

- ① BS: Battery Contacts
- ② Apperance for the product
S:180 TYPE
- ③ Contact Plating
SI:Nickel Plate
SN:Tin
G0:Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
- ④ Packing Method
A: Tray Packing
B: BAG PACKING
R: Tape & Reel Packing
- ⑤ Product Number
173D

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


| | |
|--------------------|--------------------|
| SCALE: As Shown | UNIT: mm |
| DRAW ZLA | DATE 21/07/2022 |
| CHECK BobYang | DATE 21/07/2022 |

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 5# Cell Battery Contacts(Positive) 173D

DRAWING NO: BS-S-SI-B-173DP

PRODUCT NO: BS-S-SI-B-173DP



| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |