

HSF






ROHS

SPECIFICATION

Current Rating: 1.5Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T UL 94V-0 Black

Ordering Code:

FHDR07 - X - X - D - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

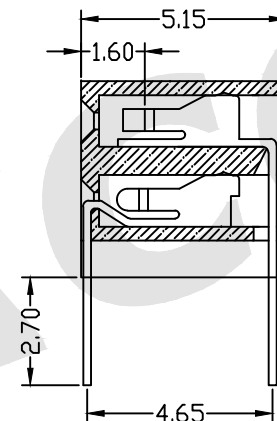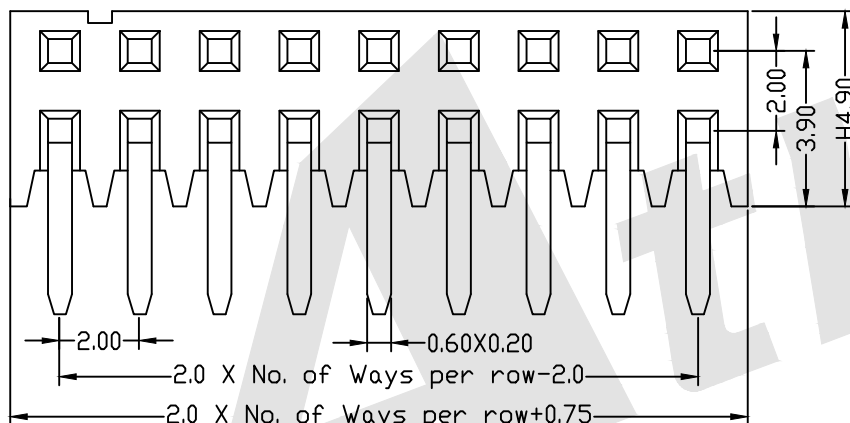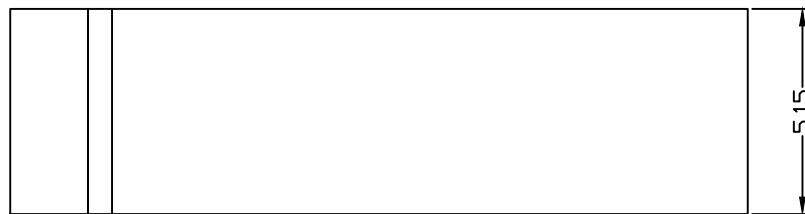

① Series No:


② No. of Contacts
02 To 80

③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"

④ Connector Type
D: Dual

⑤ Plastic High:
H:4.9
Please mark the desired length in the H


⑥ Insulator Material
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T
 Packing
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

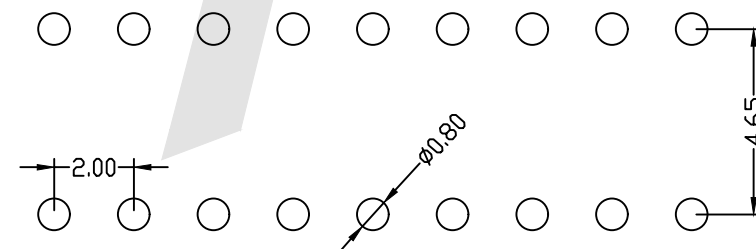

PCB LAYOUT

Unless Otherwise specified tolerance
 X. XX: ±0.20
 X. X: ±0.25
 X. XX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:
2.00mm Female Header Dual Row Angle Side Insert Type

DRAWING NO: FHDR07-XXDXXX

PRODUCT NO: FHDR07-XXDXXX

REV	DESCRIPTION	DATE