

HSF



ROHS





SPECIFICATIONS:

Current Rating:1Amp
 Insulation Resistance:3000M ohms min
 Contact Resistance:20M ohms max
 Dielectric Withstanding:AC500V
 Operating Temperature:-45° C to +105° C
 Contact Material:Brass
 Insulator Material:PA6T, UL94V-0

Ordering Code:

PHJS01 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{A-B}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$ - $\frac{X}{8}$


- ① Series No:
- ② No. of Contacts:
01 To 50
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
D:Double
- ⑤ Pin Length:
A: 0200=2.00mm
B: 0400=4.00mm
Please mark the desired length
in the A/C/B
- ⑥ Insulator Material:
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ⑧ Plastic High:
H=2.5mm

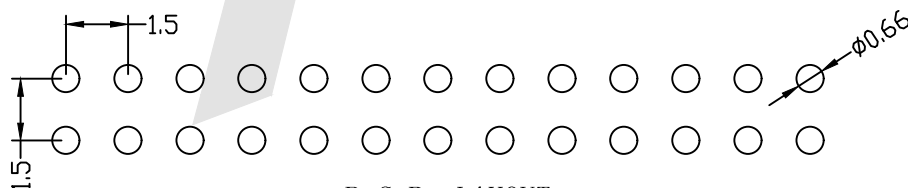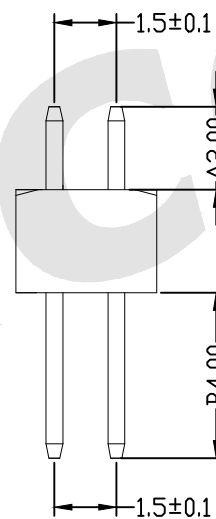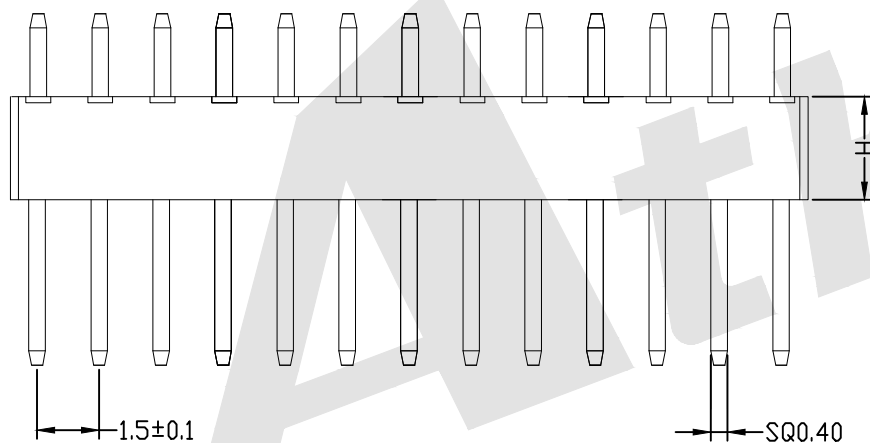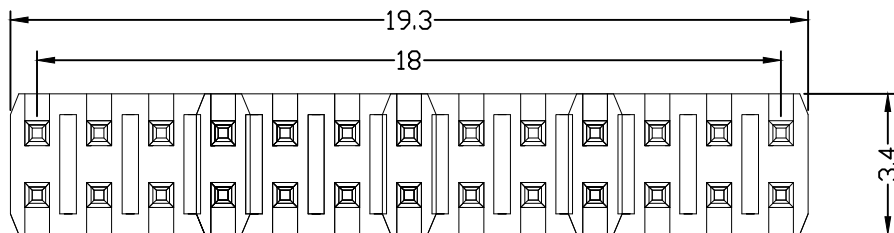

P. C. B LAYOUT

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:
 1.50mm Pin Header Straight Type Double Row

DRAWING NO: PHJS01-XXDXXXX
 PRODUCT NO: PHJS01-XXDXXXX

REV	DESCRIPTION	DATE