



HSF



ROHS

SPECIFICATION



Current Rating: 2.0Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0

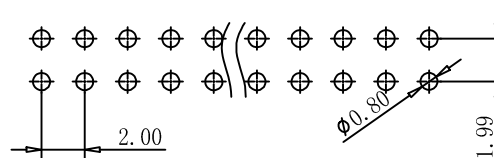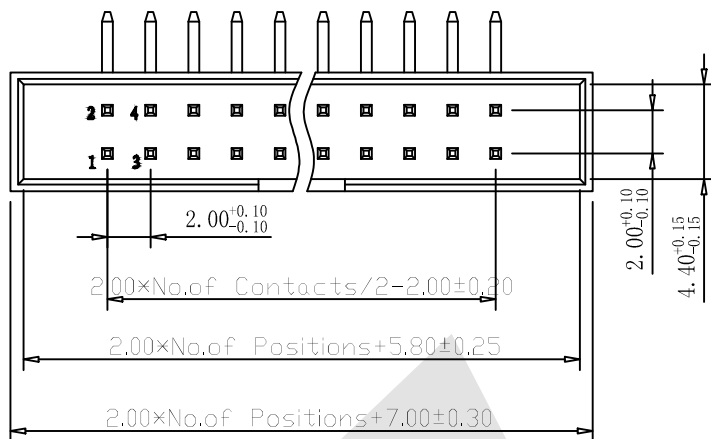

Ordering Code:


BHCR01 - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
 06 08 10 12 14 16 18
 20 22 24 26 28 30 34
 36 40 44 50 60 68
- ② No. of Contacts
- ③ Contact Plating:
 G0: Gold flash S0: Selective
 G1: 3u" Gold S1: Selective 3u"
 G2: 5u" Gold S2: Selective 5u"
 G3: 10u" Gold S3: Selective 10u"
 G4: 15u" Gold S4: Selective 15u"
 G5: 30u" Gold S5: Selective 30u"
 SN: Tin
- ④ Color Insulator
 B: Black
 U: Blue
 W: White
- ⑤ Insulator Material
 B: PA6T
 C: LCP
 E: PA9T
- ⑥ Packing
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP

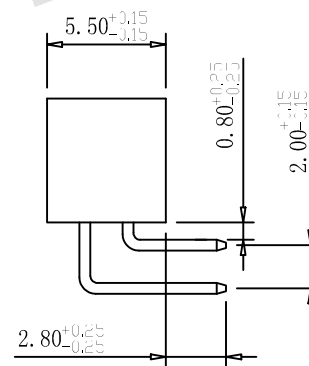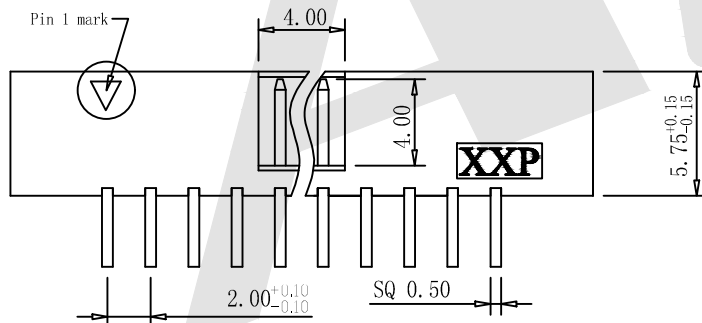

Unless Otherwise specified tolerance
 X. ± 0.35 X.XX: ± 0.20
 X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 2.00mm Box Header 90° H=5.75
 DRAWING NO: BHCR01-XXXX
 PRODUCT NO: BHCR01-XXXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		