





HSF

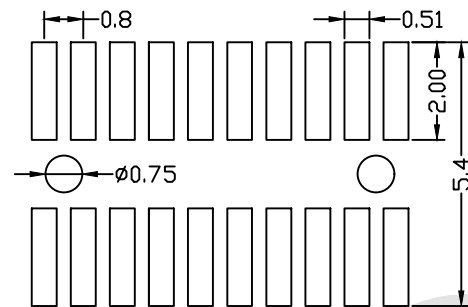

ROHS

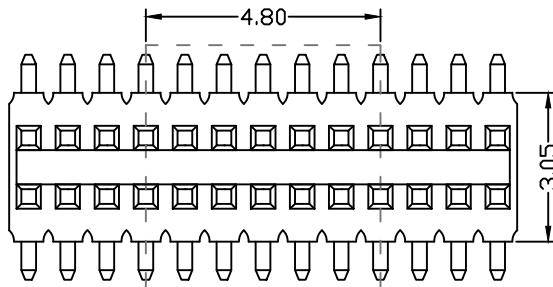

P. C. B LAYOUT

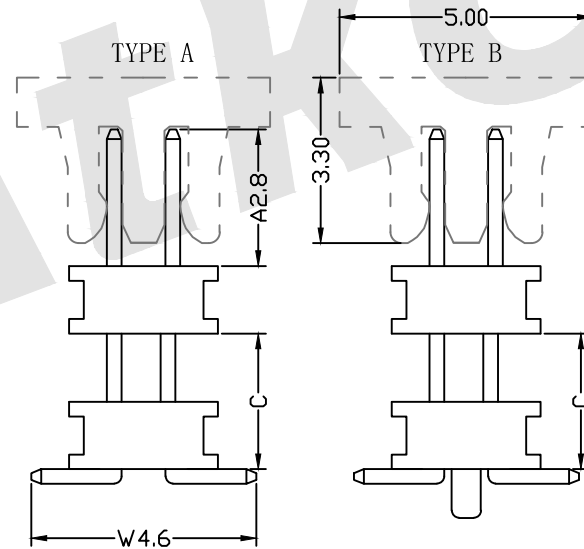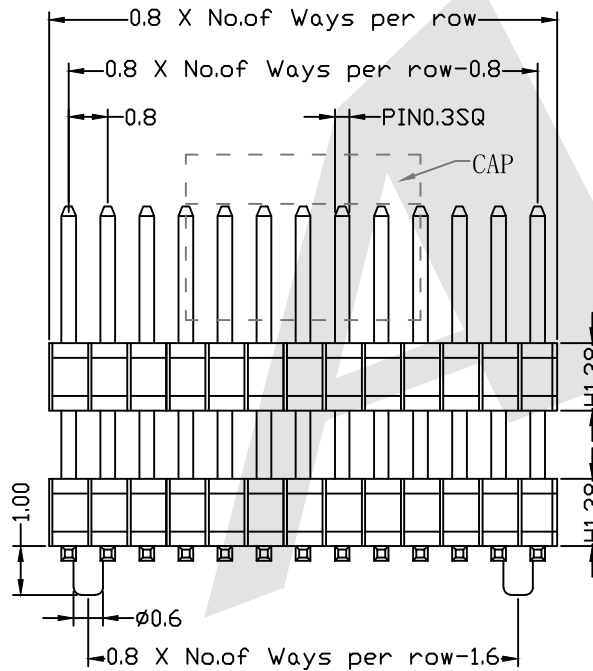

SPECIFICATIONS:

Current Rating: 0.75Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0, Color:Black


Ordering Code:

PHAM02 - X - X - D - A - C - W - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A:0280=2.80mm
 C:0300=3.00mm
 W:0460=4.60mm
 Please mark the desired length in the A/C/W
- ⑥ Insulator Material:
 B:PA6T E:PA9T
 C:LCP
- ⑦ Packing:
 A:Tray B:Bag
 T:Tube U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ With locating pegs option
 A:Type A without pegs
 B:Type B with pegs

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
 Http://www.atkconn.com

TITLE: 0.8mm Pin Header SMT Type
 Dual Row Double Plastic

DRAWING NO: PHAM02-XXD-0280-0300-0460-XXX

PRODUCT NO: PHAM02-XXD-0280-0300-0460-XXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		