

HSF



ROHS




SPECIFICATION:

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40° C to +105° C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0


Ordering Code:

BHAM04 - X - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
 06 08 10 14 16
 20 24 26 30 32
 34 40 44 50 60
 64 80 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Color Insulator
 B:Black
 U:Blue
 W:White
- ⑤ Insulator Material
 B:PA6T
 C:LCP
 E:PA9T
- ⑥ Plastic body height:
 H1: 8.20 H2:9.50
 H3:10.20 H4:11.50
 H5:12.10 H6:15.30
 H7:16.60
- ⑦ Packing
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

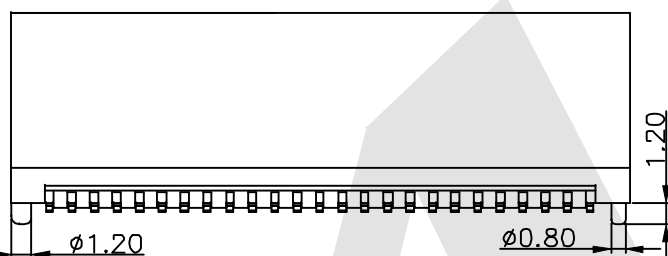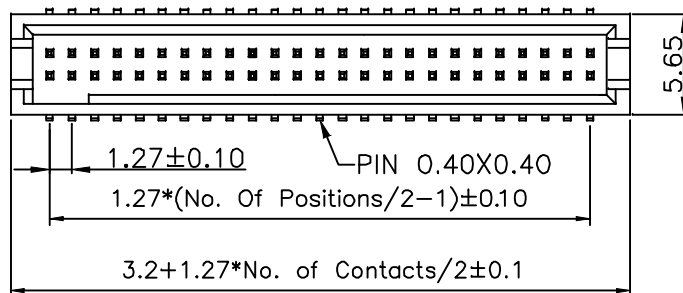

H1	8.20
H2	9.50
H3	10.20
H4	11.50
H5	12.10
H6	15.30
H7	16.60

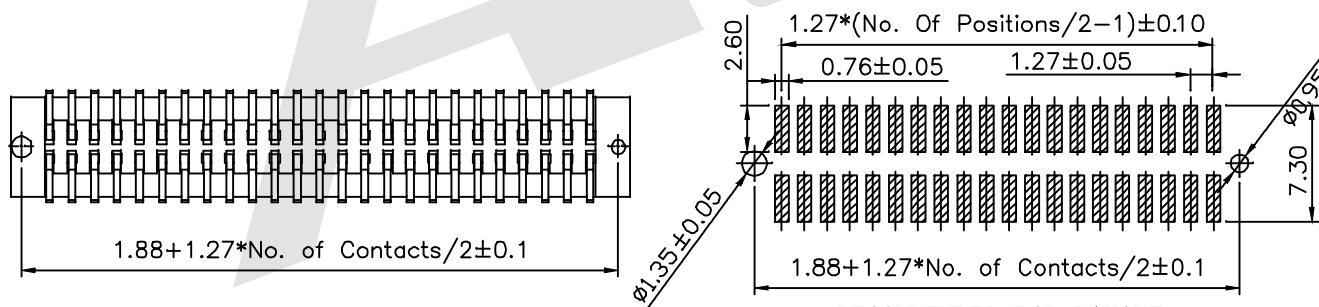


RECOMMENDED PCB LAYOUT
 (Tolerance: ±0.05)

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022

TITLE: 1.27mm Box Header SMT With post, High Profile



DRAWING NO: BHAM04-XXXXXXX
 PRODUCT NO: BHAM04-XXXXXXX

REV	DESCRIPTION	DATE